



DRYLIGHT®

IP65 OUTDOOR CHANDELIER

MASIERO

DRYLIGHT®

IP65 OUTDOOR CHANDELIER



MASIERO PRESENTA LA PRIMA
COLLEZIONE DI LAMPADE
PER ESTERNI ISPIRATE ALLA
TRADIZIONE VENEZIANA.

MASIERO INTRODUCES THE FIRST
COLLECTION OF OUTDOOR
LIGHTING FIXTURES INSPIRED
BY VENETIAN TRADITION.



TECNOLOGIA DRYLIGHT®
CON PROTEZIONE IP65:
SICUREZZA TOTALE IN OGNI
CONDIZIONE CLIMATICA.

DRYLIGHT® è il cuore della tecnologia di questo affascinante progetto di stile. È frutto di anni di ricerca del reparto R&D Masiero che è riuscito a sviluppare una tecnologia che risponde in maniera efficiente e definitiva a tre problematiche che fino ad oggi sembravano insormontabili:

- Protezione contro la penetrazione dell'acqua e della polvere, resistente alla corrosione
- Resistenza alle sollecitazioni, al vento ed agli urti
- Leggerezza, modularità e semplicità di installazione

La tecnologia DRYLIGHT®, brevetto industriale depositato, permette a MASIERO di offrire una linea completa di prodotti per l'illuminazione OUTDOOR con grado di protezione IP65. Grazie a questa tecnologia è oggi possibile allestire qualsiasi ambiente all'aperto con lampadari in stile.

DRYLIGHT® TECHNOLOGY
WITH IP65 PROTECTION LEVEL:
COMPLETE SAFETY IN ANY
WEATHER CONDITIONS.

DRYLIGHT® is the heart of the technology behind this fascinating style project. It is the result of years of research carried out by Masiero's R&D department, which has succeeded in developing a technology that has effectively and definitively resolved three problems, which up to now appeared to be unsolvable:

- Protection against water and dust, corrosion resistant
- Resistance to stress, wind and other impacts
- Lightness, modularity and easy installation

DRYLIGHT® technology, a filed industrial patent, permits MASIERO to offer a complete line of OUTDOOR lighting products with an IP65 protection level. Thanks to this technology, it is now possible to fit any outdoor environment with Venetian style chandeliers, with the same safety as a regular outdoor light.

DRYLIGHT IP65 CHANDELIER

CARATTERISTICHE DEL SISTEMA
DRYLIGHT® CON PROTEZIONE IP65:

FEATURES OF THE DRYLIGHT®
SYSTEM WITH IP65 PROTECTION:

VERSIONE EXTREME: EXTREME VERSION:

pendagli e prismi
in polycarbonato



VERSIONE PREMIUM: PREMIUM VERSION:

pendagli e ottagoni
in cristallo molato
(Consigliato per uso interno)






LINEA DRYLIGHT IP65

TOTALE PROTEZIONE CONTRO
L'ACQUA

LINE DRYLIGHT IP65

TOTAL PROTECTION AGAINST
WATER



ILLUMINAZIONE A LUCE LED
BIANCA OPPURE A LED RGBW

POSSIBILITÀ DI RICREARE
INFINITI SCENARI GRAZIE
ALLA TECNOLOGIA RGBW

WHITE LED LIGHTING
OR RGBW LED LIGHTING

POSSIBILITY TO RECREATE
COUNTLESS SCENARIO THANKS
TO RGBW TECHNOLOGY



COMPATIBILE CON
PROTOCOLLO DMX

GESTIBILE ATTRAVERSO I PIÙ
AVANZATI SISTEMI DOMOTICI

COMPATIBLE WITH
DMX PROTOCOLS

SUITABLE FOR THE
MOST ADVANCED HOME
AUTOMATION SYSTEMS



SEMPLICITÀ DI INSTALLAZIONE
E MANUTENZIONE

FORNITO GIÀ MONTATO,
LEGGERO E PRONTO ALL'USO

EASY INSTALLATION
AND LOW MAINTENANCE

LIGHTWEIGHT AND READY-FOR-
USE ARTICLES, NO ASSEMBLY
REQUIRED






RESISTENTE AI RAGGI UV
SVILUPPATO CON STRUTTURA IN PMMA CHE NON CRISTALLIZZA O INGIALLISCE, TESTATO PER GLI AMBIENTI ESTREMI

UV RESISTANT
THE STRUCTURE IS MADE OF PMMA, A MATERIAL NOT SUBJECT TO CRYSTALLIZATION OR YELLOWING, TESTED FOR EXTREME ENVIRONMENTS





RESISTENTE ALL'UMIDITÀ, ALLA POLVERE ED ALLA CORROSIONE
IDEALE PER UTILIZZI IN BAGNI, SPA E PISCINE. TESTATO IN NEBBIA SALINA, IDEALE PER AREE COSTIERE E UTILIZZI MARITTIMI

HUMIDITY, DUST AND CORROSION RESISTANT
SUITABLE FOR INSTALLATION IN BATHS, SPAS AND SWIMMING POOLS. TESTED IN SALINE FOG, IDEAL FOR COASTAL AREAS AND MARINE USE





RESISTENTE ALLE ALTE E BASSE TEMPERATURE
TESTATO IN CAMERA CLIMATICA CON ESCURSIONI TERMICHE RIPETUTE DA -30°C A +50°C

RESISTANT TO HIGH AND LOW TEMPERATURES
TESTED IN CLIMATE CHAMBER, WITH A TEMPERATURE RANGE FROM -30°C TO +50°C





RESISTENTE ALLE SOLLECITAZIONI E AL VENTO
TESTATO IN GALLERIA DEL VENTO FINO AD OLTRE 80 KM/H (SOLO VERSIONE EXTREME)

RESISTANT TO STRESS AND WIND
TESTED IN WIND TUNNEL, WITH WIND SPEEDS HIGHER THAN 80 KM/H (EXTREME VERSION ONLY)

DRYLIGHT LED



DRYLIGHT LED WHITE:

Singolo diodo led WHITE = 3000K, 160 lm

DRYLIGHT LED WHITE:

Single diode led WHITE = 3000K, 160 lm



DRYLIGHT LED RGBW:

Singolo diodo led Red = 50 lm
Singolo diodo led Green = 90 lm
Singolo diodo led Blue = 30 lm
Singolo diodo led White = 100 lm
Luce bianca Composita = 160 lm

DRYLIGHT LED RGBW:

Single diode led Red = 50 lm
Single diode led Green = 90 lm
Single diode led Blue = 30 lm
Single diode led White = 100 lm
Composite white light = 160 lm

DRYLIGHT IP65 CHANDELIER



DRYLIGHT S24

Ø 106 cm	Ø 41.73"
H 190 cm	H 74.80"



DRYLIGHT S18

Ø 106 cm	Ø 41.73"
H 150 cm	H 59.05"



DRYLIGHT TL6

Ø 68 cm	Ø 26.77"
H 120 cm	H 47.24"



DRYLIGHT STL6

Ø 68 cm	Ø 26.77"
H 250 cm	H 98.43"



DRYLIGHT S12

Ø 106 cm	Ø 41.73"
H 135 cm	H 53.15"



DRYLIGHT S6

Ø 68 cm	Ø 26.77"
H 125 cm	H 49.21"



DRYLIGHT A2

L 40 cm	L 15.74"
H 35 cm	H 13.77"
SP 30 cm	SP 11.81"



ROSONE - CANOPY


Ø 20 cm	Ø 7.87"
H 67,5 cm	H 26.57"

DRYLIGHT

S6

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

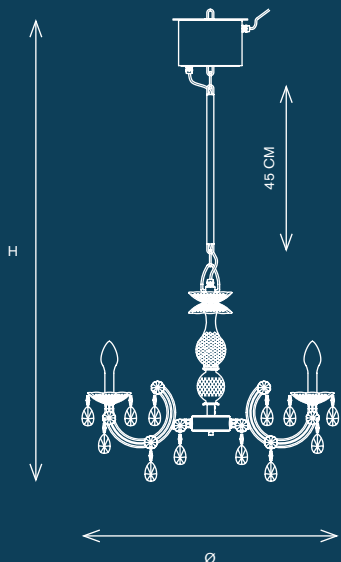

WT EXTREME 5,3 kg
WT PREMIUM 6,7 kg

Ø 68 cm
H 125 cm
con rod H 45 cm
Opzionale: rod H 35 cm; rod H 25 cm

DRYLIGHT EXTREME: pendagli in metacrilato
DRYLIGHT PREMIUM: pendagli in cristallo
(Versione Premium consigliata per uso interno)

Ø 26.77"
H 49.21"
with rod H 17.71"
Opzional: rod H 13.78"; rod H 9.84"

DRYLIGHT EXTREME: methacrylate pendants
DRYLIGHT PREMIUM: crystal pendants
(Premium Version recommended for internal use only)

6 x LED / LED driver included
DRYLIGHT LED W: 3000K, 18 W tot, 960 lm
DRYLIGHT LED RGBW: 24W tot, 960 lm tot

CE F IP65






DRYLIGHT S12

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

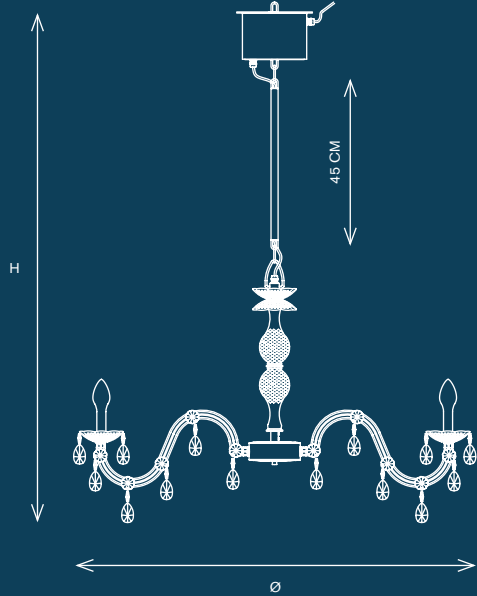

WT EXTREME 8,6 kg
WT PREMIUM 11,4 kg

Ø 106 cm
H 135 cm

con rod H 45 cm
Opzionale: rod H 35 cm; rod H 25 cm

DRYLIGHT EXTREME: pendagli in metacrilato
DRYLIGHT PREMIUM: pendagli in cristallo
(Versione Premium consigliata per uso interno)

Ø 41.73"
H 53.15"

with rod H 17.71"
Opzional: rod H 13.78"; rod H 9.84"

DRYLIGHT EXTREME: methacrylate pendants
DRYLIGHT PREMIUM: crystal pendants
(Premium Version recommended for internal use only)

12 x LED / LED driver included

DRYLIGHT LED W: 3000K, 36 W tot, 1920 lm
DRYLIGHT LED RGBW: 48W tot, 1920 lm tot

CE F IP65






DRYLIGHT

S18

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

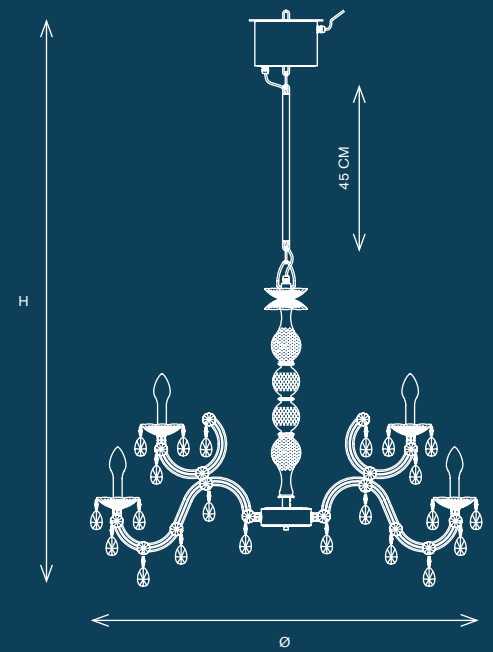

Technical diagram of the DRYLIGHT S18 chandelier. It shows a side view with a vertical rod of height 45 cm and a horizontal arm of diameter Ø. The total height is labeled 'H' and the total width is labeled 'Ø'.

WT EXTREME 14,1 kg
WT PREMIUM 18,2 kg

Ø 106 cm
H 150 cm

con rod H 45 cm
Opzionale: rod H 35 cm; rod H 25 cm

DRYLIGHT EXTREME: pendagli in metacrilato
DRYLIGHT PREMUM: pendagli in cristallo
(Versione Premium consigliata per uso interno)

Ø 41.73"
H 59.05"

with rod H 17.71"
Opzional: rod H 13.78"; rod H 9.84"

DRYLIGHT EXTREME: methacrylate pendants
DRYLIGHT PREMUM: crystal pendants
(Premium Version recommended for internal use only)

18 x LED / LED driver included

DRYLIGHT LED W: 3000K, 54 W tot, 2880 lm
DRYLIGHT LED RGBW: 72W tot, 2880 lm tot

CE F IP65






DRYLIGHT S24

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

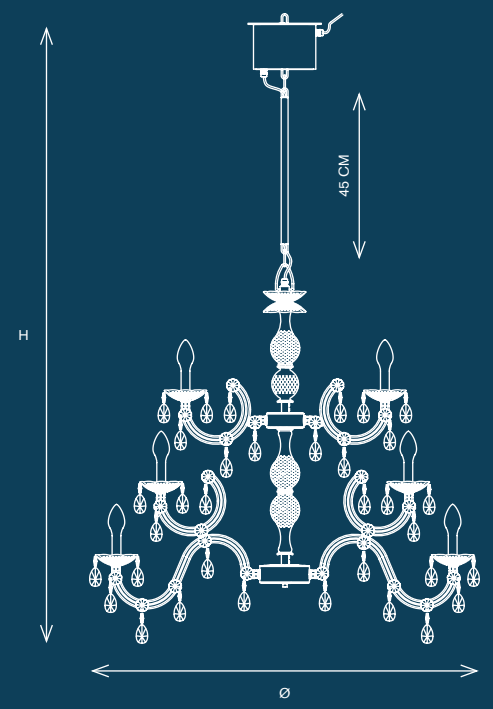

Technical diagram of the DRYLIGHT S24 chandelier. It shows a top-down view with a central vertical rod and a horizontal base. The diagram includes dimension lines for height (H), diameter (Ø), and a specific height of 45 CM for the rod. The chandelier has multiple arms with light fixtures and decorative elements.

WT EXTREME 20,5 kg
WT PREMIUM 26,7 kg

Ø 106 cm
H 190 cm

con rod H 45 cm
Opzionale: rod H 35 cm; rod H 25 cm

DRYLIGHT EXTREME: pendagli in metacrilato
DRYLIGHT PREMIUM: pendagli in cristallo
(Versione Premium consigliata per uso interno)

Ø 41.73"
H 74.80"

with rod H 17.71"
Opzional: rod H 13.78"; rod H 9.84"

DRYLIGHT EXTREME: methacrylate pendants
DRYLIGHT PREMIUM: crystal pendants
(Premium Version recommended for internal use only)

24 x LED / LED driver included

DRYLIGHT LED W: 3000K, 72 W tot, 3840 lm
DRYLIGHT LED RGBW: 96W tot, 3840 lm tot

CE F IP65






DRYLIGHT

TL6

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

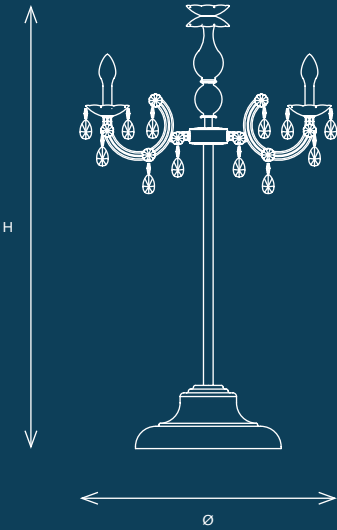

Ø 68 cm
H 120 cm

DRYLIGHT EXTREME: pendagli in metacrilato
DRYLIGHT PREMUM: pendagli in cristallo
(Versione Premium consigliata per uso interno)

Ø 26.77"
H 47.24"

DRYLIGHT EXTREME: methacrylate pendants
DRYLIGHT PREMUM: crystal pendants
(Premium Version recommended for internal use only)

6 x LED / LED driver included

DRYLIGHT LED W: 3000K, 18 W tot, 960 lm
DRYLIGHT LED RGBW: 24W tot, 960 lm tot

CE F IP65





DRYLIGHT

STL6

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

Ø 68 cm
H 250 cm

DRYLIGHT EXTREME: pendagli in metacrilato
DRYLIGHT PREMUM: pendagli in cristallo
(Versione Premium consigliata per uso interno)


Ø 26.77"
H 98.43"

DRYLIGHT EXTREME: methacrylate pendants
DRYLIGHT PREMUM: crystal pendants
(Premium Version recommended for internal use only)

6 x LED / LED driver included

DRYLIGHT LED W: 3000K, 18 W tot, 960 lm
DRYLIGHT LED RGBW: 24W tot, 960 lm tot

CE F IP65

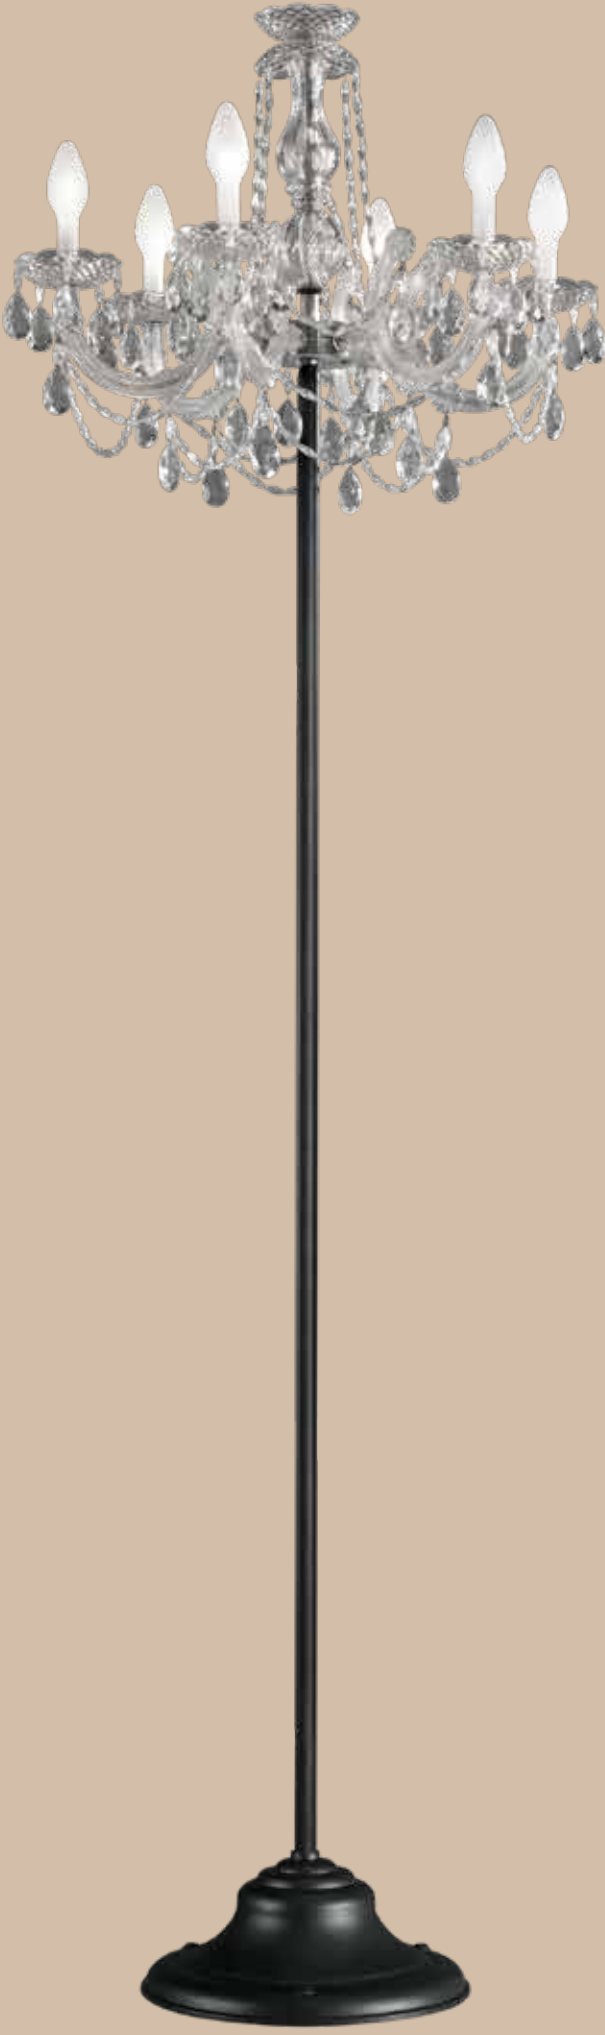




DRYLIGHT


A2

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

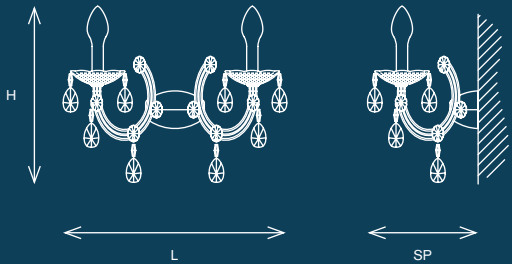

WHITE VERSION

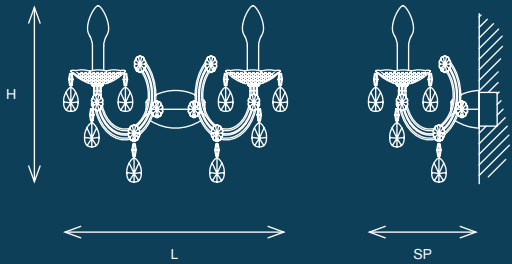

RGBW VERSION

L 40 cm
H 35 cm
SP 30 cm

DRYLIGHT EXTREME: pendagli in metacrilato
DRYLIGHT PREMUM: pendagli in cristallo
(Versione Premium consigliata per uso interno)

L 15.74"
H 13.77"
SP 11.81"

DRYLIGHT EXTREME: methacrylate pendants
DRYLIGHT PREMUM: crystal pendants
(Premium Version recommended for internal use only)

2 x LED / LED driver included

DRYLIGHT LED W: 3000K, 6 W tot, 320 lm
DRYLIGHT LED RGBW: 8W tot, 320 lm tot

CE F IP65



DRYLIGHT A2 WHITE



DRYLIGHT A2 RGB-W






DRYLIGHT RGBW LED

IP65 OUTDOOR

Design by:
STUDIO STILE MASIERO

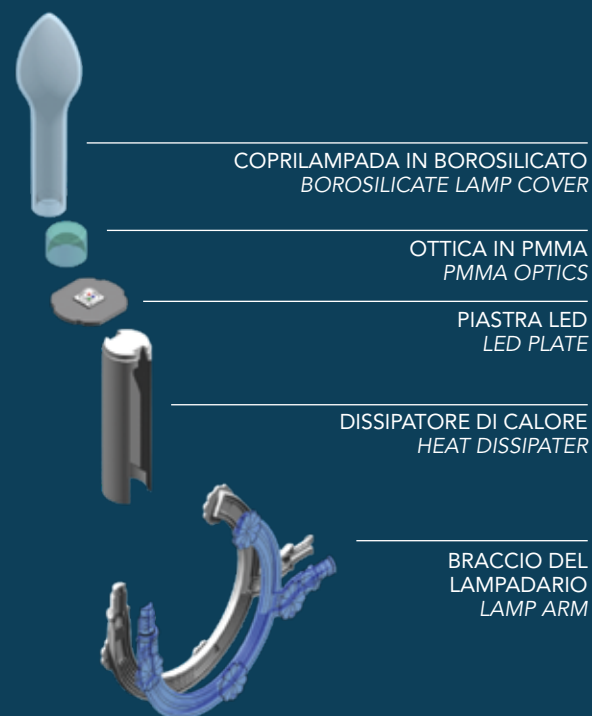

CE F IP65

DRYLIGHT incorpora un sistema LED RGB-W specificamente disegnato ed ingegnerizzato per rispondere in modo efficiente alle esigenze di affidabilità e robustezza. Non utilizza dunque componenti LED standard in commercio, o semplici lampadine commerciali, bensì una sofisticata soluzione brevettata. Composta da un dissipatore, una piastra LED a 4 diodi ed un gruppo ottico dedicati connessi ad una centralina elettronica, consente di realizzare infiniti scenari di intensità e colore della luce. DRYLIGHT è disponibile in versione RGB-W, ovvero con la possibilità di generare un'infinita gamma di colori, oppure in versione WHITE, con la possibilità di intervenire solo sull'intensità della luce bianca.

DRYLIGHT incorporates a LED RGB-W system specifically designed and engineered to efficiently meet the needs for reliability and strength. Consequently, standard LED components available on the market are not used, nor simple commercial bulbs, but a sophisticated patented system. It comprises a dissipater, a 4 diode LED plate and an optic unit that is connected to an electronic control unit, to create endless combinations of light intensity and colour. DRYLIGHT is available in the RGB-W version, with an infinite colour range available, or the WHITE version, where only the intensity of the white light can be adjusted.







DRYLIGHT RGBW CONTROL

DRYLIGHT È DOTATO DI UNA CENTRALINA DI CONTROLLO CHE CONSENTE DI GESTIRE TUTTE LE FUNZIONI IN BASE ALLE ESIGENZE DELL'UTILIZZATORE.

DRYLIGHT IS EQUIPPED WITH A CONTROL UNIT TO MANAGE ALL THE FUNCTIONS ACCORDING TO THE USER'S SPECIFIC NEEDS.

Ogni dispositivo può essere fornito con uno di questi sistemi di gestione:

- **RADIOCOMANDO:**

Ogni singolo dispositivo può essere controllato con un radiocomando. Su richiesta, un unico telecomando può gestire più dispositivi diversi.

- **APP SU SMARTPHONE O TABLET:**

MASIERO ha sviluppato una APP disponibile per sistemi iOS e Android che, con un'interfaccia semplice ed intuitiva, permette di gestire un numero infinito di dispositivi, contemporaneamente oppure singolarmente.

- **DOMOTICA COMPATIBILE DMX**

I dispositivi DRYLIGHT possono essere integrati nei sistemi domotici di qualsiasi abitazione siano essi gestiti con protocollo DMX.

Each appliance can be fitted with one of the following control systems:

- **RADIO CONTROL:**

Each single appliance can be controlled with a remote radio control. On request, a single remote control can manage a number of appliances.

- **APP ON SMARTPHONE OR TABLET:**

MASIERO has developed an APP for iOS and Android systems, and with a simple user-friendly interface it enables controlling an infinite number of appliances simultaneously or individually.

- **DMX COMPATIBLE HOME AUTOMATION SYSTEM**

DRYLIGHT appliances can be incorporated into any home automation system, whether they are DMX controlled.



RADIO CONNECTION
WITH REMOTE CONTROL



WI-FI CONNECTION WITH
"MASIERO SMART LIGHT" APP



DMX CONNECTION
WITH DOMOTIC NET




MASIERO SMART LIGHT APP



CON LA APP MASIERO SMART LIGHT SI POSSONO GESTIRE UN NUMERO INFINITO DI DISPOSITIVI, TRAMITE IL SISTEMA HOST-SLAVE.

WITH THE MASIERO SMART LIGHT APP, AN INFINITE NUMBER OF APPLIANCES CAN BE CONTROLLED THROUGH THE HOST-SLAVE SYSTEM.

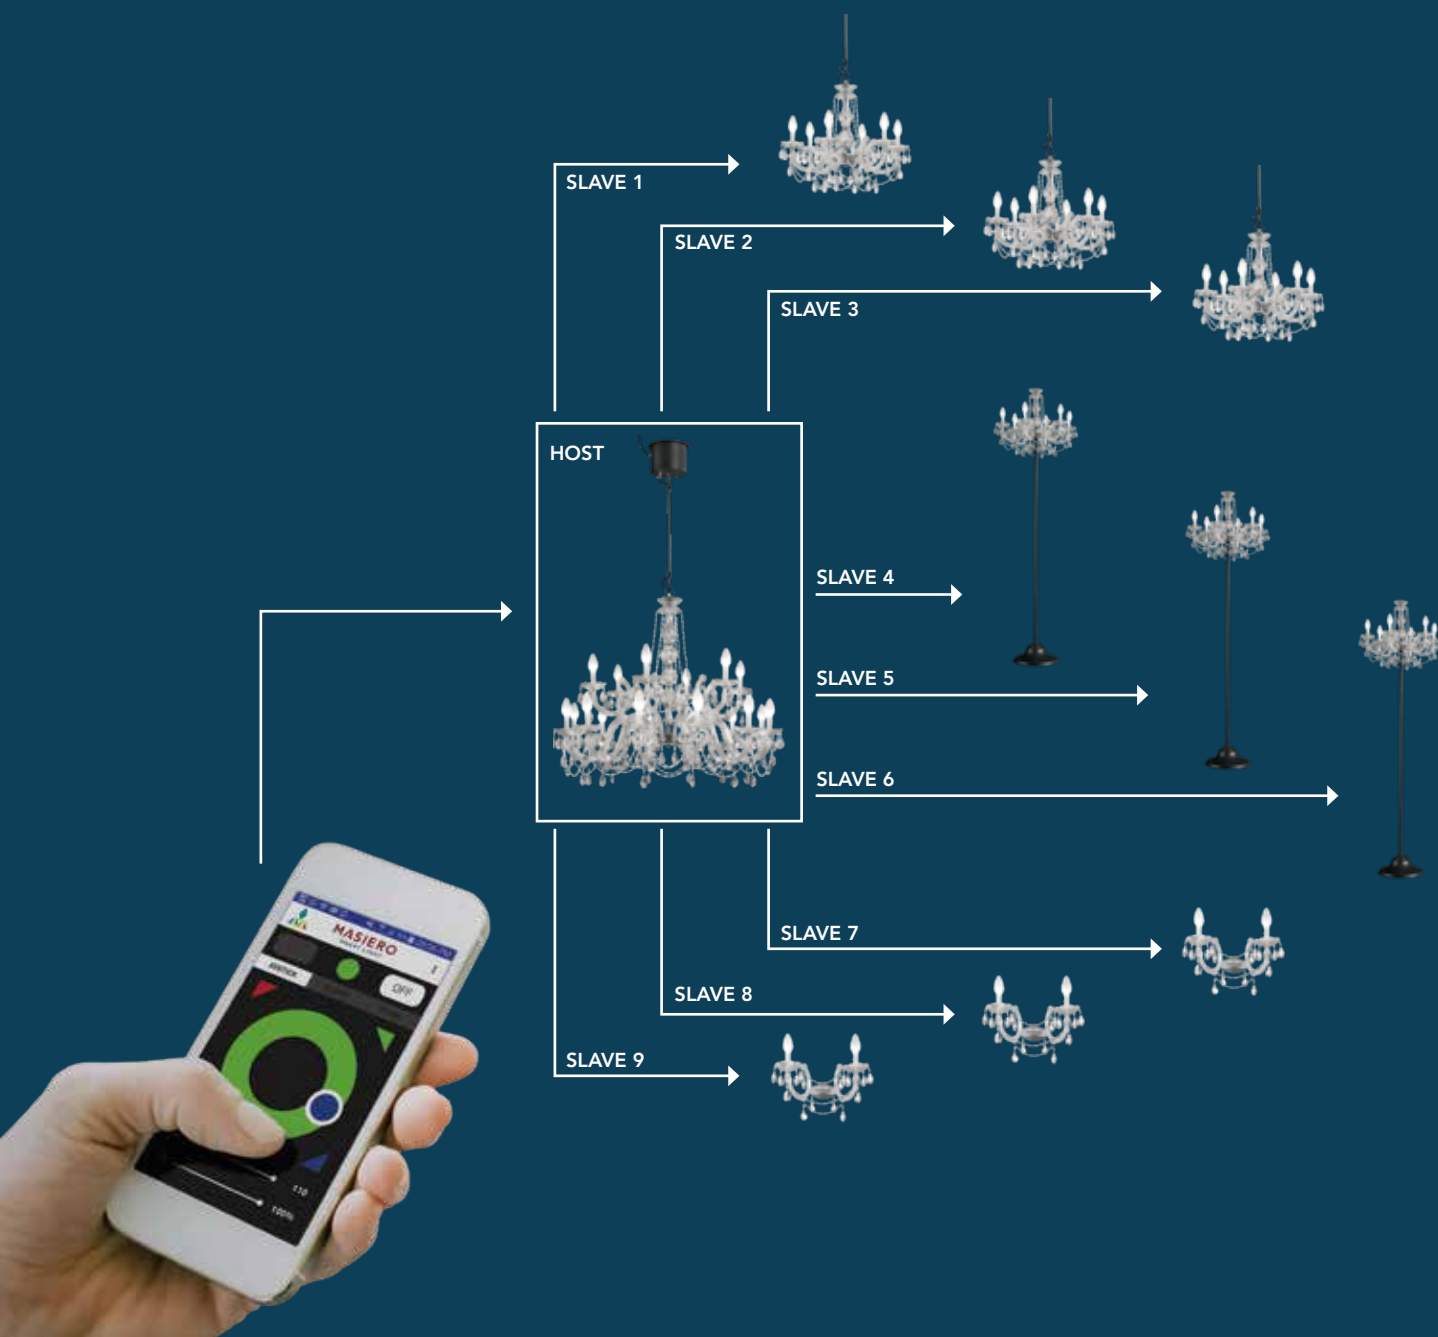

PORTABLE FLOOR LAMP

I DUE MODELLI DI PIANTANA DRYLIGHT SONO DISPONIBILI ANCHE CON ALIMENTAZIONE A BATTERIA.

- Pacco batteria agli ioni di litio
- Autonomia 10 ore
- Tempo di ricarica 5 ore

Le piantane integrano sia un'antenna Wi-Fi che un ingresso per cavo DMX. In questo modo, luce e scenari luminosi possono essere gestiti mediante la APP su smartphone o tablet, oppure attraverso la centralina elettronica di controllo di un qualsiasi sistema domotico con protocollo DMX.

THE TWO MODELS OF DRYLIGHT FLOOR LAMP ARE ALSO AVAILABLE WITH BATTERY POWER.

- Lithium ion battery pack
- 10 hours autonomy
- 5 hours to recharge

The floor lamps integrate a Wi-Fi antenna and a DMX lead input. This way light and lighting effects can be controlled from the APP on a smartphone or tablet, or from the electronic control unit of any home automation system equipped with DMX protocol.



DRYLIGHT SUPPORT

IP65 OUTDOOR

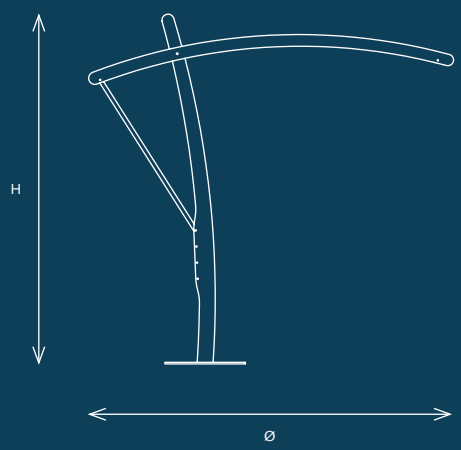


Diagram illustrating the adjustable height (H) and width (Ø) of the DRYLIGHT Support structure.


L 2300 cm - 2720 cm
H 3350 cm - 2600 cm

Struttura in metallo zincato e verniciato con altezza regolabile. Base predisposta per il fissaggio a terra.
Base a croce 130 cm x 130 cm per piastre quadrate in materiale cementizio.
Si consiglia di installare 4 piastre quadrate 60 cm x 60 cm con peso di 33 kg ciascuno.

L 905.51" - 1.070.86"
H 1.318.90" - 1.023.62"

*Zin-coated and painted metal structure with adjustable height. Base geared for fixing to the ground.
Base 51.18" x 51.18" with cross brackets for square concrete slabs.
We suggest to fix 4 square slabs 23.62" x 23.62", 33 Kg each.*

ALTEZZE RAGGIUNGIBILI
AVAILABLE HEIGHTS

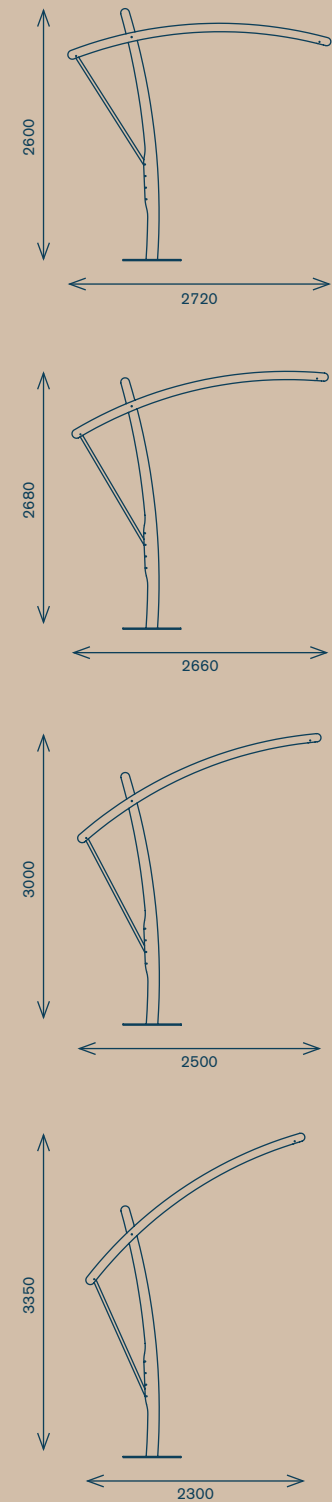

SUGGERIMENTI
D'IMPIEGO

*SUGGESTIONS
FOR USE*

























MASIERO

MASIERO S.R.L. VIA PESCHIERE, 53
31032 LOC. CONSCIO DI CASALE SUL SILE (TREVISO) ITALY
TEL. +39 0422 7861 FAX +39 0422 786250

info@masierogroup.com

www.masierogroup.com



Ogni riproduzione anche parziale è vietata.
© by Masiero 2019
Tutti i diritti riservati.

Any reproduction even partial is strictly prohibited.
© by Masiero 2019
All rights reserved.

Art direction: GIOVANNI BATTISTA GIANOLA

Design by: ARGINE

Print: GRAFICA ANTIGA

