

*Zodiac*


A  
New  
Lighting  
Trend

T  
U  
N  
A  
B  
L  
E  
.  
W  
H  
I  
T  
E



# Human Centric Lighting (HCL)


Human beings and their concerns have become increasingly important. Lighting supports this trend with groundbreaking concepts for Human Centric Lighting (HCL), which focus on humans and the optimal light for their needs. The interplay of light and room climate creates an atmosphere that has a positive impact on the well-being of humans as well as on their productivity and health.

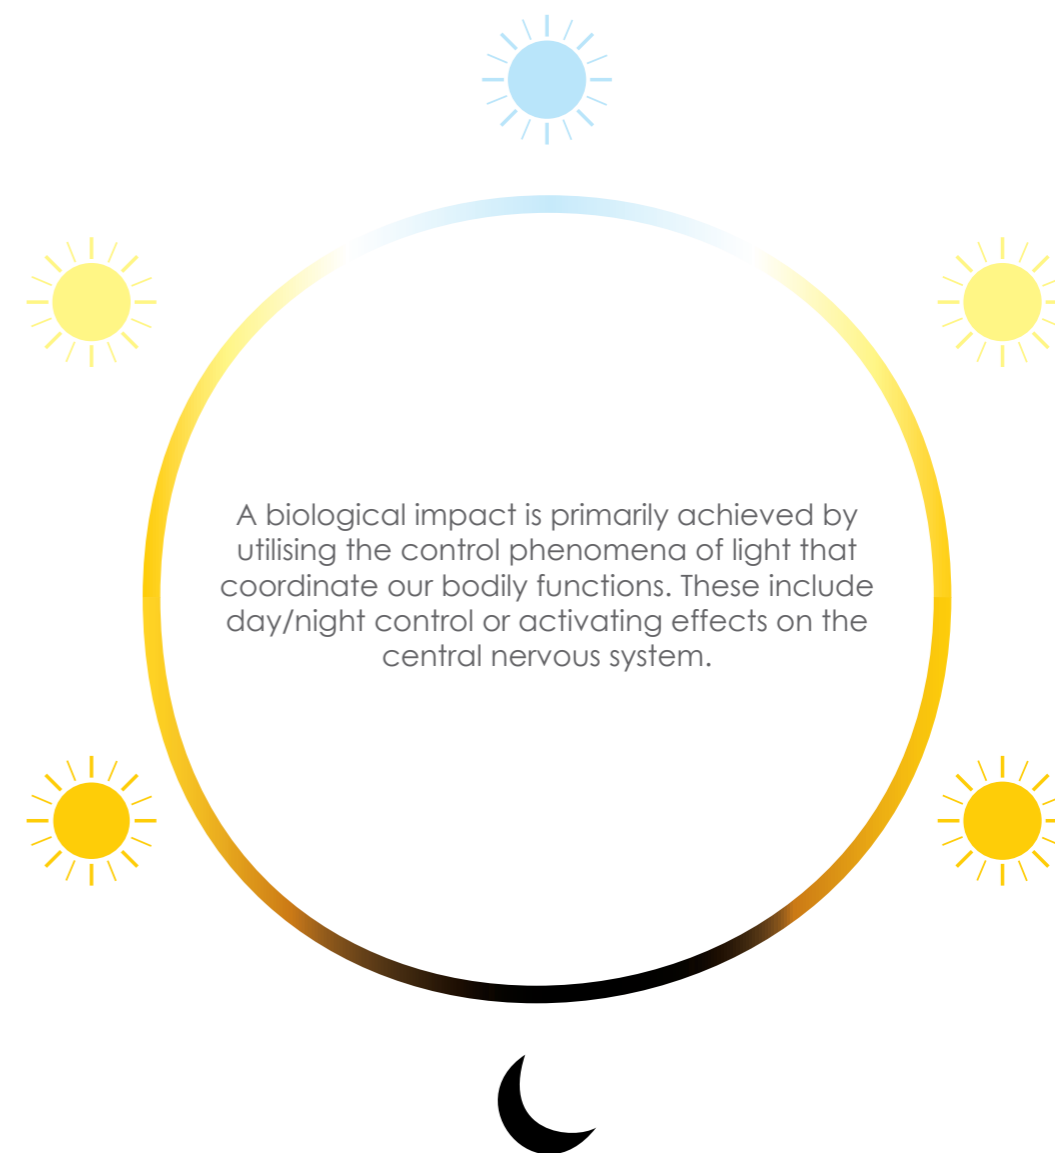

# Tunable White vs HCL


Tunable White is about the personal comfort of the individual; HCL focuses on the biological impact.

*Tunable White provides the technological opportunity to plan HCL solutions in the best possible way.*

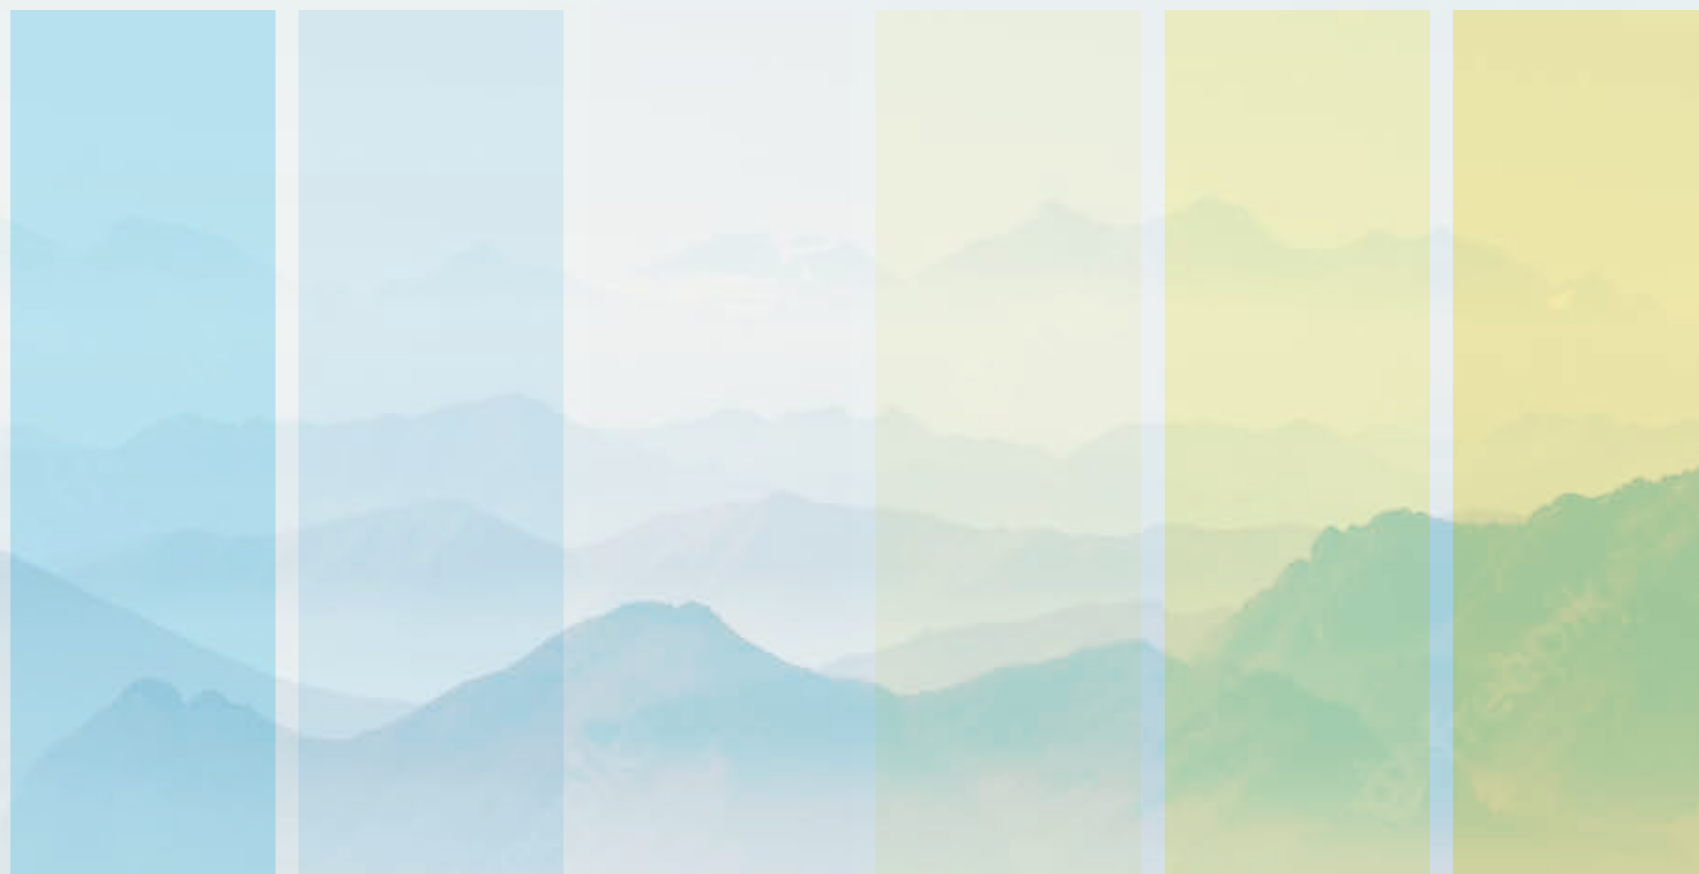

# Tunable White

Seamlessly adjustable colour temperatures, from cool white to warm white, bring natural lighting effects, with all of the associated advantages, from outside to inside, and make it possible to properly target individual needs and situations.

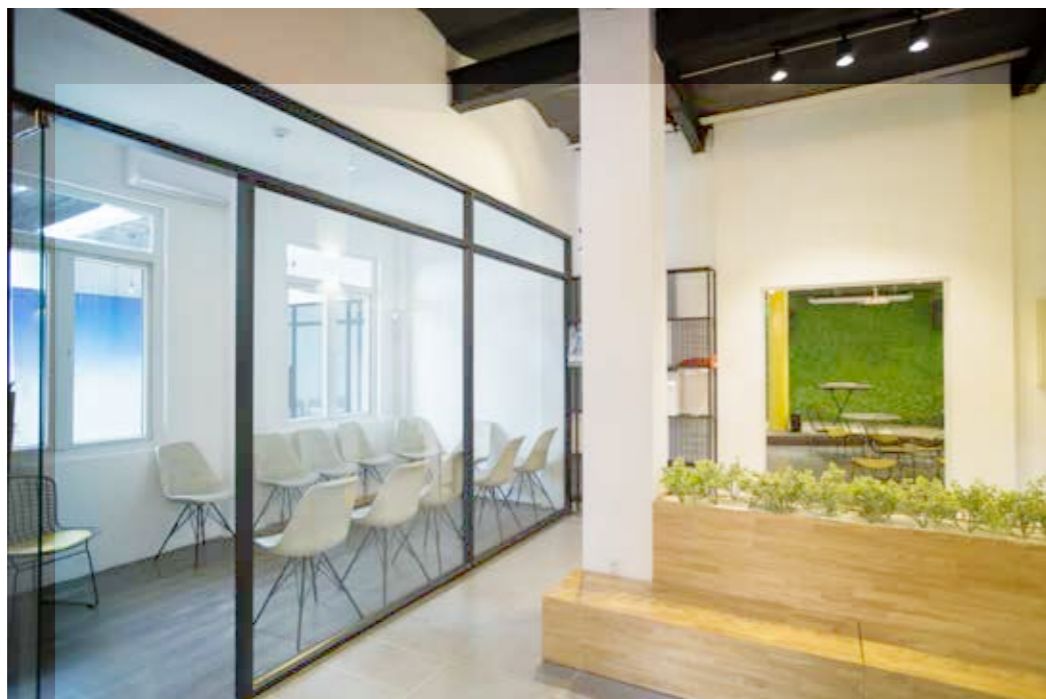

## On Human Body

Cool white light with a high proportion of blue light has a stimulating effect and promotes concentration, whereas warm white light is calming. Therefore, Tunable White creates an environment that helps us in a natural way.

By simulating the impact of natural daylight, biologically effective artificial light synchronises humans with the outside world. dynamic lighting solutions simulating the natural course of daylight significantly improve concentration and productivity as well as alertness and quality of sleep.

## On Environment/ Object

Colour Temperatures give rooms a characteristic atmosphere and underline the beauty and brilliance of different object and surfaces. With the right light spectrum, colours can be emphasised and powerfully presented.

Tunable White not only reproduces colours authentically, but its effects can be further amplified using the right colour temperature. The flexible adjustment of Tunable White also makes it easy to test how products look in different lighting moods.



# Application Of Tunable White



Morning  
09:00



Afternoon  
12:00



Evening  
18:00

## Residential

Work-from-Home become a new trend. Easily to switch relaxing mode to the working mode, or reverse, by using Tunable White technology.



## Hospital

Increase the speed of recovery.

Lighting researchers, hospitals, and senior living facilities are examining the potential for Tunable White - induced circadian stimulus to enhance comfort, accelerate healing, increase wakefulness during the day and increase hours of continuous sleep at night.



Morning  
09:00



Afternoon  
12:00



Evening  
18:00

## Office / Commerical


Higher Productivity during working hours (5000K from 9:00 a.m. to 5:00 p.m.) and relax atmosphere (2700K after 5:00 p.m.) after working hours. A warm room with gentle, reduced light promotes the generation of ideas.





## Retail

Change CCT to fit for season sales (Summer Time → Energetic ; Winter Time → Glamorous / Elegant). Retailers are examining the potential for increased sales and foot traffic based on tuning the light. It might also be used as an “alert” function. For example, some change in light level and Colouration might precede an announcement about specific sale items.

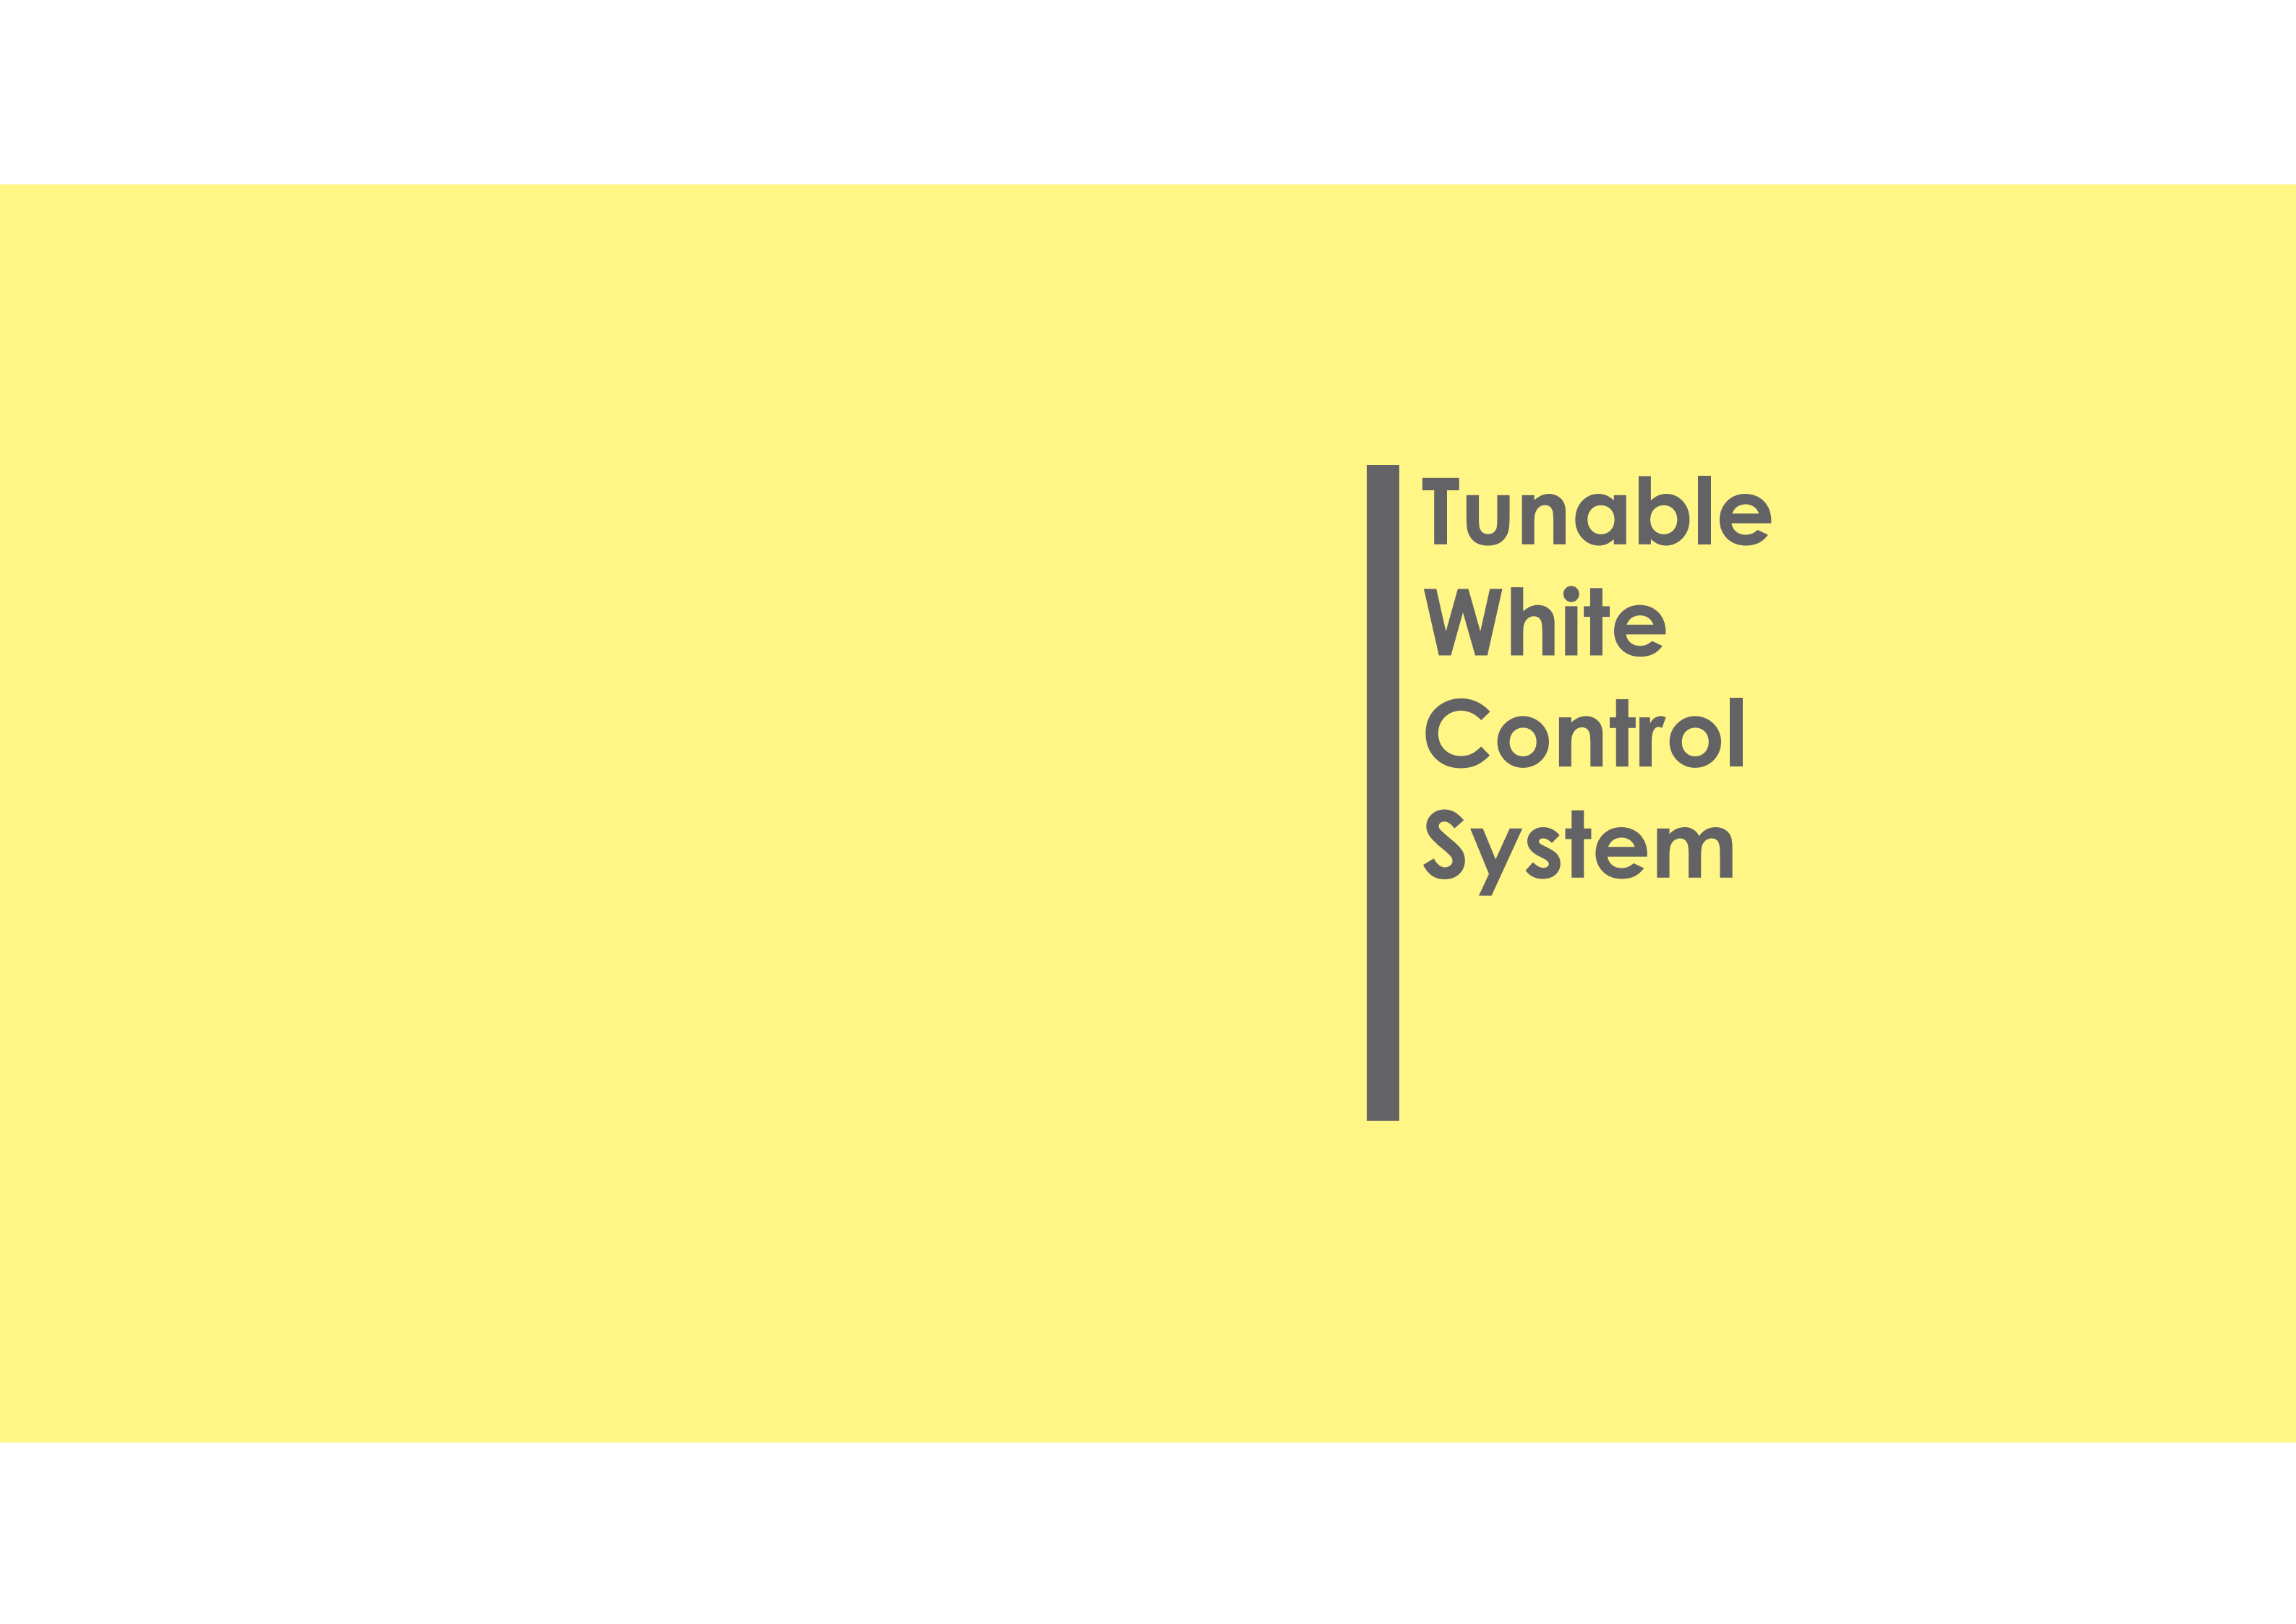
A solid yellow background with a dark grey vertical bar on the right side. The text 'Tunable White Control System' is positioned to the right of the bar.

# **Tunable White Control System**



# LUTRON®

LUTRON, a global organisation that is committed to delivering value to its customers. An innovative lighting controls for homes and commercial spaces of every type and style.

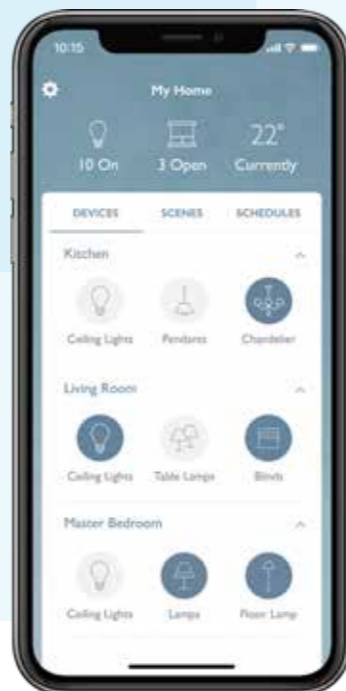

**Control:** Wireless Control / 1 Channel / 2 Channel

**Key Features:**

**Light Control** - Create just the right light for any activity or set moods in specific areas of your home – all at the touch of a button.

**Blind Control** - Use the sun to your advantage with automated blinds. Convert harsh glare into soft, pleasing light, while preserving your view.

**Temperature Control** - Adjust heating or cooling systems any time of day, even while you're away from home.

**Audio Control** - Fill a room with great sounding music.

**Keypad:**



Palladiom™



SeeTouch™



Pico



# CASAMBI

A clear leader in modern wireless lighting control solutions based on Bluetooth Low Energy. Key aspects of the Casambi solution are great user experience, high performance and scalability.



**Installation:** Wireless

**Key Features:**

**Light Control by Bluetooth** - Provides a mesh network where all the intelligence of the system is replicated in every node and, in such a way, creates a system with no single points of failure.

**Minimal Costs** - Works with any manufacturer's range of existing luminaires, creating an optimal solution in terms of ease of installation and functionality with minimal additional hardware and deployment costs.

**User Interfaces** - Casambi offers a big variety of possibilities for a user to interact with the lighting such as smartphones, tablets and smartwatches.

Keypad:



Xpress



# Tunable White Lighting Product

Decorative | Architectural




**DECORATIVE**




# Ginkgo

## Ginkgo



S40 (SMALL)



S50 (LARGE)

### E27 Pendant Lamp


E27 / 220-240V	
Small	Large
740316 ◊	740326 ◊

◊ Matt Brown / Matt Pink / Matt Blue

\*more colours on request



Pluma



E27 Floor Lamp

E27 / 220-240V

P-2959 ☐

☐ 64 (Black) / 27 (White)



Pluma









Saya


Saya

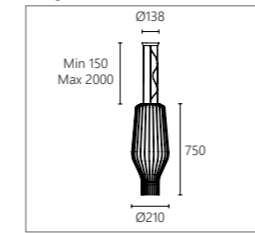

Ø31

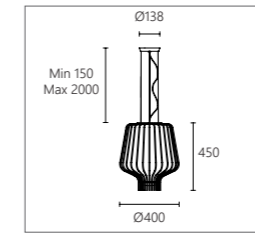

Ø40

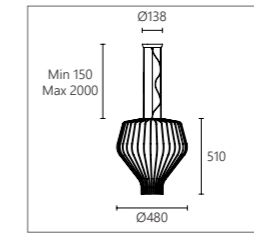

Ø48

E27 Pendant Lamp


E27 / 220-240V		
Ø31	Transparent	White
	F47 A Ø00	F47 A Ø01
Ø40	Transparent	White
	F47 A Ø00	F47 A Ø01
Ø48	Transparent	White
	F47 A Ø00	F47 A Ø01
Ø 17 (Burnished metal structure) / 19 (Chrome-plated metal structure) / 25 (Gold-plated metal structure) Ø 09 (Burnished metal structure) / 11 (Chrome-plated metal structure) / 21 (Gold-plated metal structure) Ø 13 (Burnished metal structure) / 15 (Chrome-plated metal structure) / 23 (Gold-plated metal structure)		





# Diabolo

## Diabolo

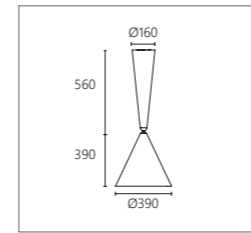

## E27 Pendant Lamp

E27 / 220-240V

F21210


Ø 09 (White) / 26 (Beaver Brown) / 35 (Cherry Red)






# Spun

## Spun

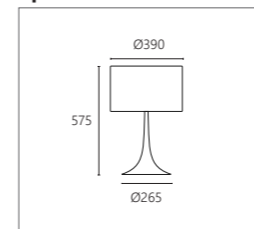

SMALL

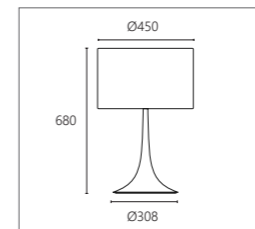

LARGE


### E27 Table Lamp

E27 / 220-240V	
1 (Small)	2 (Large)
F66100 ◊	F66110 ◊
◊ 09 (White) / 30 (Black)	





## Side by side




## E14 wall lamp

E14 / 220-240V						
Colour	Satin Brass	Matt Black	Matt White	Matt Nickel	Chrome	Bronze
	14240 01◊	14240 10◊	14240 14◊	14240 16◊	14240 02◊	14240 05◊
shade	◊* 301 (White) / 310 (Crème) / 377 (Brown)					

*\*more colours and shades on request*



# Side by side


**Sunrise**

**E27 Table Lamp**

3 x E27 / 220-240V						
Colour	Satin Brass	Matt Black	Matt White	Matt Nickel	Chrome	Bronze
	12740 01	12740 10	12740 14	12740 16	12740 02	12740 05
shade	☐* 301 (White) / 310 (Crème) / 377 (Brown)					


*\*more colours and shades on request*



# Sunrise



Jim

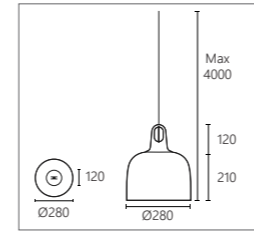


E27 Pendant Lamp

		E27 / 220-240V			
Hook	Outer diffuser / Outer layer	Matte White	Matte Black	Matte Champagne	Coppery Bronze
	Grey	1692 Ø 2300	1692 Ø 2800	1692 Ø 2700	1692 Ø 2400
	Honey	1692 Ø 6300	1692 Ø 6600	1692 Ø 6500	1692 Ø 6400
	Turquoise	1692 Ø 8200	1692 Ø 8500	1692 Ø 8400	1692 Ø 8300
Ø 1 (Bell) / 2 (Cone) / 3 (Cylinder) / 4 (Dome)					




VIBIA

Balance

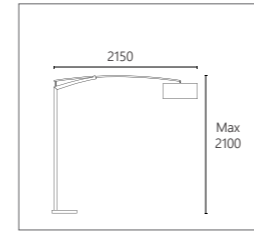


SMALL

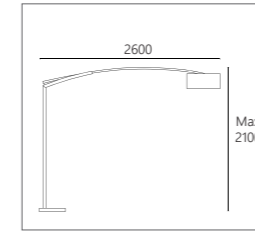

LARGE

E27 Floor Lamp

E27 Floor Lamp		
3 x E27 / 220-240V		
Cotton finish diffuser	Small	Large
	5191 $\varnothing$	5190 $\varnothing$
$\varnothing$ 01 (Chrome) / 30 (Nickel)		
Aluminum weft diffuser	5192 $\varnothing$	5189 $\varnothing$
	$\varnothing$ 01 (Chrome) / 18 (Graphite) / 30 (Nickel)	

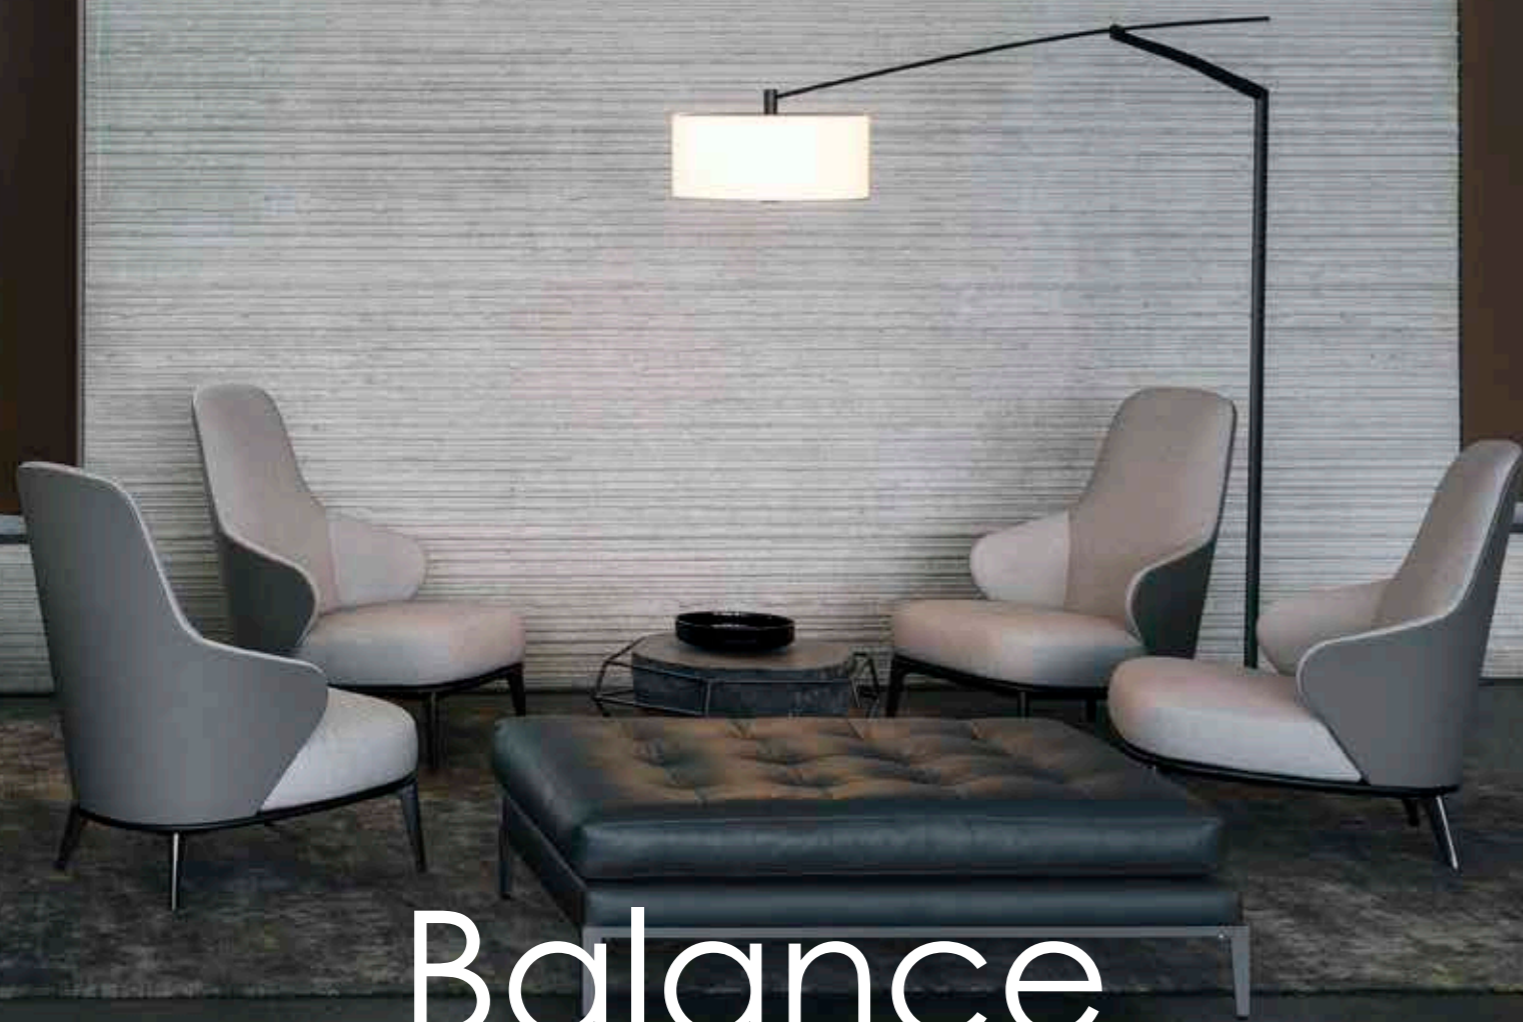

Balance




VIBIA




Jazz

**Jazz**

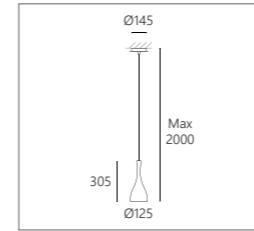

**SMALL**

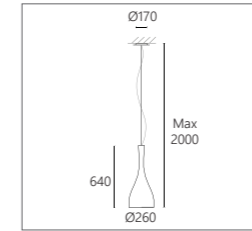

**LARGE**


**E27 Pendant Lamp**

E27 / 220-240V	
Small	Large
1338 $\varnothing$	1336 $\varnothing$
$\varnothing$ 10 (White) / 45 (Blue) / 25 (Beige)	






AICCI

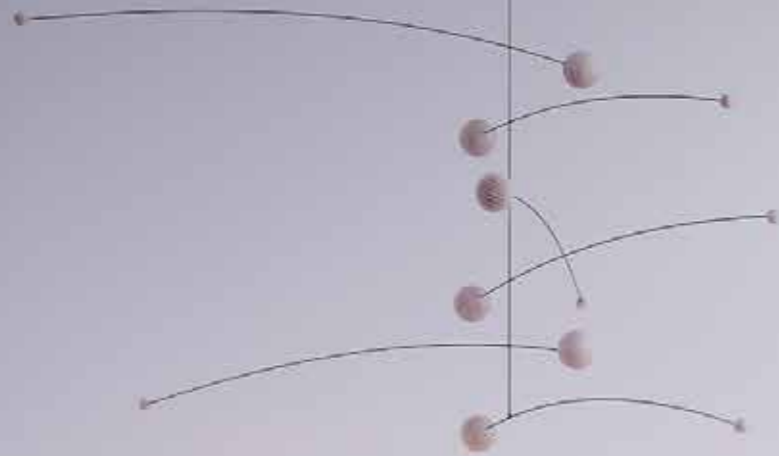


# T1 Side Table


## T1 Side Table

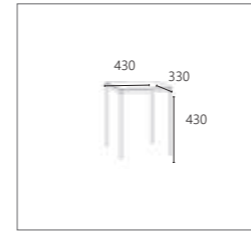


XS




S



M



L




XL

### Luminous table

Casambi / 220-240V

Aicci T1 Table

⌀ XS / S / M / L / XL

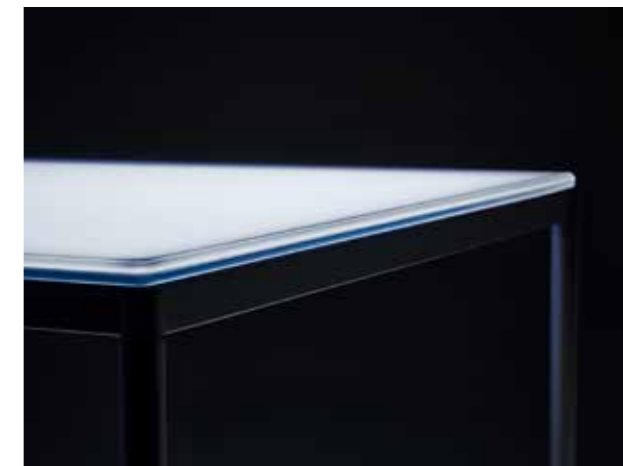

# ARCHITECTURAL





DELTA LIGHT®

# Entero Collection






ENTERO ROUND SMALL TRIMLESS IP




ENTERO SQUARE SMALL TRIMLESS IP

Entero Small Trimless

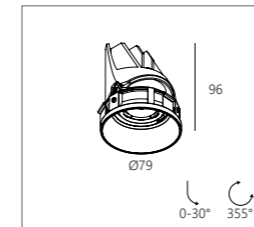

ROUND  
ØKIT

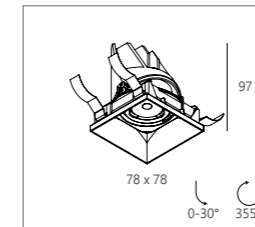


SQUARE  
KIT


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28464 9020 ◊	28464 9030 ◊	28427 9020 ◊	28427 9030 ◊
Square	28564 9020 ◊	28564 9030 ◊	28527 9020 ◊	28527 9030 ◊

◊ B (Black) / GC (Gold Colour) / W (White)  
Driver : DH  
Compulsory : IA (Round) / IB (Square)  
Accessories : i


Entero Small Trimless Wallwash

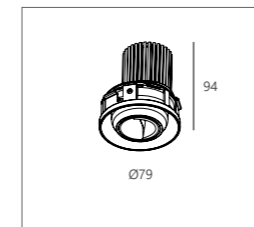

ROUND WALLWASH  
ØKIT

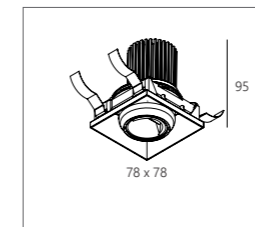


SQUARE WALLWASH  
KIT

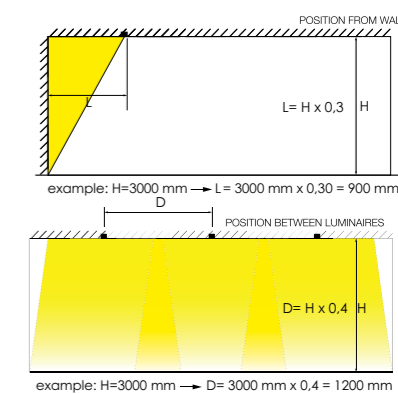


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
Round	28465 9000 ◊		28466 9000 ◊	
Square	28565 9000 ◊		28566 9000 ◊	

◊ B (Black) / GC (Gold Colour) / W (White)  
Driver : DH  
Compulsory : IA (Round) / IB (Square)

Entero Small Trimless IP

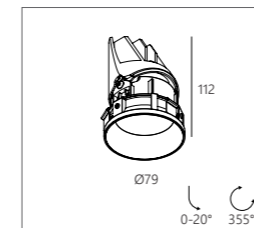

ROUND IP  
ØKIT

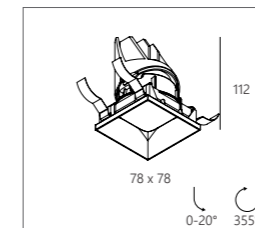


SQUARE IP  
KIT


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28472 9020 ◊	28472 9030 ◊	28452 9020 ◊	28452 9030 ◊
Square	28572 9020 ◊	28572 9030 ◊	28552 9020 ◊	28552 9030 ◊

◊ B (Black) / GC (Gold Colour) / W (White)  
IP44  
Driver : DH  
Compulsory : IA (Round) / IB (Square)

Entero Small

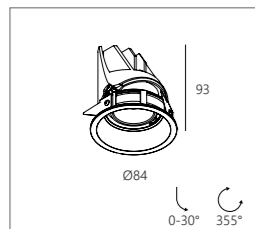

**ROUND**  
Ø76

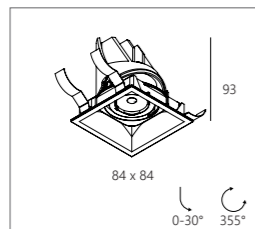

**SQUARE**  
76 x 76


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28456 9020 ◊	28456 9030 ◊	28404 9020 ◊	28404 9030 ◊
Square	28556 9020 ◊	28556 9030 ◊	28504 9020 ◊	28504 9030 ◊

◊ B (Black) / GC (Gold Colour) / W (White)


Driver : DH

Accessories : i

Entero Small IP

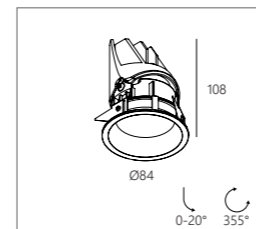

**ROUND IP**  
Ø76

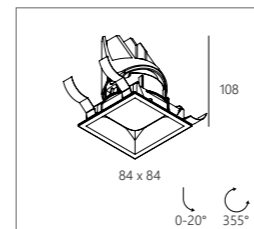

**SQUARE IP**  
76 x 76


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28459 9020 ◊	28459 9030 ◊	28408 9020 ◊	28408 9030 ◊
Square	28559 9020 ◊	28559 9030 ◊	28508 9020 ◊	28508 9030 ◊

◊ B (Black) / GC (Gold Colour) / W (White)


IP44

Driver : DH


Entero Small Wallwash

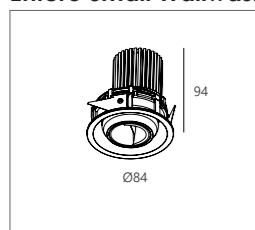

**ROUND WALLWASH**  
Ø76

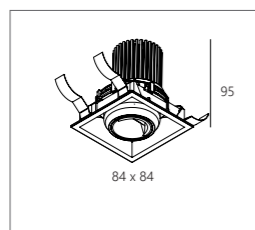

**SQUARE WALLWASH**  
76 x 76

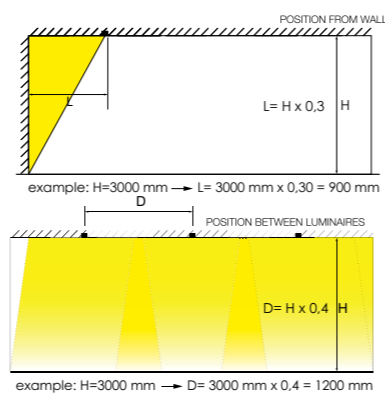


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
Round	28457 9000 ◊		28458 9000 ◊	
Square	28557 9000 ◊		28558 9000 ◊	


◊ B (Black) / GC (Gold Colour) / W (White)

Driver : DH

Entero Small X

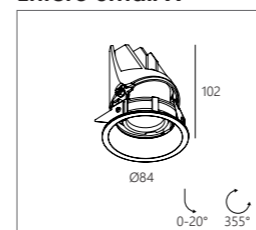

**ROUND**  
Ø76

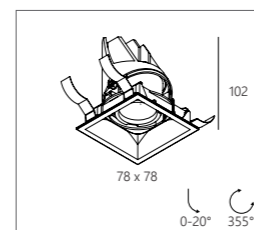

**SQUARE**  
76 x 76

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28470 9020 ◊	28470 9030 ◊	28441 9020 ◊	28441 9030 ◊
Square	28570 9020 ◊	28570 9030 ◊	28541 9020 ◊	28541 9030 ◊

◊ B (Black) / W (White)

IP65

Driver : DH

Accessories : i






ENTERO ROUND MEDIUM WALLWASH




ENTERO SQUARE MEDIUM WALLWASH

Entero Medium Trimless

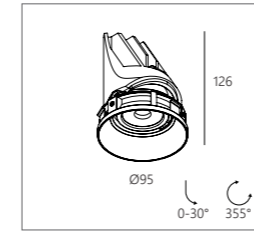

ROUND  
ØKIT

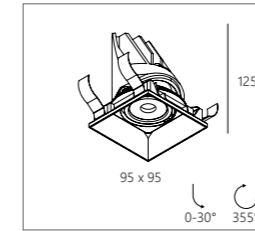


SQUARE  
KIT


1800-4000K / CRI 90			2700-6500K / CRI 90			
9W / 979lm / 500mA			9W / 1087lm / 500mA			
	18°	30°	45°	18°	30°	45°
Round	28467 9010 ◊	28467 9020 ◊	28467 9030 ◊	28432 9010 ◊	28432 9020 ◊	28432 9030 ◊
Square	28467 9030 ◊	28567 9020 ◊	28567 9030 ◊	28532 9010 ◊	28532 9020 ◊	28532 9030 ◊

◊ B (Black) / GC (Gold Colour) / W (White)  
Driver : DH  
Compulsory : IC (Round) / ID (Square)  
Accessories : ii


Entero Medium Trimless Wallwash

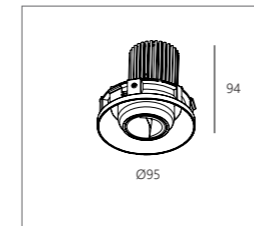

ROUND WALLWASH  
ØKIT

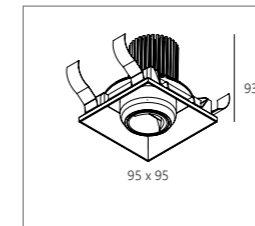


SQUARE WALLWASH  
KIT

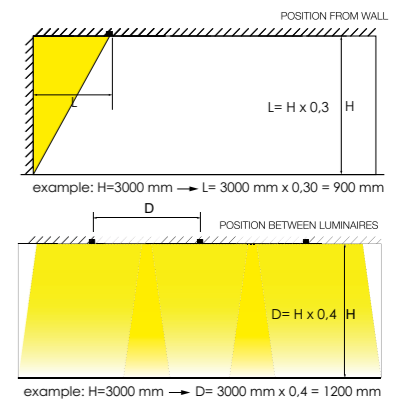


1800-4000K / CRI 90		2700-6500K / CRI 90		
9W / 979lm / 500mA		9W / 1087lm / 500mA		
	Round	Square	Round	Square
	28468 9000 ◊	28568 9000 ◊	28469 9000 ◊	28569 9000 ◊

◊ B (Black) / GC (Gold Colour) / W (White)  
Driver : DH  
Compulsory : IC (Round) / ID (Square)

Entero Medium Trimless IP

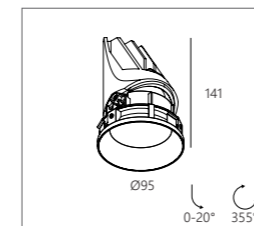

ROUND IP  
ØKIT

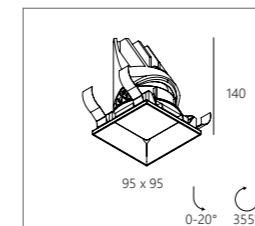


SQUARE IP  
KIT

1800-4000K / CRI 90			2700-6500K / CRI 90		
9W / 979lm / 500mA			9W / 1087lm / 500mA		
	18°	30°	18°	30°	
Round	28473 9010 ◊	28473 9020 ◊	28455 9010 ◊	28455 9020 ◊	
Square	28573 9010 ◊	28573 9020 ◊	28555 9010 ◊	28555 9020 ◊	


◊ B (Black) / GC (Gold Colour) / W (White)  
IP44  
Driver : DH  
Compulsory : IC (Round) / ID (Square)



Entero Medium

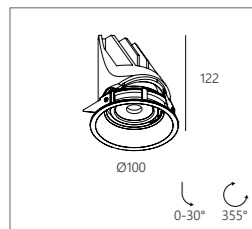

**ROUND**  
Ø92

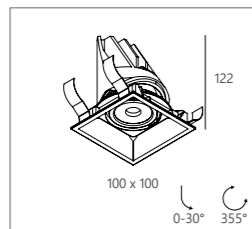

**SQUARE**  
92 x 92


	1800-4000K / CRI 90			2700-6500K / CRI 90		
	9W / 979lm / 500mA			9W / 1087lm / 500mA		
	18°	30°	45°	18°	30°	45°
Round	28460 9010 ◊	28460 9020 ◊	28460 9030 ◊	28412 9010 ◊	28412 9020 ◊	28412 9030 ◊
Square	28560 9010 ◊	28560 9020 ◊	28560 9030 ◊	28512 9010 ◊	28512 9020 ◊	28512 9030 ◊

◊ B (Black) / GC (Gold Colour) / W (White)


Driver : DH

Accessories : ii

Entero Medium IP

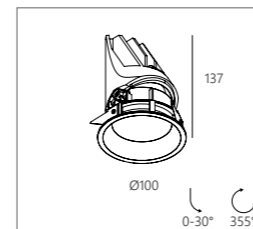

**ROUND IP**  
Ø92

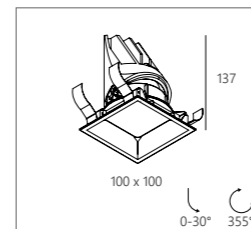

**SQUARE IP**  
92 x 92


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	18°	30°	18°	30°
Round	28463 9010 ◊	28463 9020 ◊	28416 9010 ◊	28416 9020 ◊
Square	28563 9010 ◊	28563 9020 ◊	28516 9010 ◊	28516 9020 ◊

◊ B (Black) / GC (Gold Colour) / W (White)


IP44

Driver : DH


Entero Medium Wallwash

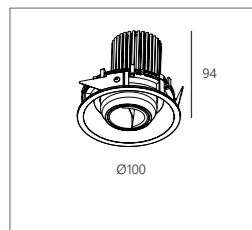

**ROUND WALLWASH**  
Ø92

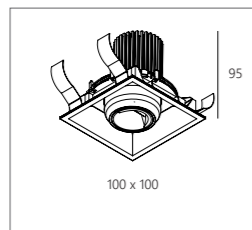

**SQUARE WALLWASH**  
92 x 92

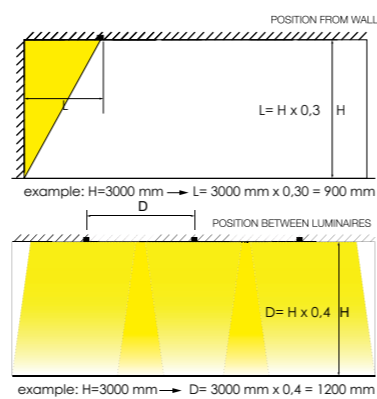


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	18°	30°	18°	30°
Round	28461 9000 ◊		28462 9000 ◊	
Square	28561 9000 ◊		28562 9000 ◊	


◊ B (Black) / GC (Gold Colour) / W (White)

Driver : DH

Entero Medium X

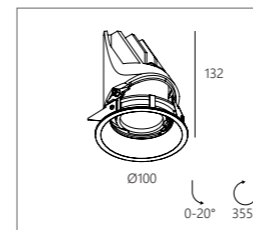

**ROUND**  
Ø92

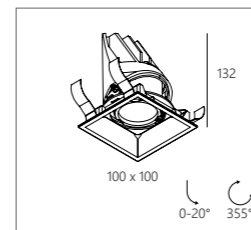

**SQUARE**  
92 x 92

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	18°	30°	18°	30°
Round	28471 9010 ◊	28471 9020 ◊	28445 9010 ◊	28445 9020 ◊
Square	28571 9010 ◊	28571 9020 ◊	28545 9010 ◊	28545 9020 ◊

◊ B (Black) / W (White)


IP65

Driver : DH

Accessories : ii




ENTERO ROUND LARGE

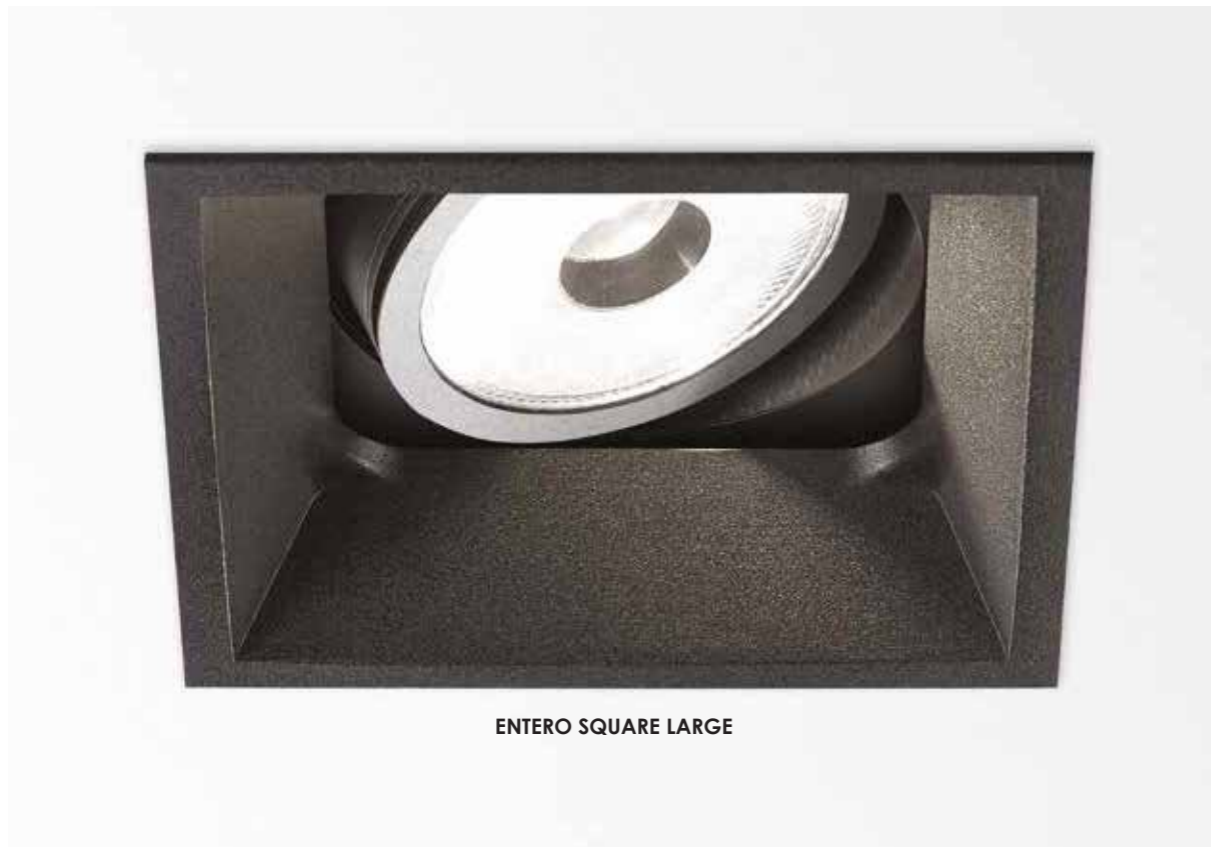


ENTERO SQUARE LARGE

Entero Large Trimless

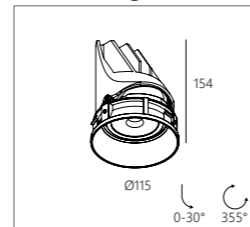


**ROUND**  
ØKIT

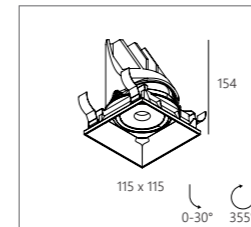


**SQUARE**  
KIT

	2700-6500K / CRI 90		
	17.8W / 2054lm / 500mA		
	18°	30°	45°
Round	28437 9010 ◊	28437 9020 ◊	28437 9030 ◊
Square	28537 9010 ◊	28537 9020 ◊	28537 9030 ◊
	◊ B (Black) / GC (Gold Colour) / W (White)		
	Driver : DH		
	Compulsory : IE (Round) / IF (Square)		
	Accessories : iii		

Entero Large

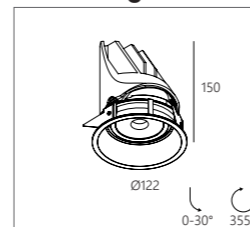

**ROUND**  
Ø112

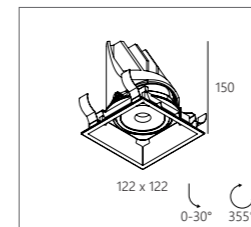


**SQUARE**  
112 x 112


	2700-6500K / CRI 90		
	17.8W / 2054lm / 500mA		
	18°	30°	45°
Round	28420 9010 ◊	28420 9020 ◊	28420 9030 ◊
Square	28520 9010 ◊	28520 9020 ◊	28520 9030 ◊
	◊ B (Black) / GC (Gold Colour) / W (White)		
	Driver : DH		
	Accessories : iii		



**Entero Large IP**

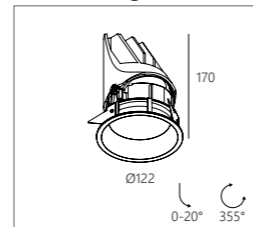


**ROUND IP**  
Ø112

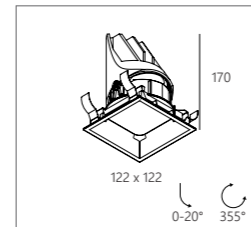


**SQUARE IP**  
112 x 112

	2700-6500K / CRI 90	
	17.8W / 2054lm / 500mA	
	18°	30°
Round	28423 9010 ◊	28423 9020 ◊
Square	28523 9010 ◊	28523 9020 ◊
	◊ B (Black) / GC (Gold Colour) / W (White)	
	IP44	
	Driver : DH	

**Entero Large X**

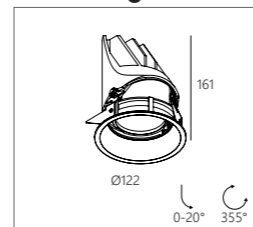

**ROUND**  
Ø112

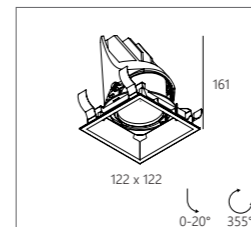

**SQUARE**  
112 x 112

	2700-6500K / CRI 90	
	17.8W / 2054lm / 500mA	
	18°	30°
Round	28449 9010 ◊	28449 9020 ◊
Square	28549 9010 ◊	28549 9020 ◊
	◊ B (Black) / W (White)	
	IP65	
	Driver : DH	
	Accessories : iii	




DELTA LIGHT®

SPY

Collection




**Spy 52 Trimless**

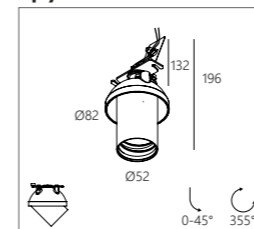

ØKIT

2700-6500K / CRI 90	
9W /1087lm / 500mA	
20°	45°
19813 9020 ◊	19813 9030 ◊
◊ B (Black) / W (White)	
Driver : DH	
Compulsory : IG, IH	
Accessories : iv	


**Spy 52 ST**

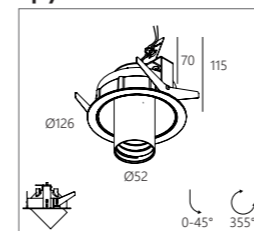

Ø98


2700-6500K / CRI 90	
9W /1087lm / 500mA	
20°	45°
19816 9020 ◊	19816 9030 ◊
◊ W-W (White-White)	
Driver : DH	
Compulsory : IH	
Accessories : iv	

**Spy 52 Clip**

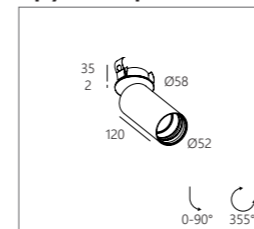


Ø50

**Spy 52 On**

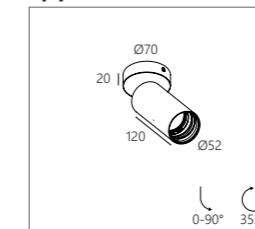


Spy 52 Clip		Spy 52 On	
2700-6500K / CRI 90			
9W /1087lm / 500mA			
20°	45°	20°	45°
19822 9020 ◊	19822 9030 ◊	19825 9020 ◊	19825 9030 ◊
◊ B-B (Black-Black) / W-W (White-White)		◊ B (Black) / W (White)	
Driver : DH			
Compulsory : IH			
Accessories : iv			

**Spy 66 Clip**

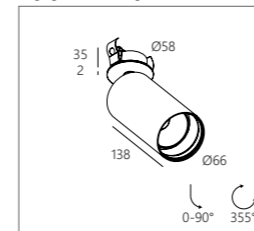


Ø50


**Spy 66 On**

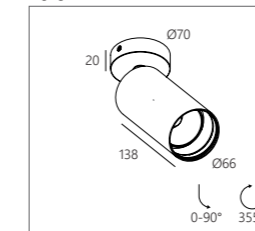


Spy 66 Clip		Spy 66 On			
2700-6500K / CRI 90					
9W /1087lm / 500mA					
18°	30°	45°	18°	30°	45°
24622 9010 ◊	24622 9020 ◊	24622 9030 ◊	24624 9010 ◊	24624 9020 ◊	24624 9030 ◊
◊ B-B (Black-Black) / W-W (White-White)			◊ B (Black) / W (White)		
Driver : DH					
Compulsory : II					
Accessories : v					

DELTA LIGHT®  
Multinova

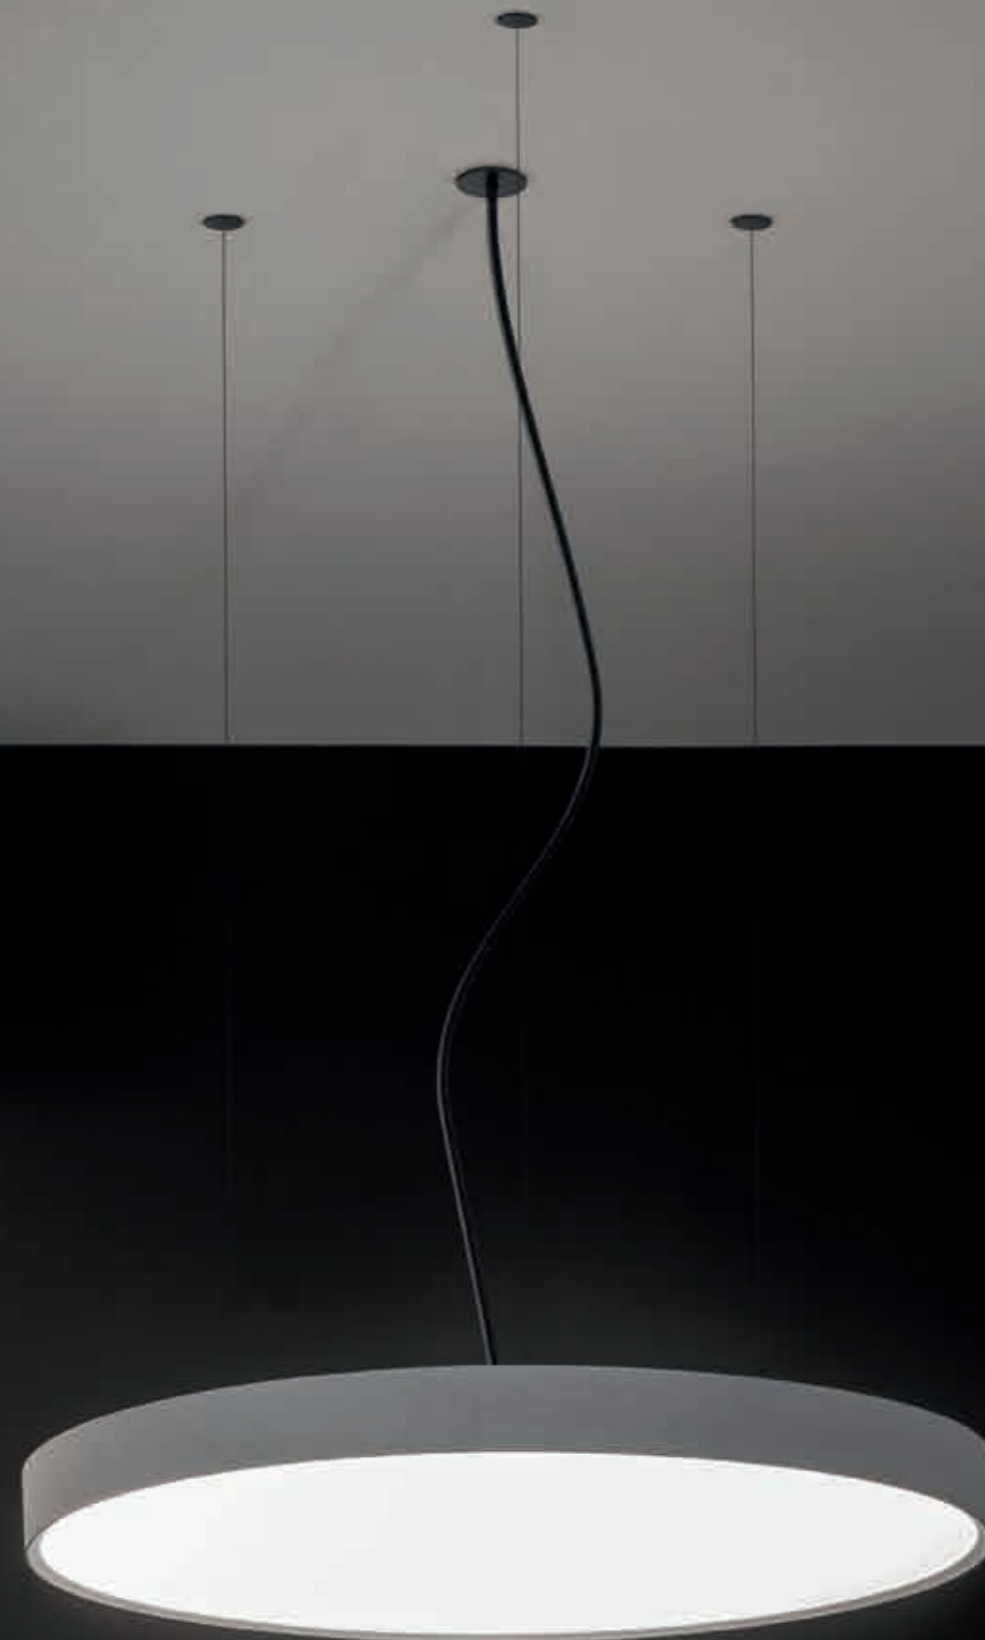

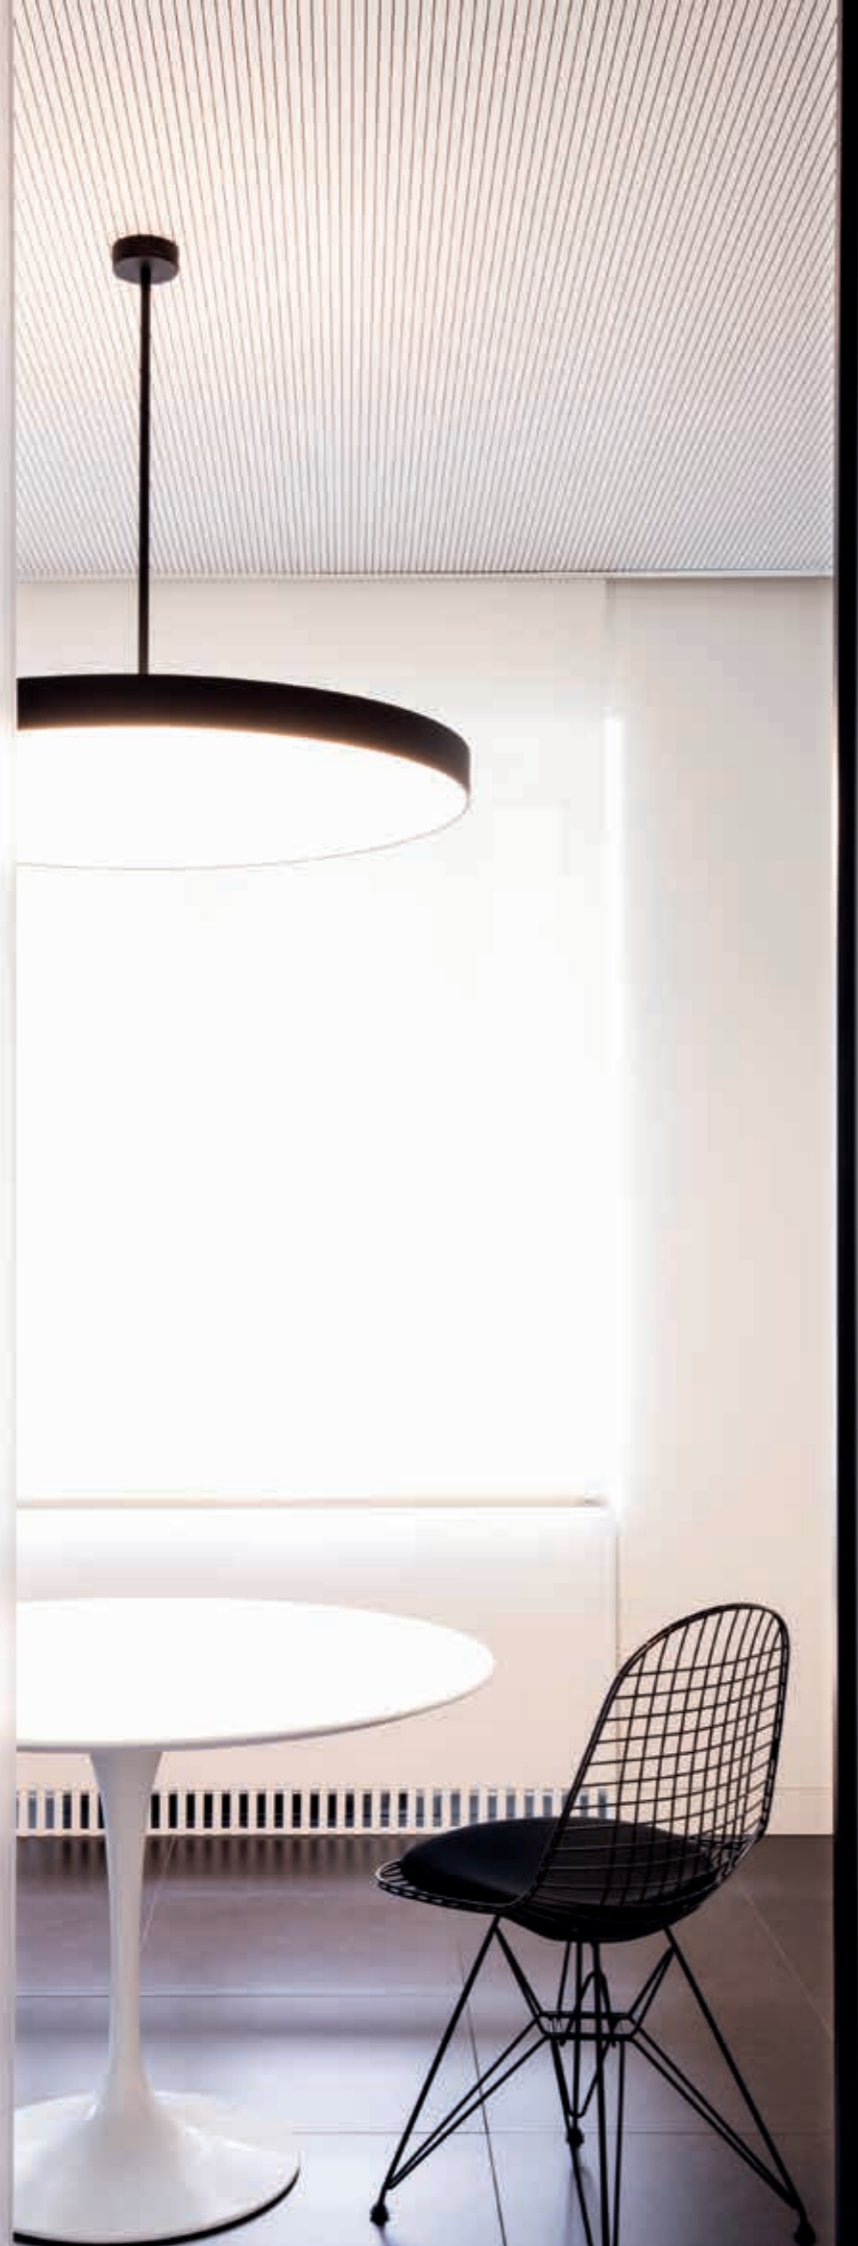


**Multinova 30**



2700-6500K / CRI 90		
9.4W / 1367lm / 220-240V		
SBL	DALI DIM	PRISMATIC
27914 9005 ◊	27915 9005 ◊	
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)	
Recessed / Suspended versions on request		


**Multinova 55**



2700-6500K / CRI 90		
31.5W / 4570lm / 220-240V		
SBL	DALI DIM	PRISMATIC
28014 9005 ◊	28015 9005 ◊	
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)	
Recessed / Suspended versions on request		




**Multinova 30 Down-Up**



2700-6500K / CRI 90	
UP - 2.8W / 406lm   DOWN - 9.3W / 1352lm / 220-240V	
SBL	PRISMATIC
DALI DIM	
27920 9005 ◊	27921 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)
Suspended versions on request	

**Multinova 55 Down-Up**




2700-6500K / CRI 90	
UP - 4.5W / 655lm   DOWN - 30.5W / 4422lm / 220-240V	
SBL	PRISMATIC
DALI DIM	
28020 9005 ◊	28021 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)
Suspended versions on request	






**Multinova 255**



2700-6500K / CRI 90	
2 X 31.5W / 4570lm / 220-240V	
SBL	PRISMATIC
DALI DIM	
28059 9005 ◊	28060 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)
Accessories : vii	

**Multinova 355**




2700-6500K / CRI 90	
3 X 31.5W / 4570lm / 220-240V	
SBL	PRISMATIC
DALI DIM	
28065 9005 ◊	28066 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)
Accessories : vii	






DELTA LIGHT®

# Magnet Track

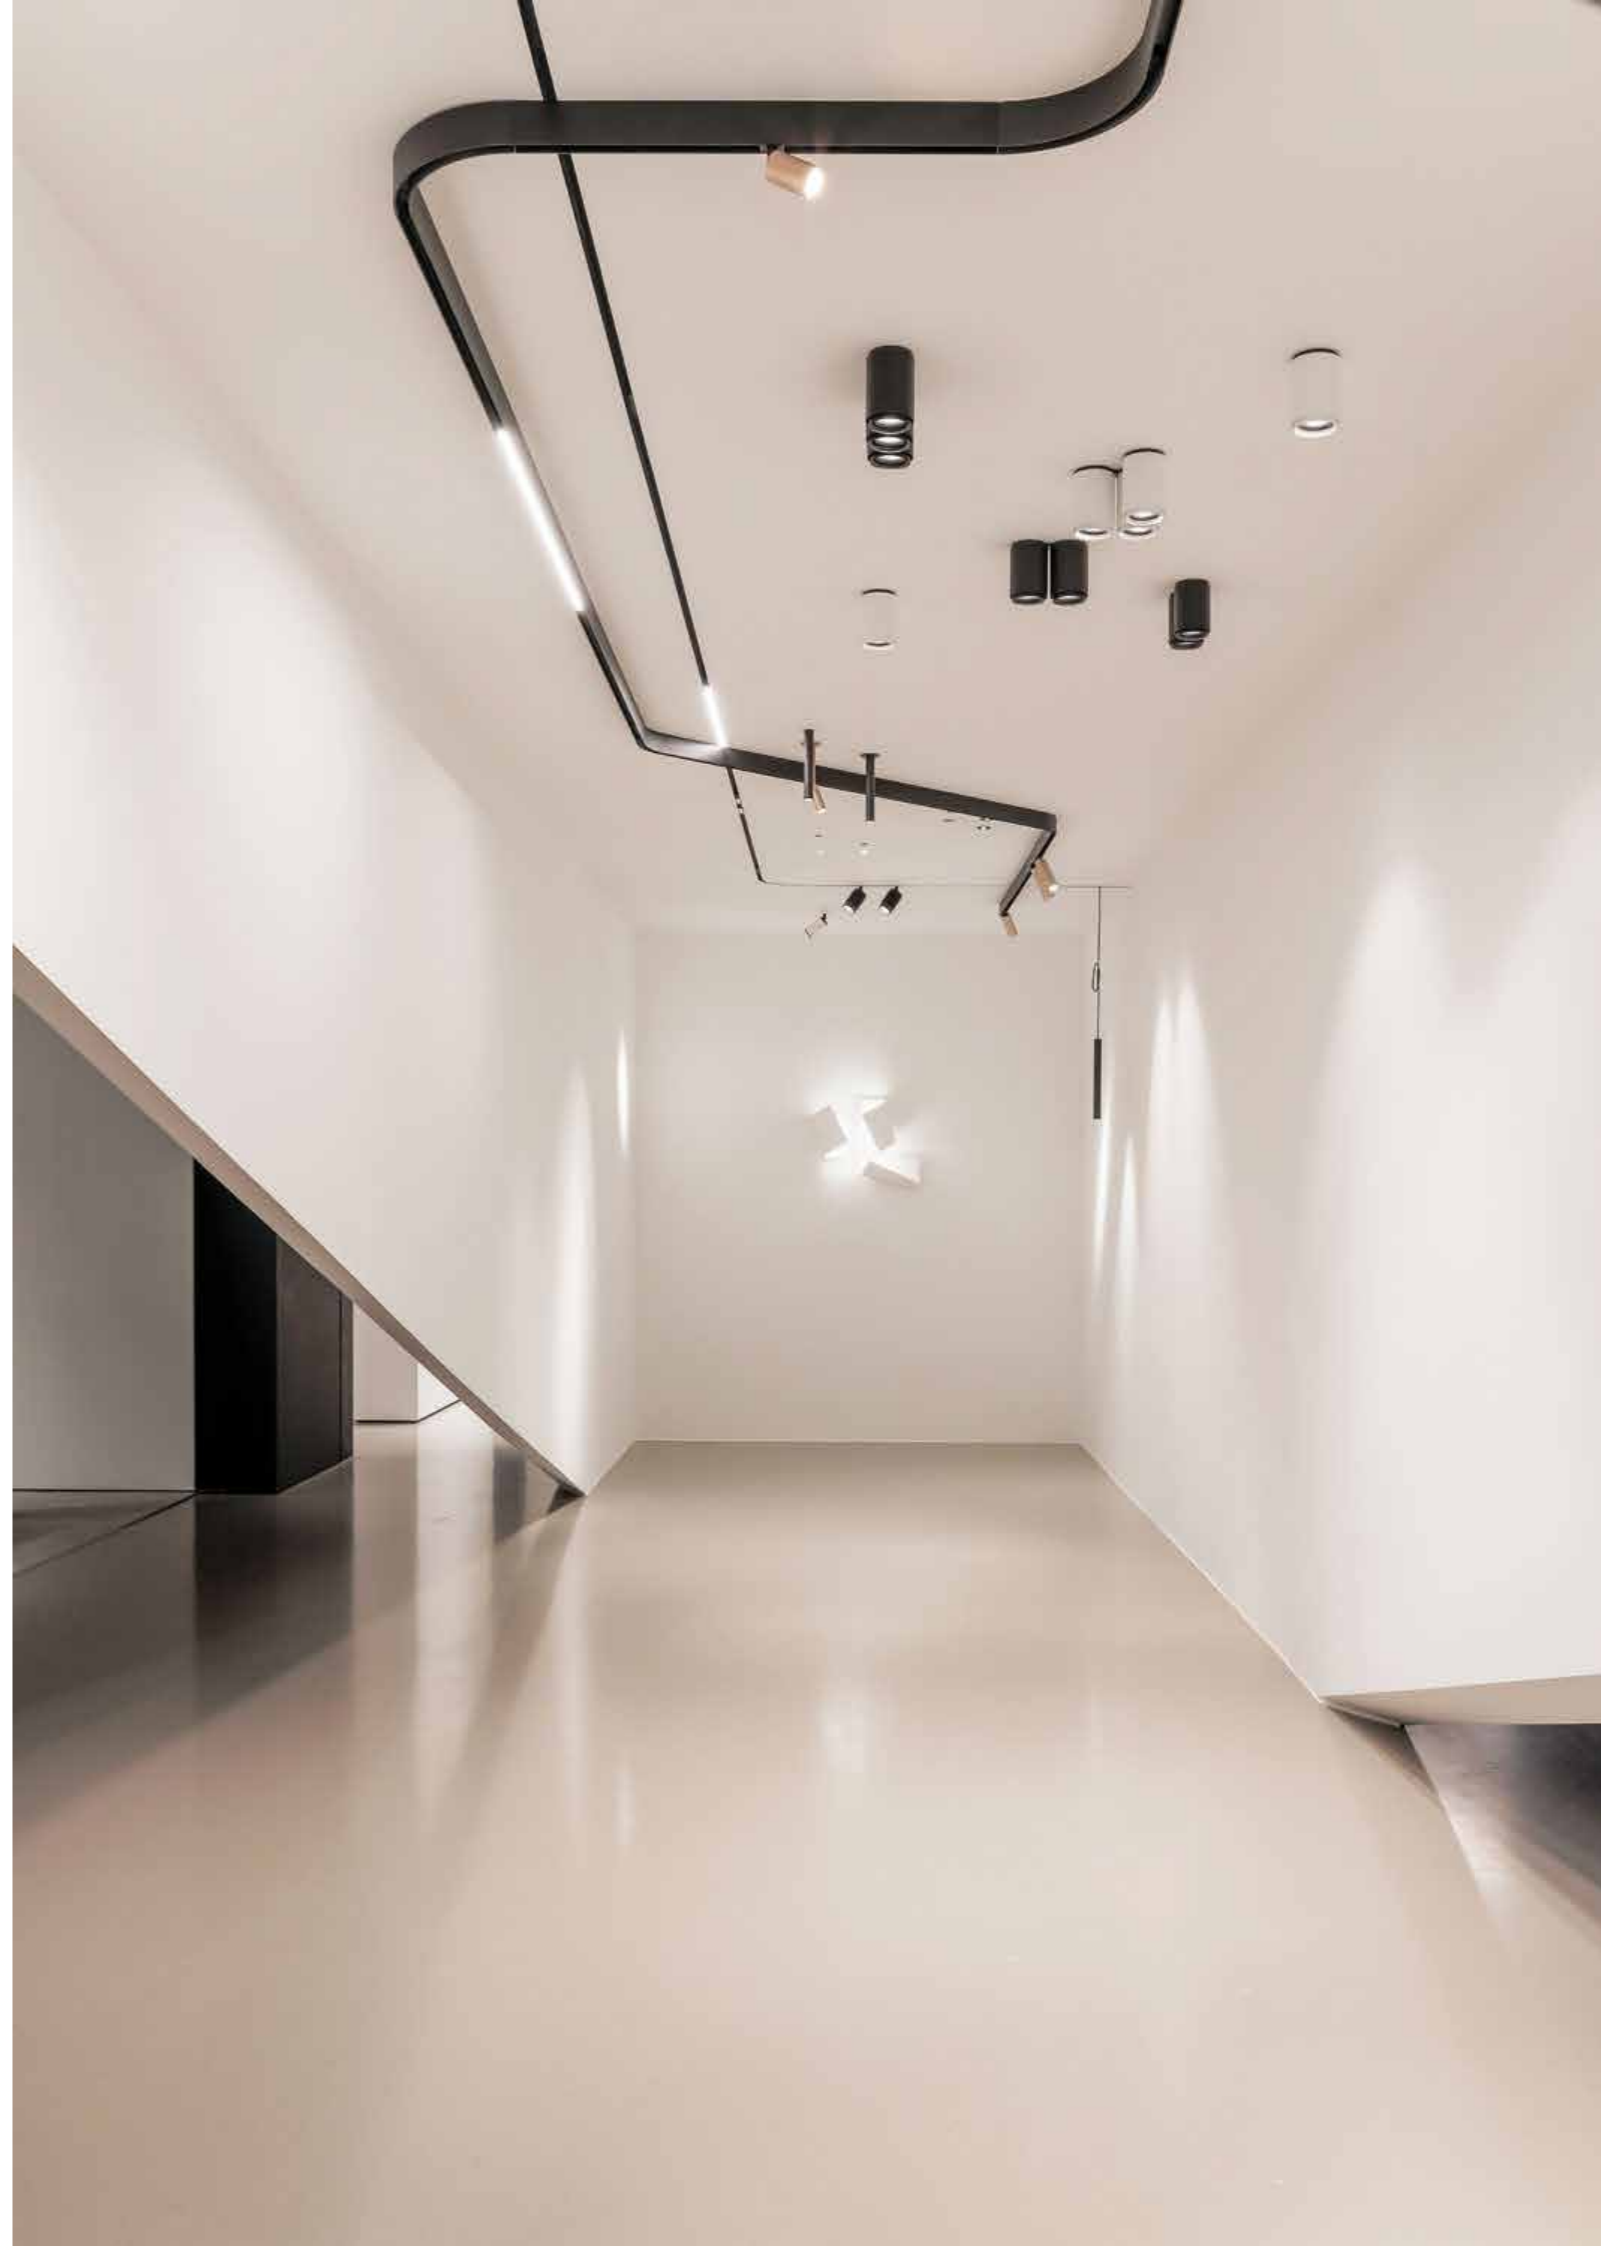




**A. Profile Construction**




**SPM20 - Profile**

Profile 1m	420 20 10 00 ◊
Profile 2m	402 20 20 00 ◊
Profile 3m	420 20 30 00 ◊
	◊ B (Black)

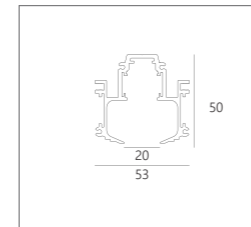


**SPM20 - Customised**

23301 0000 ◊
◊ B (Black)
Max. L / Profile: 3m 48V-DC (2 conductors) 2Dim conductors

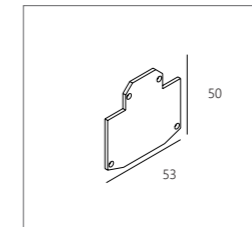


**SPM20 - END CAP**

420 20 03 01 ◊
◊ B (Black)




**SPM - Corner 180°**

420 06 01
Requirements profile connection

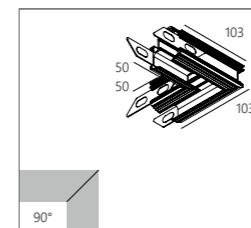


**SPM20 - Corner set 90°**

420 20 06 06
Requirements profile connection

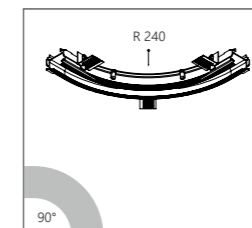



**SPM20 - Corner set R90°\***  
*\*No modules in Cornerset R*

23301 0690
INCL. connection cable

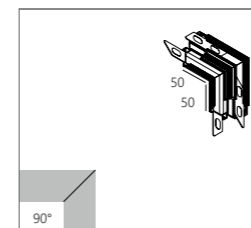


**SPM20 - Corner set V90°**

420 20 06 17
Requirements profile connection

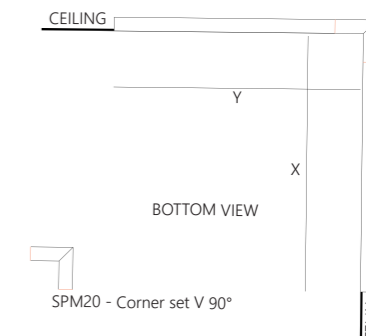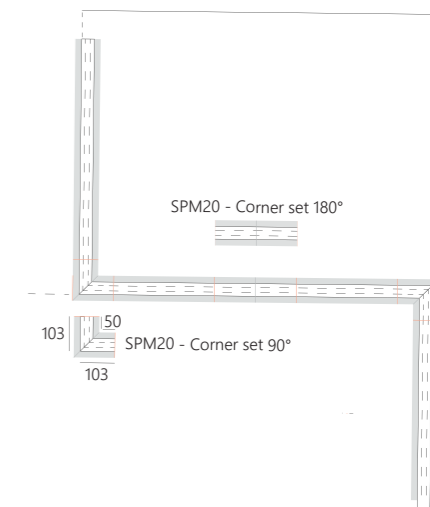

**B. Profile Fixation**




**SPM20 - Fixation set**

57 x (L + 5) x 85


420 20 14 01
Set of 2pcs

**C. Profile Connection**

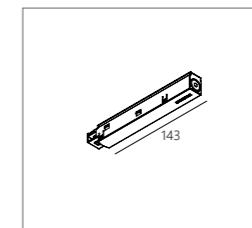


**SPM - Supply 48V**

420 99 03
48V-DC max. 200W / supply / max. 50m

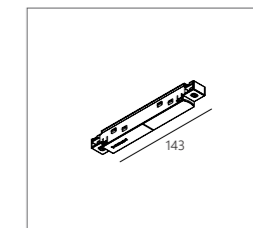


**SPM - connector 48V-180°**

420 99 01
48V-DC max. 200W / supply / max. 50m

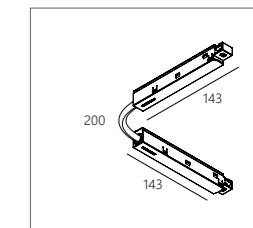


**SPM - connector 48V-0-180°**

420 99 02
48V-DC max. 200W / supply / max. 50m

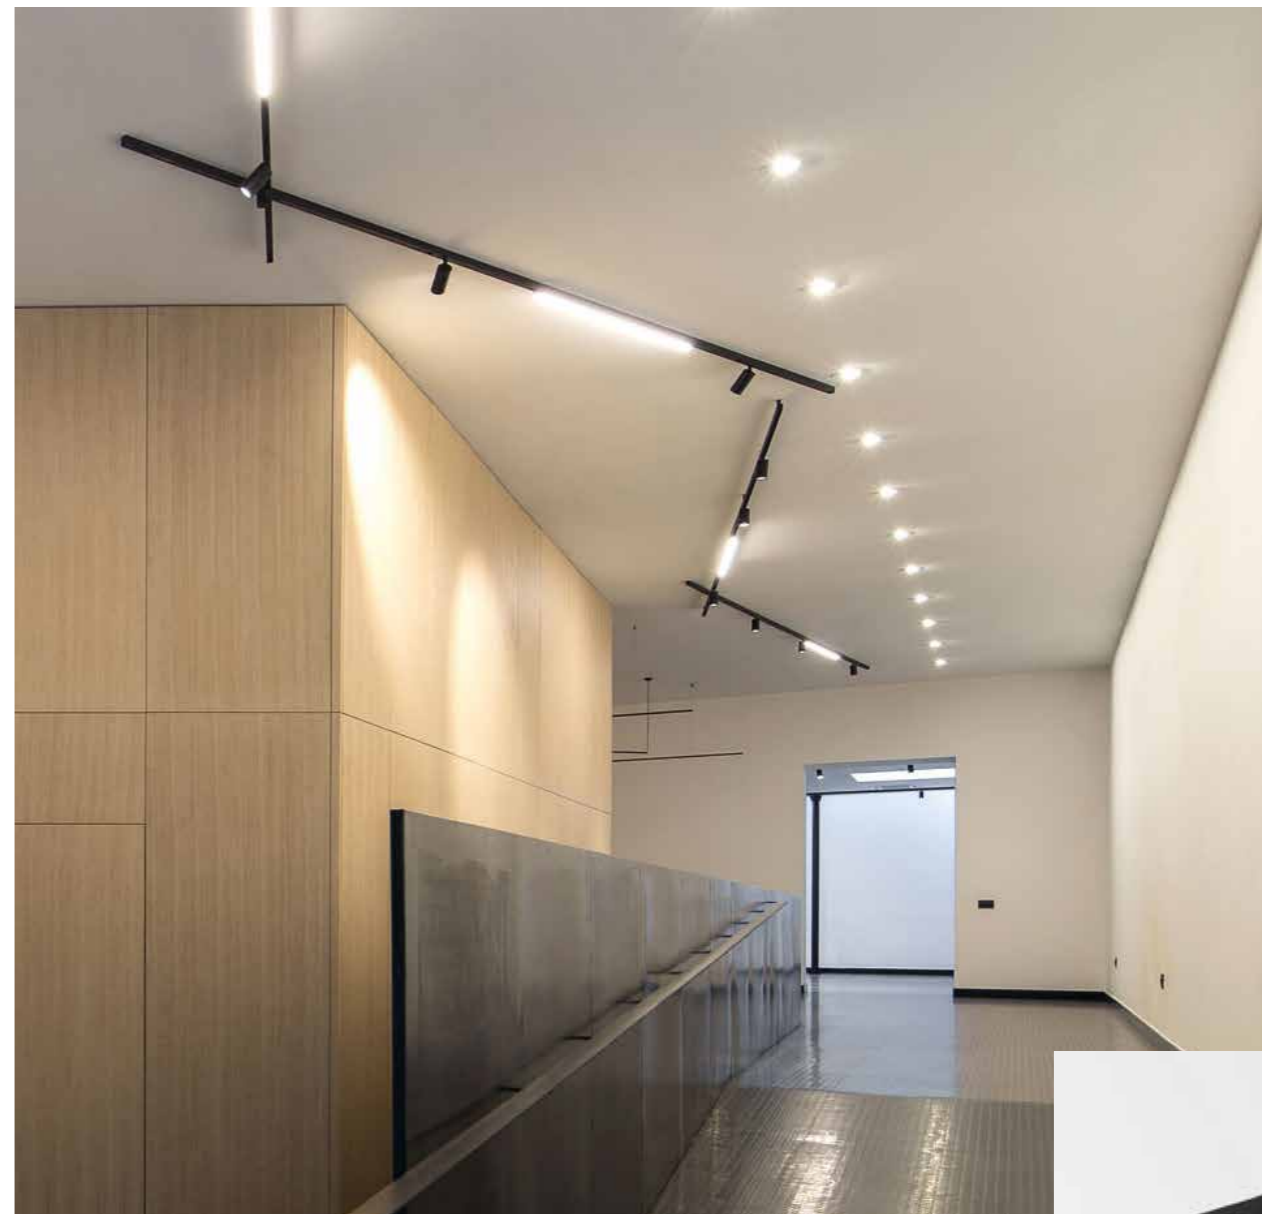

# Shiftline M26L

### A. Profile Construction

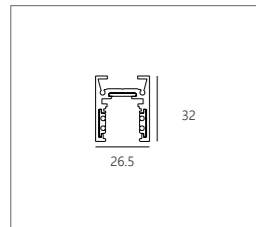

**SLM26L - Profile**

Profile 1m


23358 0010 ◊  
◊ B (Black) / W (White)

Profile 2m

23358 0020 ◊  
◊ PA (Polished Aluminium) / B (Black) / BRB (Black Bronze) / W (White)


Profile 3m

23358 0030 ◊  
◊ PA (Polished Aluminium) / B (Black) / BRB (Black Bronze) / W (White)  
48V-DC (2 Conductors)  
2 Dim Conductors

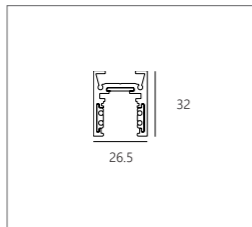


**SLM26L - Customised**

23358 0000 ◊  
◊ B (Black) / W (White)  
Max. L / Profile: 3m 48V-DC (2 conductors) 2 Dim conductors

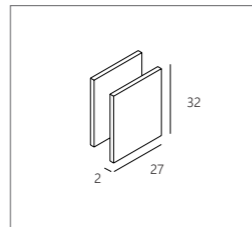


**SLM26L - END CAP SET**

23358 0320 ◊  
◊ B (Black) / W (White)  
Set of 2 pcs



**SLM26L - Corner set 180°**


23358 0620  
Requirements profile connection

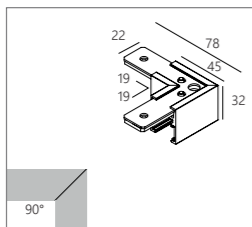

**SLM26L - Corner set 90°**


23358 9640 ◊  
◊ B (Black) / W (White)  
Requirements profile connection

### B. Profile Fixation




**SPM26L - Fixation set**

23358 1410  
Set of 2 pcs

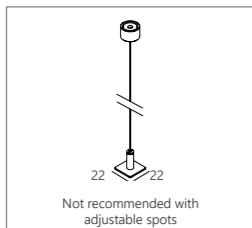


**SLM - Cable Suspension Single 1.6**

23359 0510  
L 1.6m  
Option Suspension ST  
>15225 0340 B (Black) / W (White)

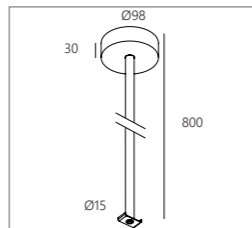

**SLM - ROD Suspension 0.8m + connection**

23358 1510 ◊  
◊ B (Black) / W (White)  
EXCL. Cabling

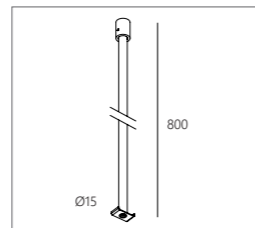

**SLM - ROD Suspension 0.8m**

23358 1520 ◊  
◊ B (Black) / W (White)




**SPM26L / M35R Mask**

23377 0030 ◊  
◊ B (Black)  
L 2m




### C. Profile Connection

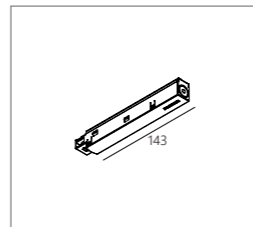


**SPM - Supply 48V**

420 99 03  
48V-DC max. 200W /  
supply / max. 50m

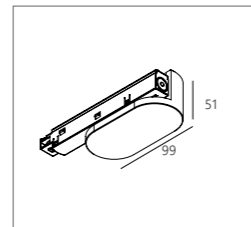


**SLM26L - Side Supply 48V**

23358 1540 ◊  
◊ B (Black)  
48V-DC max. 200W /  
supply / max. 50m

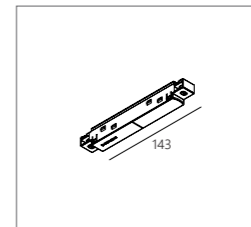


**SPM - connector 48V-180°**

420 99 01  
48V-DC max. 200W /  
supply / max. 50m

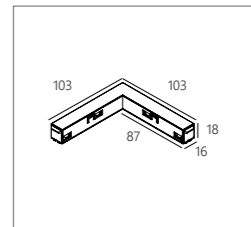

**SPM - connector 48V-90°**

23300 9920  
48V-DC max. 200W /  
supply / max. 50m

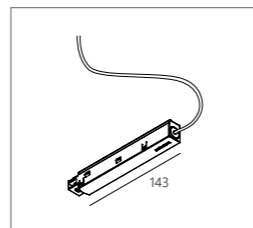


**Current Supply Set L1.6m Transparent**

23359 2120 -2 x 0.75mm<sup>2</sup>  
For MDL  
23359 2140 -4 x 0.75mm<sup>2</sup>  
For DALI Dim

**Current Supply Set L1.6m Black**


23359 2220 -2 x 0.75mm<sup>2</sup>  
For MDL  
23359 2240 -4 x 0.75mm<sup>2</sup>  
For DALI Dim

Options  
Connection ST >15225 0360 B (Black) / W (White)  
Cable Base R ◊>203 99 55 ANO (Anodised) / B (Black) / W (White)  
Cable Base S ◊>203 99 56 ANO (Anodised) / B (Black) / W (White)  
Coverset R62-90-100 / S 62-80-90

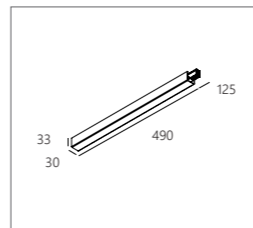


**SLM26L - Powerbox 48V/100W**

23377 0040 ◊  
◊ B (Black) / W (White)  
120-240V

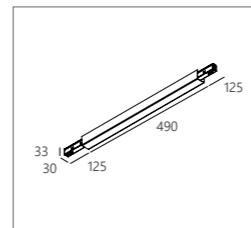


**SLM26L - Mid Powerbox 48V/10W**

23377 0050 ◊  
◊ B (Black) / W (White)  
120-240V

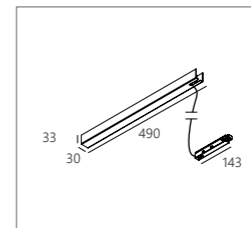

**SLM26L - C Powerbox 48V/100W**

23380 0060 ◊  
◊ B (Black) / W (White)  
120-240V  
INCL. CABLE 1.6m  
BLACK FOR BLACK BOX  
GREY FOR WHITE BOX

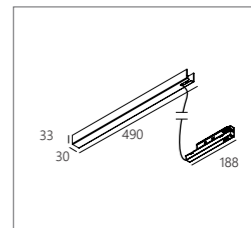

**SLM26L - C Powerbox 48V/100W**


23380 007W  
◊ B (Black) / W (White)  
120-240V  
INCL.SMART 48 MODULATOR WD  
INCL. CABLE 1.6m  
BLACK FOR BLACK BOX  
GREY FOR WHITE BOX



# Shiftline M35R




### A. Profile Construction

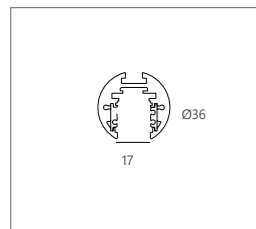


**SLM35R - Profile**

Profile 1m
23375 0010 ◊
◊ B (Black) / W (White)
Profile 2m
23375 0020 ◊
◊ B (Black) / W (White)
Profile 3m
23375 0030 ◊
◊ B (Black) / W (White)
48V-DC (2 Conductors)
2 Dim Conductors

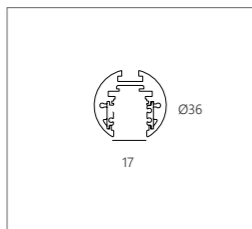


**SLM35R - Customised**

23375 0000 ◊
◊ B (Black) / W (White)
Max. L / Profile: 3m 48V-DC (2 conductors) 2 Dim conductors

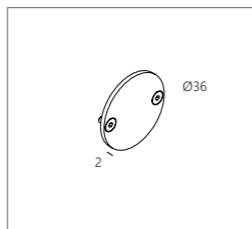

**SLM35R - END CAP**


23375 0300 ◊
◊ B (Black) / W (White)
Set of 2 pcs



**SLM35R - Corner set 180°**


23375 0620
Requirements profile connection

### B. Profile Fixation

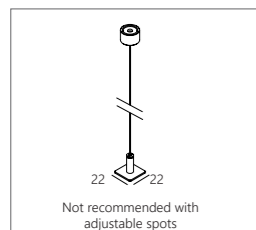


**SLM - Cable Suspension single 1.6**

23359 0510
L 1.6m
Option Suspension ST >15225 0340 Black / White

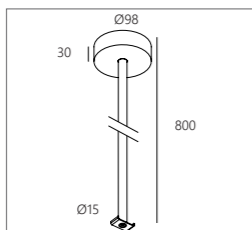

**SLM - ROD Suspension 0.8m + connection**

23358 1510 ◊
◊ B (Black) / W (White)
EXCL. Cabling

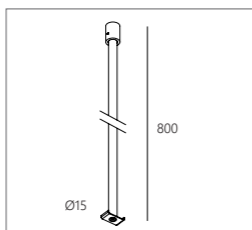

**SLM - ROD Suspension 0.8m**

23358 1520 ◊
◊ B (Black) / W (White)




**SPM26L / M35R Mask**

23377 0030 ◊
◊ B (Black)
L 2m




### C. Profile Connection

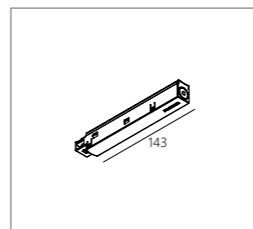


**SPM - Supply 48V**

420 99 03
48V-DC max. 200W / supply / max. 50m

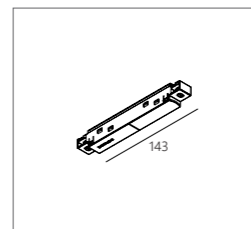

**SPM - connector 48V-180°**

420 99 01
48V-DC max. 200W / supply / max. 50m

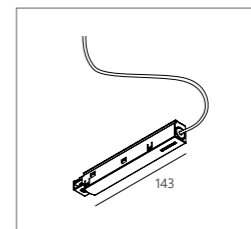


**Current Supply Set L1.6m Transparent**

23359 2120 -2 x 0.75mm <sup>2</sup>
For MDL
23359 2140 -4 x 0.75mm <sup>2</sup>
For DALI Dim

**Current Supply Set L1.6m Black**


23359 2220 -2 x 0.75mm <sup>2</sup>
For MDL
23359 2240 -4 x 0.75mm <sup>2</sup>
For DALI Dim

Options  
 Connection ST >15225 0360 B (Black) / W (White)  
 Cable Base R ◊>203 99 55 ANO (Anodised) / B (Black) / W (White)  
 Cable Base S ◊>203 99 56 ANO (Anodised) / B (Black) / W (White)  
 Coverset R62-90-100 / S 62-80-90

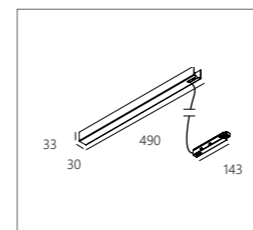

**SLM26 - C Powerbox 48V/100W**

23380 0060 ◊
◊ B (Black) / W (White)
120-240V / 50-60Hz
INCL. cable 1.6m
Black for black box
Grey for white box

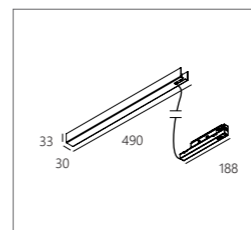


**SLM26 - C Powerbox 48V/100W WD**

23380 007W ◊
◊ B (Black) / W (White)
120-240V / 50-60Hz
INCL. smart 48 modulator WD
INCL. cable 1.6m
Black for black box
Grey for white box




**Spy 52**

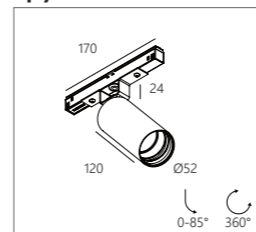


2700-6500K / CRI 90		
9W / 1087lm / 48V-DC		
20°	45°	
DALI DIM		
M20	23331 9025 ◊	23331 9035 ◊
M26L	23215 9025 ◊	23215 9035 ◊
M35R	23215 9025 ◊	23215 9035 ◊
◊ B (Black) / W (White)		
Compulsory : IH		
Accessories : iv		

**Spy 66**

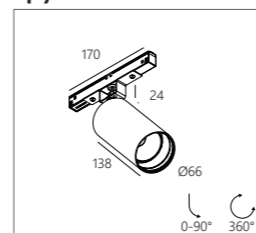

2700-6500K / CRI 90			
9W / 1087lm / 48V-DC			
18°	30°	45°	
DALI DIM			
M20	23360 9015 ◊	23360 9025 ◊	23360 9035 ◊
M26L	23292 9015 ◊	23292 9025 ◊	23292 9035 ◊
M35R	23292 9015 ◊	23292 9025 ◊	23292 9035 ◊
◊ B (Black) / W (White)			
Compulsory : II			
Accessories : v			

**Multinova 30**

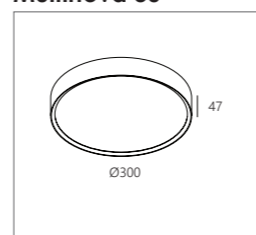

2700-6500K / CRI 90		
9.4W / 1367lm / 48V-DC		
SBL	PRISMATIC	
M20	27953 9005 ◊	27954 9005 ◊
M26L	27944 9005 ◊	27945 9005 ◊
M35R	27944 9005 ◊	27945 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)		◊ B (Black) / W (White)



DELTA LIGHT®


# 3-Phase Track






# Recessed

- COMPOSITION**  
 A. Track 3F Dim In  
 B. Endcap / Supply / Corners  
 C. Fixation  
 D. Accessories

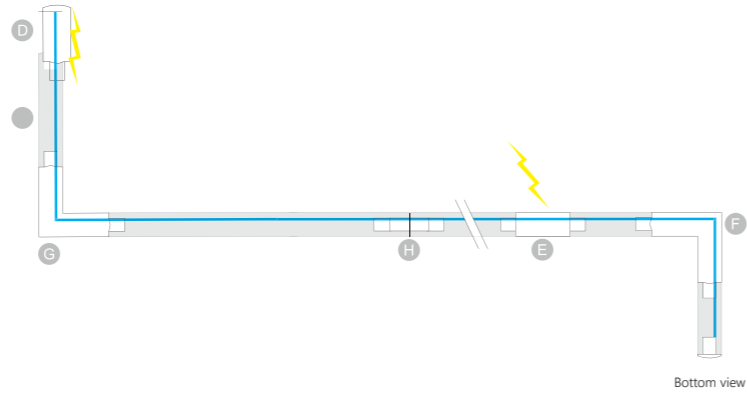


**C. Fixation.**

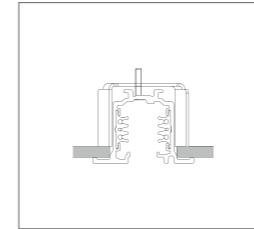


**Track Inside Clip**  
 40 x (L + Endcap / Supply / Corners) x 70  
 200 13 14 01

**D. Accessories**



**Track Cutting Tool**  
 200 12 01

**A. Tacak.**

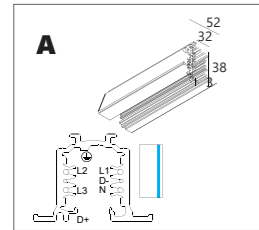


**Track 3F Dim In**  
 1m  
 200 13 410 ◊  
 ◊ B (Black) / W (White)  
 110-240V / 50-60Hz / 3F


2m  
 200 13 420 ◊  
 ◊ B (Black) / W (White)  
 100-240V / 50-60Hz / 3F

3m  
 200 13 430 ◊  
 ◊ B (Black) / W (White)  
 100-240V / 50-60Hz / 3F


**B. Endcap / Supply / Corners.**

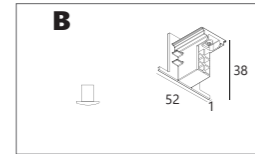


**Track in End Cap**  
 200 13 41 ◊  
 ◊ B (Black) / W (White)

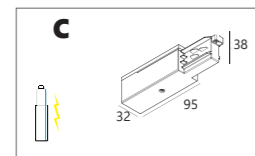


**Track End Supply 11**  
 200 12 11 ◊  
 ◊ B (Black) / W (White)  
 100-240V / 50-60Hz

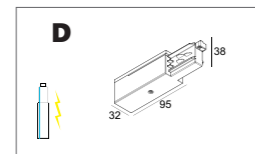


**Track End Supply 12**  
 200 12 12 ◊  
 ◊ B (Black) / W (White)  
 100-240V / 50-60Hz

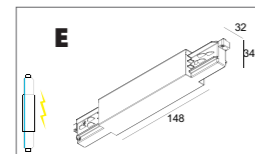


**Track Middle Supply**  
 200 12 14 ◊  
 ◊ B (Black) / W (White)  
 100-240V / 50-60Hz

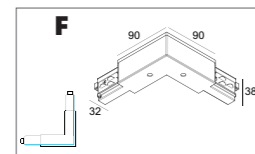


**Track Corner 90° Out**  
 200 12 35 ◊  
 ◊ B (Black) / W (White)

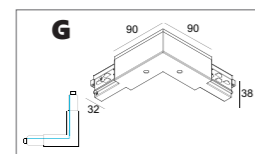


**Track Corner 90° In**  
 200 12 34 ◊  
 ◊ B (Black) / W (White)

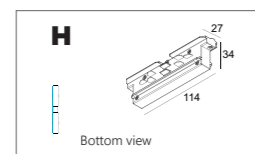


**Track Corner 180°**  
 200 12 21 ◊  
 ◊ B (Black) / W (White)

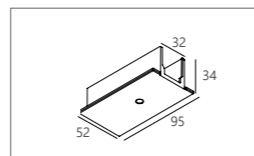


**Track In End Cover**  
 200 13 11 ◊  
 ◊ B (Black) / W (White)

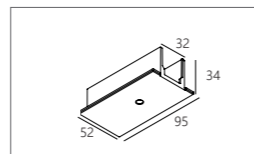


**Track In End Cover**  
 200 13 11 ◊  
 ◊ B (Black) / W (White)



**Track In Middle Cover**  
 200 13 14 ◊  
 ◊ B (Black) / W (White)



**Track In 90° Cover**  
 200 13 12 ◊  
 ◊ B (Black) / W (White)




**Track In 90° Cover**  
 200 13 12 ◊  
 ◊ B (Black) / W (White)




# Surface Mounted

## COMPOSITION

- A. Track 3F Dim On
- B. Endcap / Supply / Corners
- C. Fixation
- D. Current Supply
- E. Accessories
- F. Option

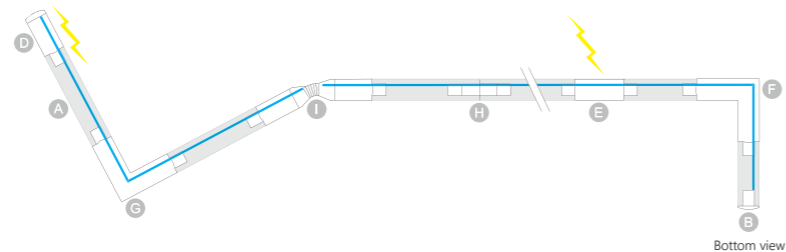


### A. Tacak.




Track 3F Dim On

1m
200 12 410 ◊
◊ B (Black) / W (White)
110-240V / 50-60Hz / 3F
2m
200 12 420 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz / 3F
3m
200 12 430 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz / 3F


### B. Endcap / Supply / Corners.




Track On End Cap
200 12 41 ◊
◊ B (Black) / W (White)




Track End Supply 11
200 12 11 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz




Track End Supply 12
200 12 12 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz

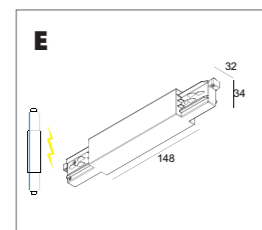


Track Middle Supply
200 12 14 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz

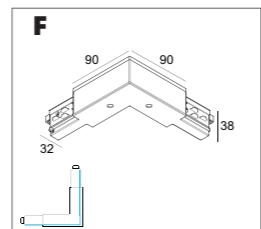


Track Corner 90° Out
200 12 35 ◊
◊ B (Black) / W (White)

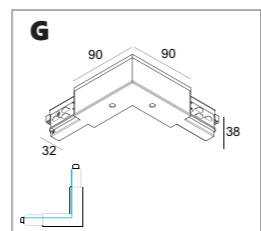

Track Corner 90° In
200 12 34 ◊
◊ B (Black) / W (White)

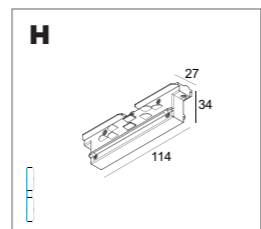


Track Corner 180°
200 12 21 ◊
◊ B (Black) / W (White)

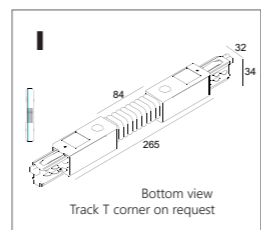


Track Flex Corner
200 12 24 ◊
◊ B (Black) / W (White)
Flexible 60° - 300°


### C. Fixation

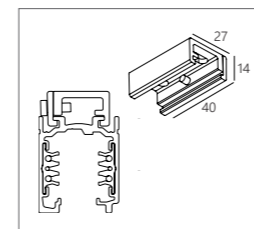

Track Dim On Direct Fixation
200 12 02 ◊
◊ ANO (Anodised)

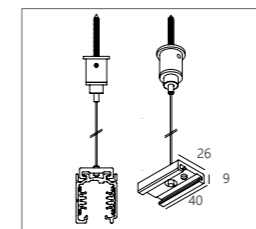


Track Dim On Suspension 3.0
200 12 13 ◊
L 3.0m

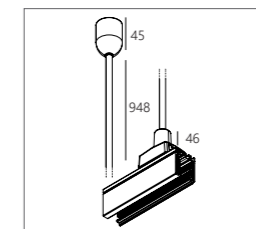


Track Dim On ROD Suspension 1.0
200 12 50 ◊
◊ A (Alu Grey) / B (Black) / W (White)
L 948mm

### D. Current supply



Track Current Supply
5 x 0.75mm <sup>2</sup> 3.0m
200 99 53
L 3.0m / 5x 0.75m <sup>2</sup>
Options: Cable base R/S


### E. Accessories



Track Cutting Tool
200 12 01

### F. Option


INSTALLATION		
Cable Base R ◊	Ø57 x 41	
203 99 55 ◊		
◊ ANO (Anodised) / B (Black) / W (White)		
Cable Base S ◊	57 x 57 x 41	
203 99 56 ◊		
◊ ANO (Anodised) / B (Black) / W (White)		
Coverset R ◊	Ø62	
204 00 62 ◊		
204 00 90 ◊	Ø90	
204 00 100 ◊	Ø100	
◊ ANO (Anodised) / B (Black) / W (White)		
Coverset S ◊	62 x 62	
204 62 62 ◊	80 x 80	
204 80 80 ◊	90 x 90	
204 90 90 ◊		
◊ ANO (Anodised) / B (Black) / W (White)		

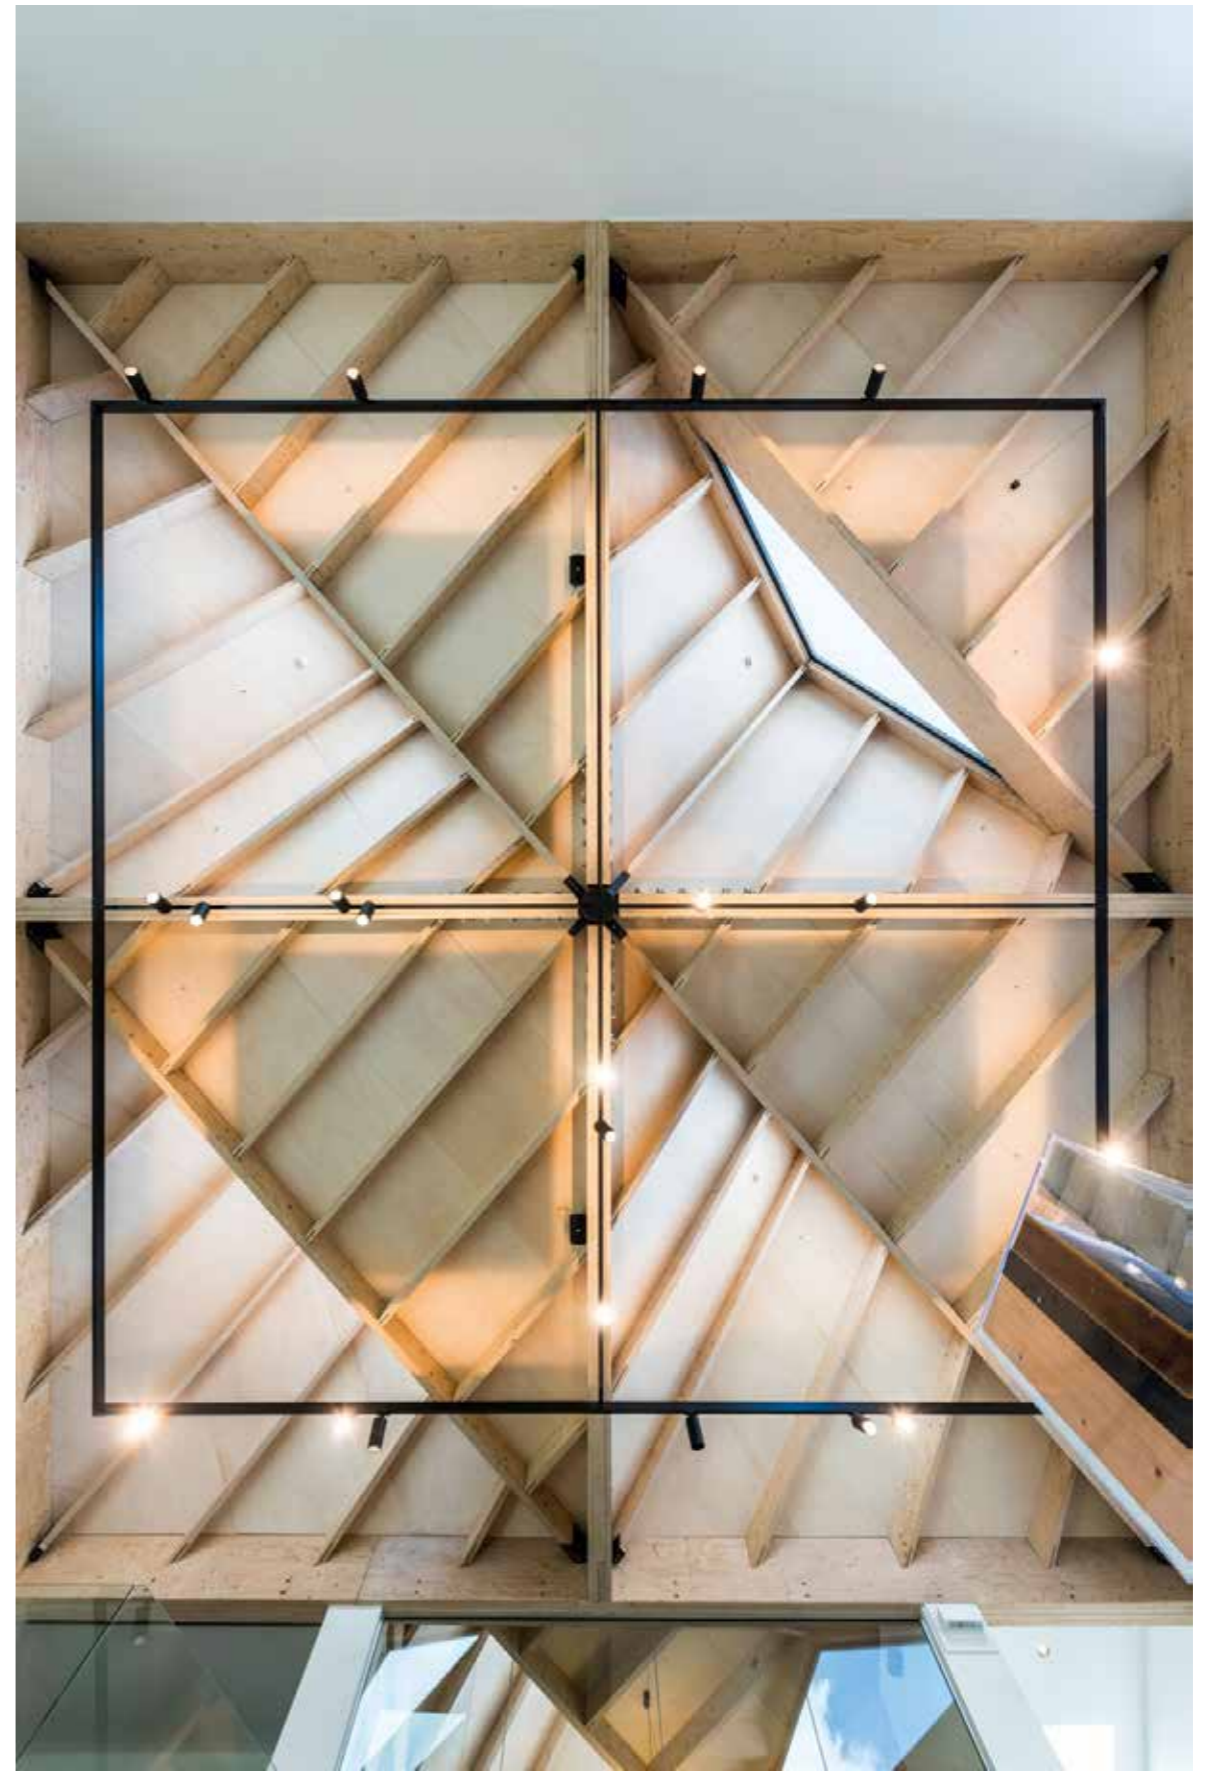


# Pendant

## COMPOSITION

- A. Track 3F Dim H
- B. Endcap / Supply / Corners
- C. Fixation
- D. Current supply
- E. Accessories
- F. Option

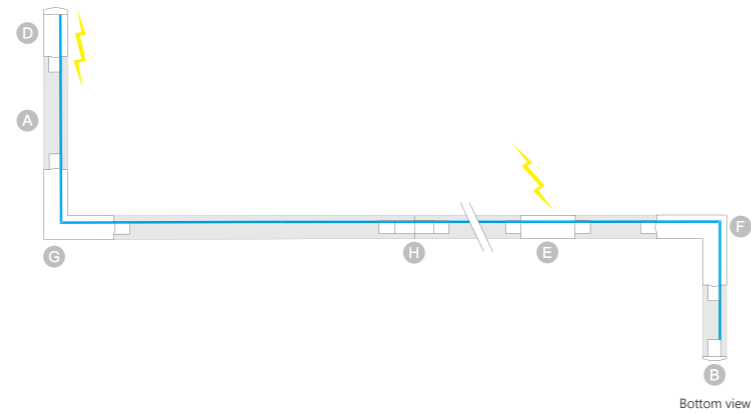


### A. Tacak.

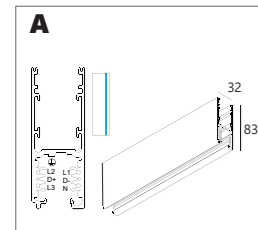


Track 3F Dim H

1m
200 14 410 ◊
◊ B (Black) / W (White)
110-240V / 50-60Hz / 3F
2m
200 14 420 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz / 3F
3m
200 14 430 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz / 3F


### B. Endcap / Supply / Corners.




Track H End Cap
200 14 41 ◊
◊ B (Black) / W (White)

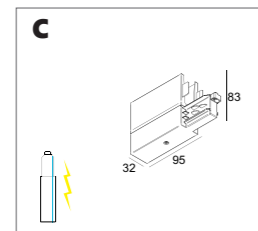


Track H End Supply 11
200 14 11 ◊
◊ B (Black) / W (White)
220-240V / 50-60Hz

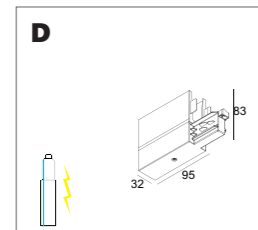


Track H End Supply 12
200 14 12 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz

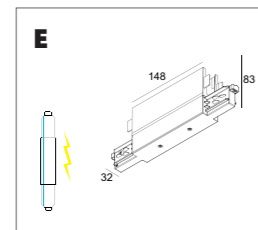


Track H Middle Supply
200 14 14 ◊
◊ B (Black) / W (White)
100-240V / 50-60Hz

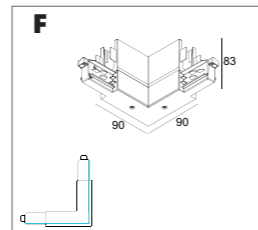

Track H Corner 90° out
200 14 35 ◊
◊ B (Black) / W (White)

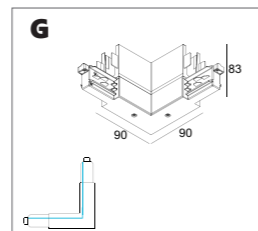


Track H Corner 90° in
200 14 34 ◊
◊ B (Black) / W (White)

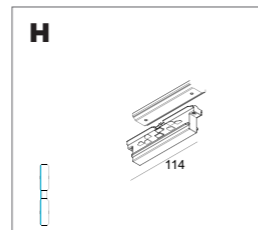

Track H Corner 180°
200 14 21 ◊
◊ B (Black) / W (White)


### C. Fixation

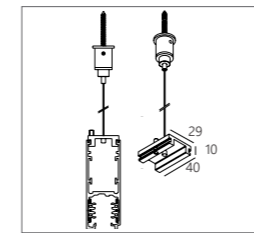

Track Dim H Suspension 3.0

200 14 13
L 3.0m


### D. Current supply



Track Current Supply  
5 x 0.75mm<sup>2</sup> 3.0m

200 99 53
L 3.0m / 5x 0.75m <sup>2</sup>
Options: Cable base R/S

### E. Accessories



Track Cutting Tool

200 12 01
-----------


### F. Option

INSTALLATION		
Cable Base R ◊	Ø57 x 41	
203 99 55 ◊		
◊ ANO (Anodised) / B (Black) / W (White)		
Cable Base S ◊	57 x 57 x 41	
203 99 56 ◊		
◊ ANO (Anodised) / B (Black) / W (White)		
Coverset R ◊	Ø62	
204 00 62 ◊	Ø90	
204 00 90 ◊	Ø100	
204 00 100 ◊		
◊ ANO (Anodised) / B (Black) / W (White)		
Coverset S ◊	62 x 62	
204 62 62 ◊	80 x 80	
204 80 80 ◊	90 x 90	
204 90 90 ◊		
◊ ANO (Anodised) / B (Black) / W (White)		






**Multinova 30 ADM**

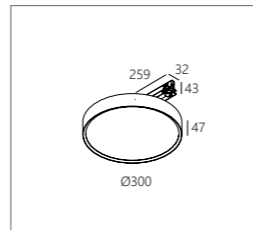

2700-6500K / CRI 90		
9.4W / 1367lm / 220-240V		
SBL	DALI DIM	PRISMATIC
27933 9005 ◊		27934 9005 ◊
◊ B (Black) / W (White)		


**Multinova 55 ADM**

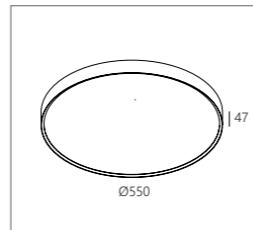

2700-6500K / CRI 90		
21W / 3047lm / 220-240V		
SBL	DALI DIM	PRISMATIC
28033 9005 ◊		28034 9005 ◊
◊ B (Black) / W (White)		




**Spy 52 ADM**

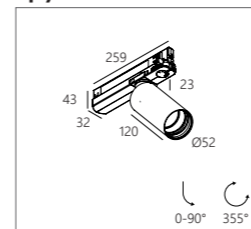


2700-6500K / CRI 90		
9W / 1087lm / 220-240V		
20°	45°	
DALI DIM		
19881 9025 ◊	19881 9035 ◊	
◊ B (Black) / W (White)		
Compulsory : IH		
Accessories : iv		

**Spy 66 ADM**

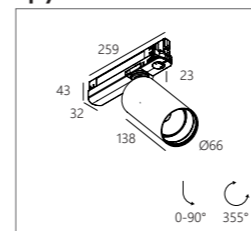

2700-6500K / CRI 90		
9W / 1087lm / 220-240V		
18°	30°	45°
DALI DIM		
24629 9015 ◊	24629 9025 ◊	24629 9035 ◊
◊ B (Black) / W (White)		
Compulsory : II		
Accessories : v		

**Spy 90 ADM**

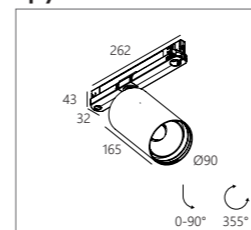


2700-6500K / CRI 90		
17.8W / 2054lm / 220-240V		
18°	30°	45°
DALI DIM		
19884 9015 ◊	19884 9025 ◊	19884 9035 ◊
◊ B (Black) / W (White)		
Compulsory : IJ		
Accessories : vi		





# Glee

## Glee

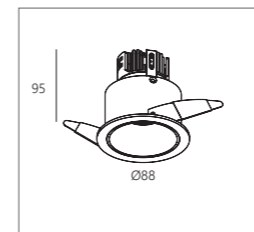


Ø83

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7480-G5-TW9C-20-□	MX 7480-G5-TW9C-30-□	MX 7480-G5-TW9C-40-□
□ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7480-G6-09OBTWC-20-□	MX 7480-G6-09OBTWC-30-□	MX 7480-G6-09OBTWC-40-□
□ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		

## Glee Adjustable

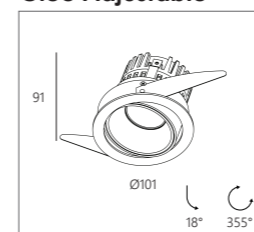


Ø96

Standard		
2700-6500K / CRI 90		
10.2W / 1163lm / 550mA		
20°	30°	40°
MX 7475-G6-TW9C-20-□	MX 7475-G6-TW9C-30-□	MX 7475-G6-TW9C-40-□
□ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
10.8W / 949lm / 300mA		
20°	30°	40°
MX 7475-G6-09OBTWC-20-□	MX 7475-G6-09OBTWC-30-□	MX 7475-G6-09OBTWC-40-□
□ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		

## Glee Wallwasher

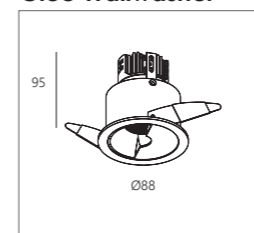

Ø83

Standard	Xicato
2700-6500K / CRI 90	2700-6000K / CRI 95
9W / 1030lm / 500mA	8.8W / 771lm / 250mA
35°	35°
MX 7467-G5-TW9C-35-□	MX 7467-G6-09OBTWC-35-□
□ 84 (White Trim & Silver Reflector)	□ 84 (White Trim & Silver Reflector)
Driver : DB / DD	Driver : DA / DC
Accessories : viii	Accessories : viii



Glee / Glee Adjustable




Glee Wallwasher



# Glee Spot

## Glee Spot (Offset Tilting Version)




Ø83

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7476-G6-TW9C-20- $\varnothing$	MX 7476-G6-TW9C-30- $\varnothing$	MX 7476-G6-TW9C-40- $\varnothing$
$\varnothing$ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7476-G6-09OBTWC-20- $\varnothing$	MX 7476-G6-TW9C-30- $\varnothing$	MX 7476-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		

## Glee Spot Adjustable

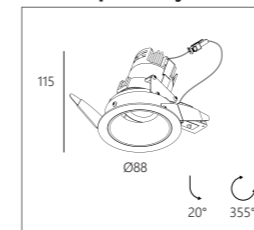

Ø83

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7495-G6-TW9C-20- $\varnothing$	MX 7495-G6-TW9C-30- $\varnothing$	MX 7495-G6-TW9C-40- $\varnothing$
$\varnothing$ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7495-G6-09OBTWC-20- $\varnothing$	MX 7495-G6-09OBTWC-30- $\varnothing$	MX 7495-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		




Glee Spot / Glee Spot Adjustable

For further details, please refer to page 148 - 149




**Mini Glee**

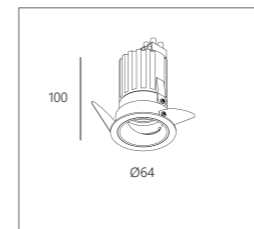

Ø59

2700-6500K / CRI 90		
7.4W / 762lm / 200mA		
20°	30°	40°
MX 7484-G6-TW6C-20-□	MX 7484-G6-TW6C-30-□	MX 7484-G6-TW6C-40-□
□ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : ix		


**Mini Glee Spot**

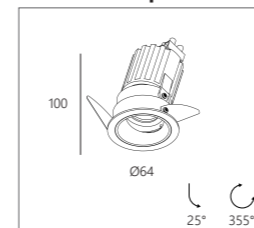

Ø59

2700-6500K / CRI 90		
7.4W / 762lm / 200mA		
20°	30°	40°
MX 7483-G6-TW6C-20-□	MX 7483-G6-TW6C-30-□	MX 7483-G6-TW6C-40-□
□ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : ix		

**Mini Glee Spot Wallwash**

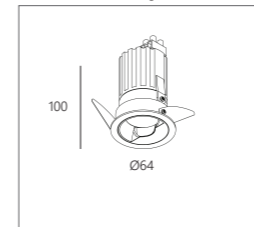

Ø59

2700-6500K / CRI 90		
7.4W / 762lm / 200mA		
Wallwash		
MX 7485-G6-TW6C-NA-□		
□ 84 (White Trim & Silver Reflector)		
Driver : DA / DC		


# Mini Glee



Mini Glee / Mini Glee Spot




Mini Glee Spot Wallwash

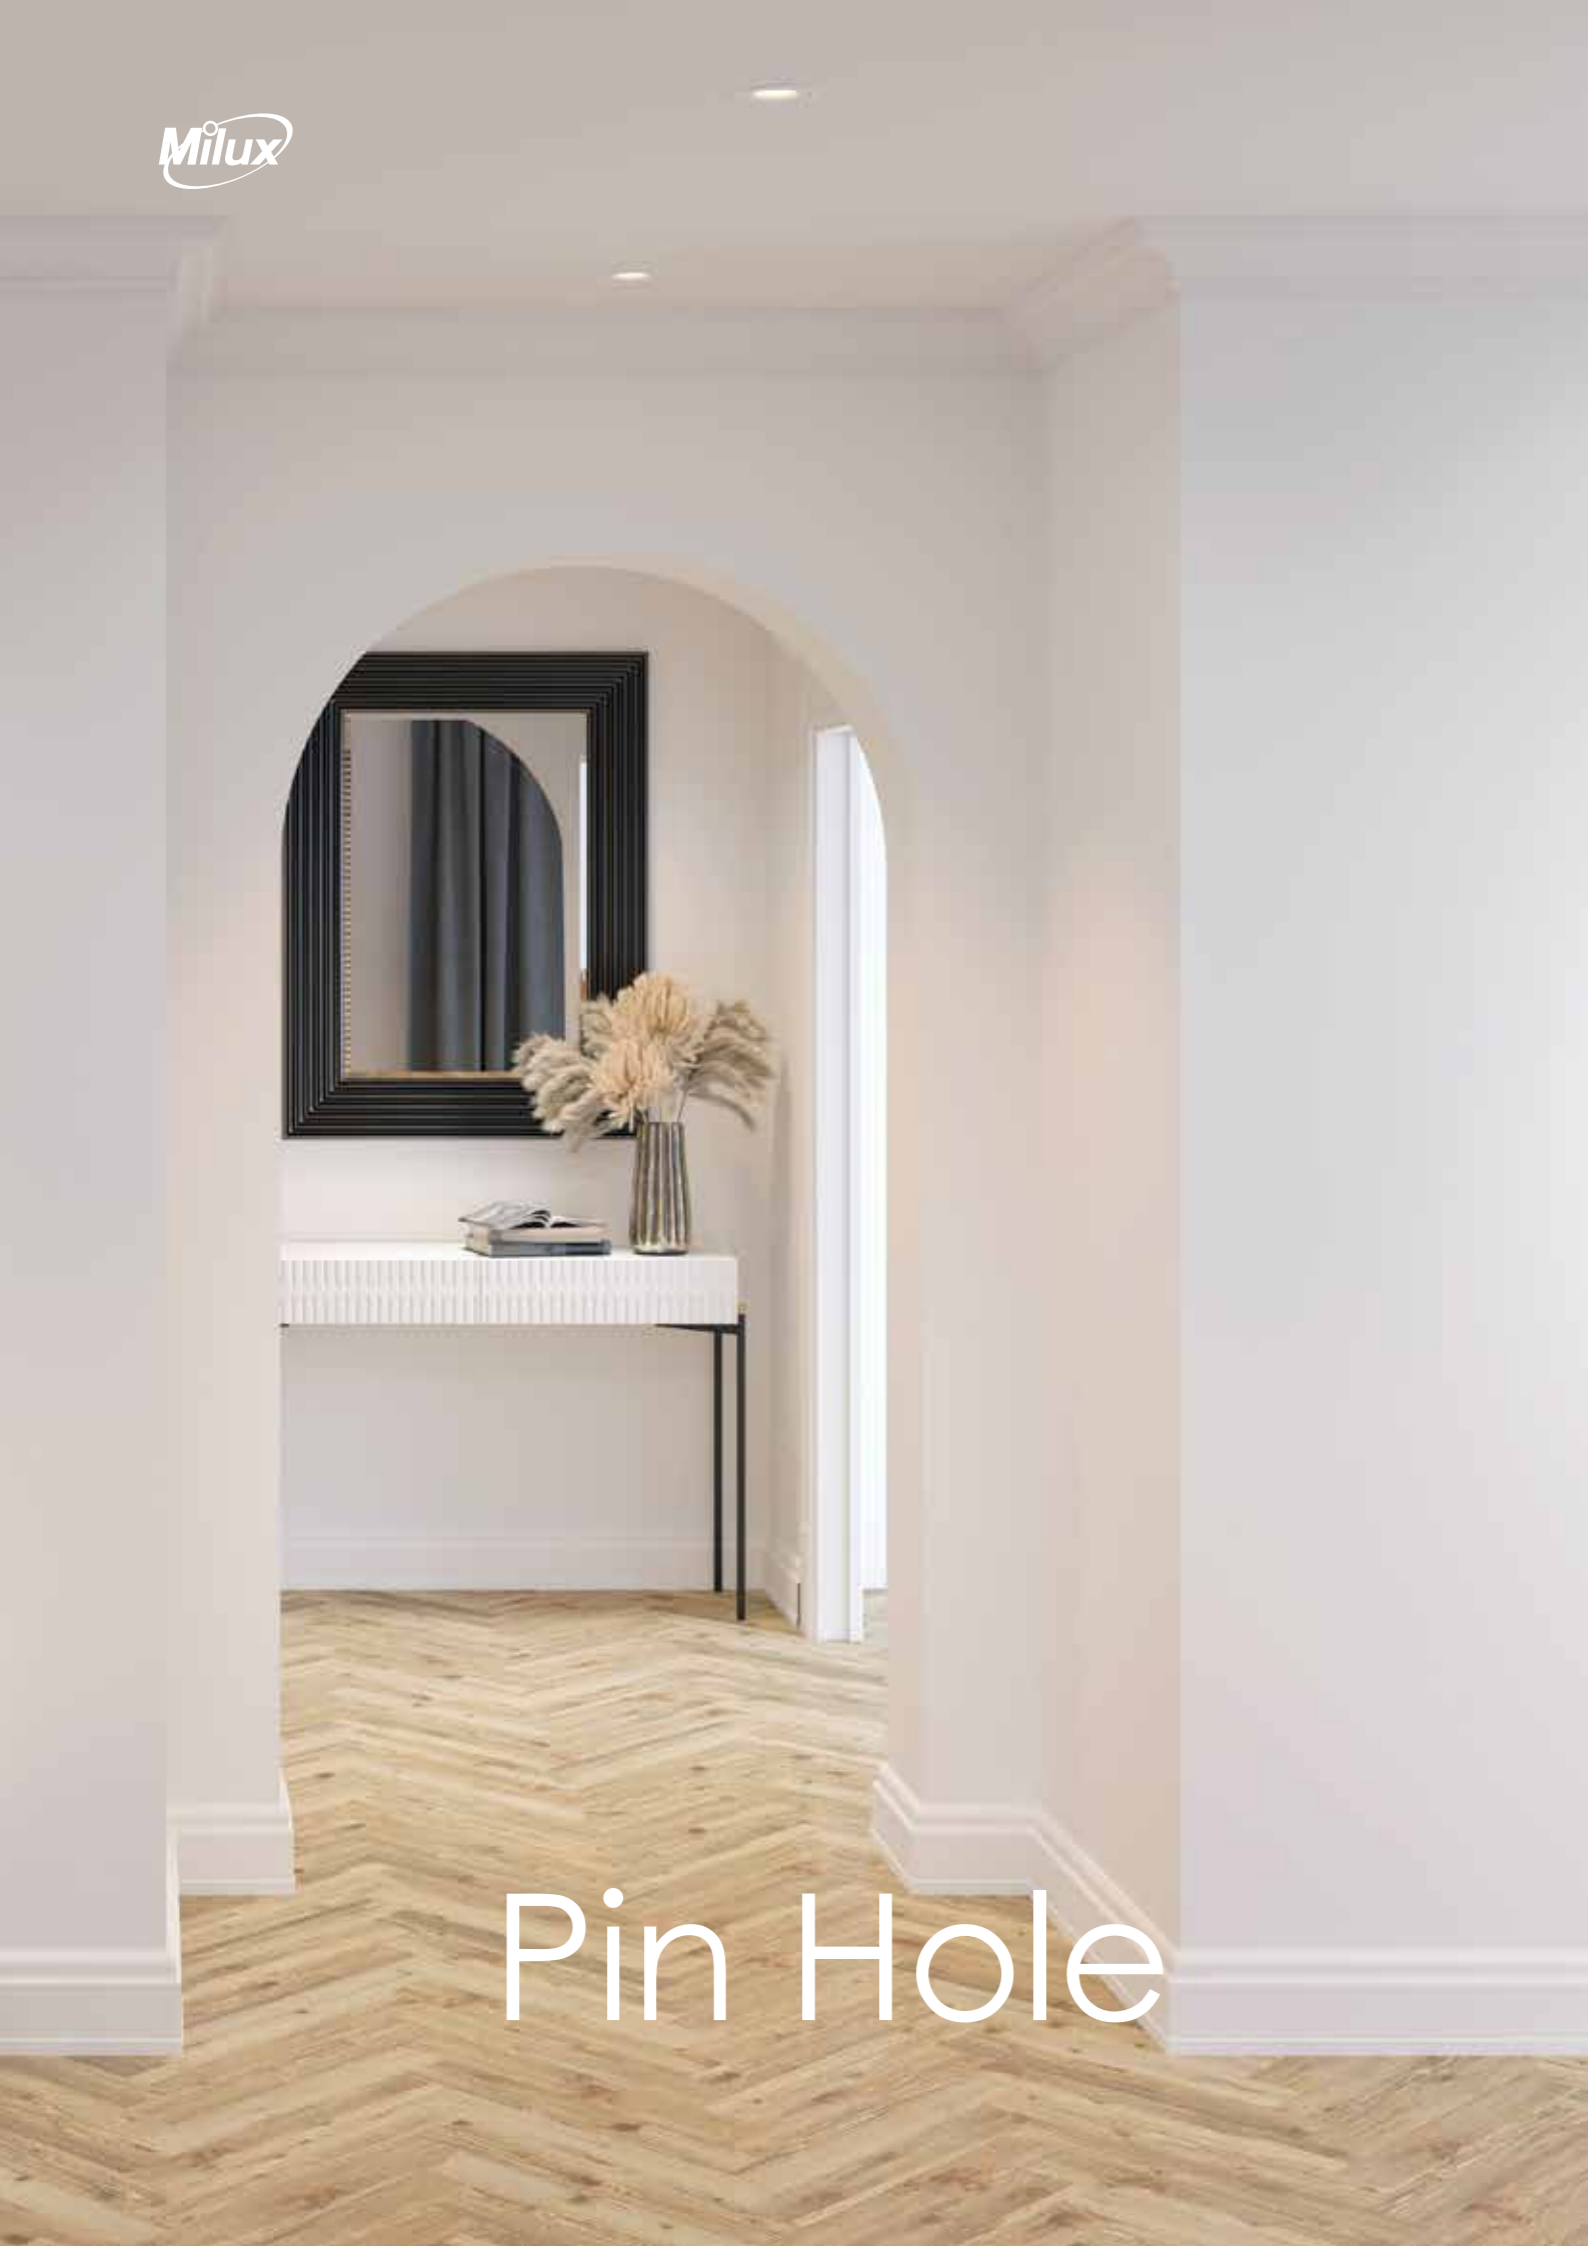


# Pin Hole

## Pin Hole Adjustable




**ROUND**  
Ø89




**SQUARE**  
Ø89

<b>Standard</b>			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Round	MX 7425-G5-TW9C-20-◊	MX 7425-G5-TW9C-30-◊	MX 7425-G5-TW9C-40-◊
Square	MX 7411-G5-TW9C-20-◊	MX 7411-G5-TW9C-30-◊	MX 7411-G5-TW9C-40-◊
◊ 80 (White) / 10 (Black)			
Driver : DB / DD			
Accessories : viii			
<b>Xicato</b>			
2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	20°	30°	40°
Round	MX 7425-G6-09OBTWC-20-◊	MX 7425-G6-09OBTWC-30-◊	MX 7425-G6-09OBTWC-40-◊
Square	MX 7411-G6-09OBTWC-20-◊	MX 7411-G6-09OBTWC-30-◊	MX 7411-G6-09OBTWC-40-◊
◊ 80 (White) / 10 (Black)			
Driver : DA / DC			
Accessories : viii			

## Pin Hole Adjustable with Glass Cover

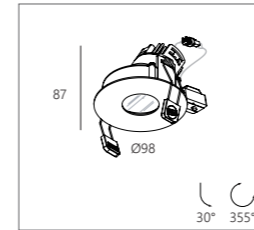

**ROUND**  
Ø89

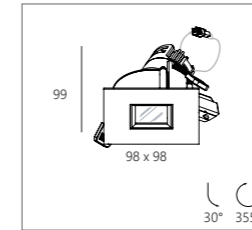


**SQUARE**  
Ø89

<b>Standard</b>			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Round	MX 7425C-G5-TW9C-20-◊	MX 7425C-G5-TW9C-30-◊	MX 7425C-G5-TW9C-40-◊
Square	MX 7411C-G5-TW9C-20-◊	MX 7411C-G5-TW9C-30-◊	MX 7411C-G5-TW9C-40-◊
◊ 80 (White) / 10 (Black)			
IP55			
Driver : DB / DD			
Accessories : viii			
<b>Xicato</b>			
2700-6500K / CRI 95			
8.8W / 771lm / 250mA			
	20°	30°	40°
Round	MX 7425C-G6-09OBTWC-20-◊	MX 7425C-G6-09OBTWC-30-◊	MX 7425C-G6-09OBTWC-40-◊
Square	MX 7411C-G6-09OBTWC9-20-◊	MX 7411C-G6-09OBTWC-30-◊	MX 7411C-G6-09OBTWC-40-◊
◊ 80 (White) / 10 (Black)			
IP55			
Driver : DA / DC			
Accessories : viii			




**Pin Hole**

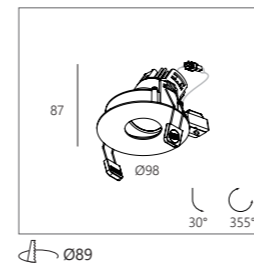

<b>Standard</b>		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7426-G5-TW9C-20- $\varnothing$	MX 7426-G5-TW9C-30- $\varnothing$	MX 7426-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DB / DD		
Accessories : viii		

<b>Xicato</b>		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7426-G6-09OBTWC-20- $\varnothing$	MX 7426-G6-09OBTWC-30- $\varnothing$	MX 7426-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		

**Pin Hole with Glass Cover**

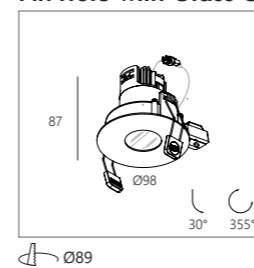

<b>Standard</b>		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7426C-G5-TW9C-20- $\varnothing$	MX 7426C-G5-TW9C-30- $\varnothing$	MX 7426C-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
IP55		
Driver : DB / DD		
Accessories : viii		

<b>Xicato</b>		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7426C-G6-09OBTWC-20- $\varnothing$	MX 7426C-G6-09OBTWC-30- $\varnothing$	MX 7426C-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
IP55		
Driver : DA / DC		
Accessories : viii		



Pin Hole




Pin Hole Sq



# Pin Slot

## Pin Slot Adjustable




Ø78

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7427-G5-TW9C-20- $\varnothing$	MX 7427-G5-TW9C-30- $\varnothing$	MX 7427-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7427-G6-09OBTWC-20- $\varnothing$	MX 7427-G6-09OBTWC-30- $\varnothing$	MX 7427-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		

## Pin Slot Adjustable with Glass Cover

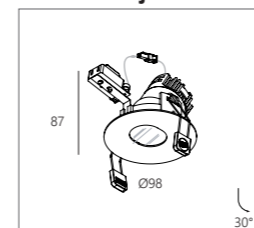


Ø78

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7427C-G5-TW9C-20- $\varnothing$	MX 7427C-G5-TW9C-30- $\varnothing$	MX 7427C-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
IP 55		
Driver : DB / DD		
Accessories : viii		


Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7427-G6-09OBTWC-20- $\varnothing$	MX 7427-G6-09OBTWC-30- $\varnothing$	MX 7427-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
IP55		
Driver : DA / DC		
Accessories : viii		



Pin Slot Adjustable

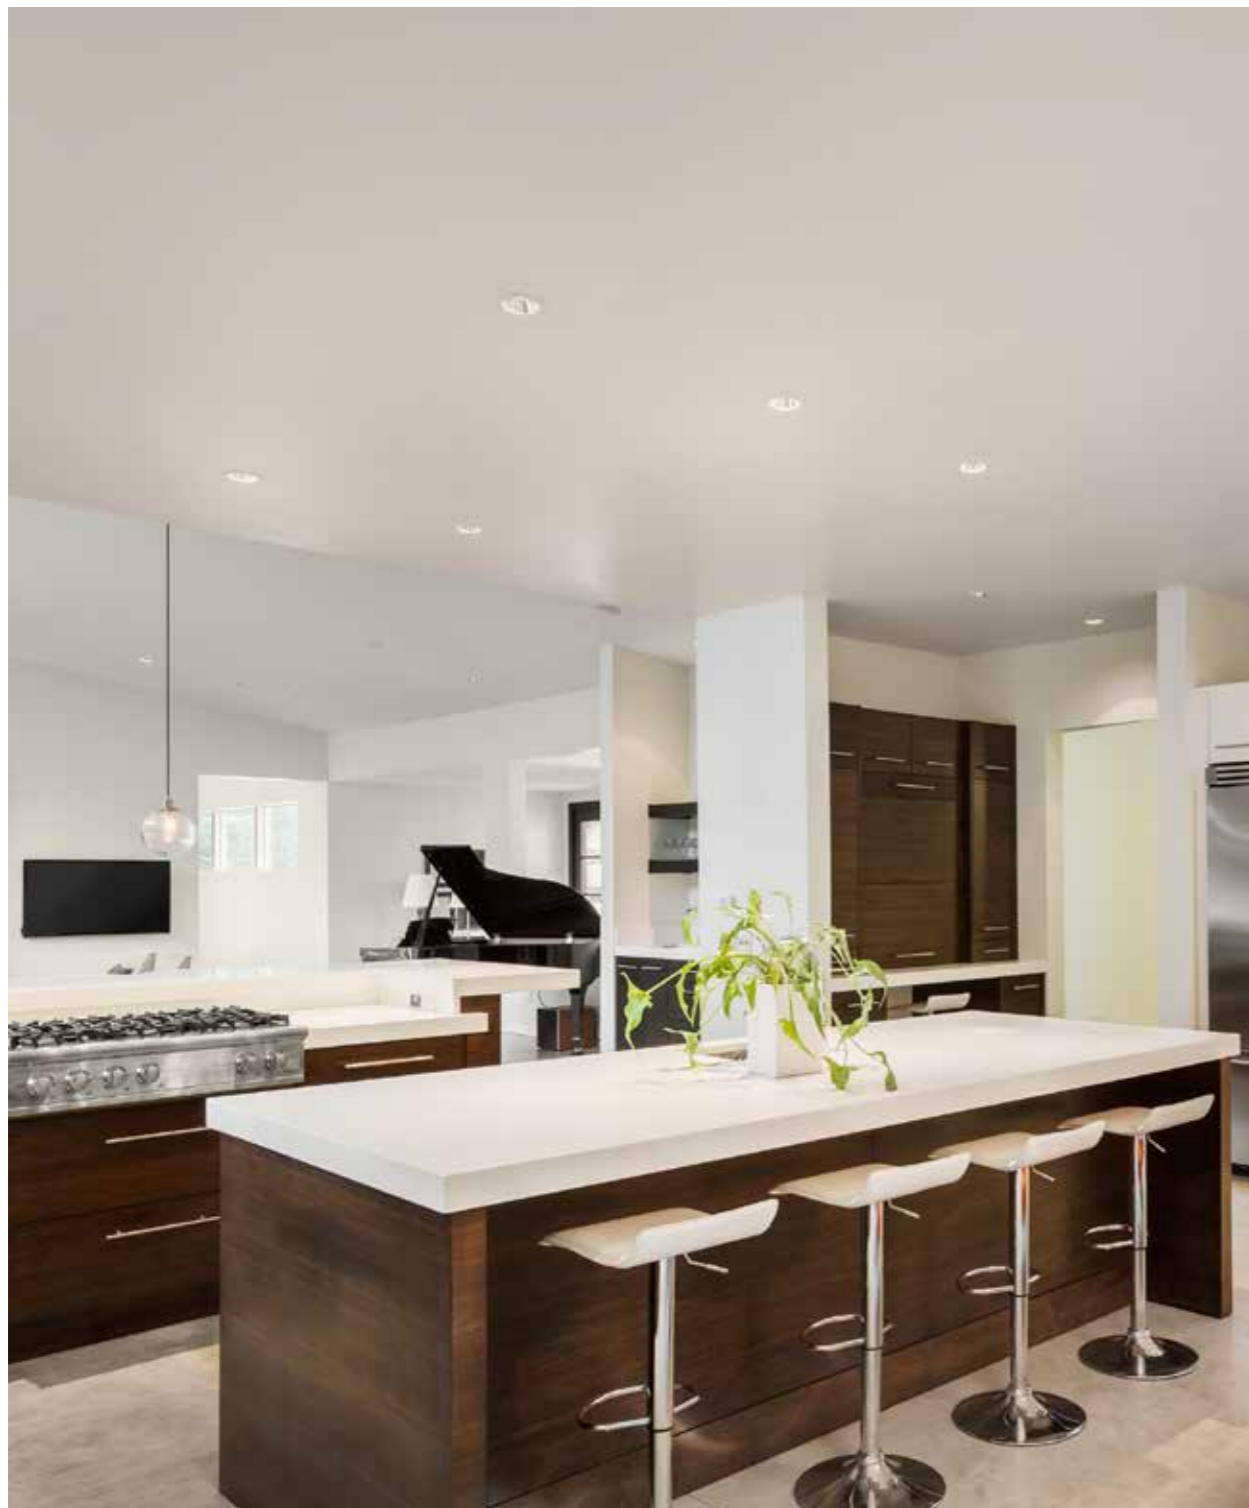


**Renia**



Ø78

**Renia Adjustable**



Ø85

<b>Standard</b>		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7490-G5-TW9C-20- $\varnothing$	MX 7490-G5-TW9C-30- $\varnothing$	MX 7490-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DB / DD		
Accessories : viii		

<b>Xicato</b>		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7490-G6-09OBTWC-20- $\varnothing$	MX 7490-G6-09OBTWC-30- $\varnothing$	MX 7490-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		

<b>Standard</b>		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7491-G5-TW9C-20- $\varnothing$	MX 7491-G5-TW9C-30- $\varnothing$	MX 7491-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
IP55		
Driver : DB / DD		
Accessories : viii		

<b>Xicato</b>		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7491-G6-09OBTWC-20- $\varnothing$	MX 7491-G6-09OBTWC-30- $\varnothing$	MX 7491-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		


# Renia



Renia




Renia Adjustable

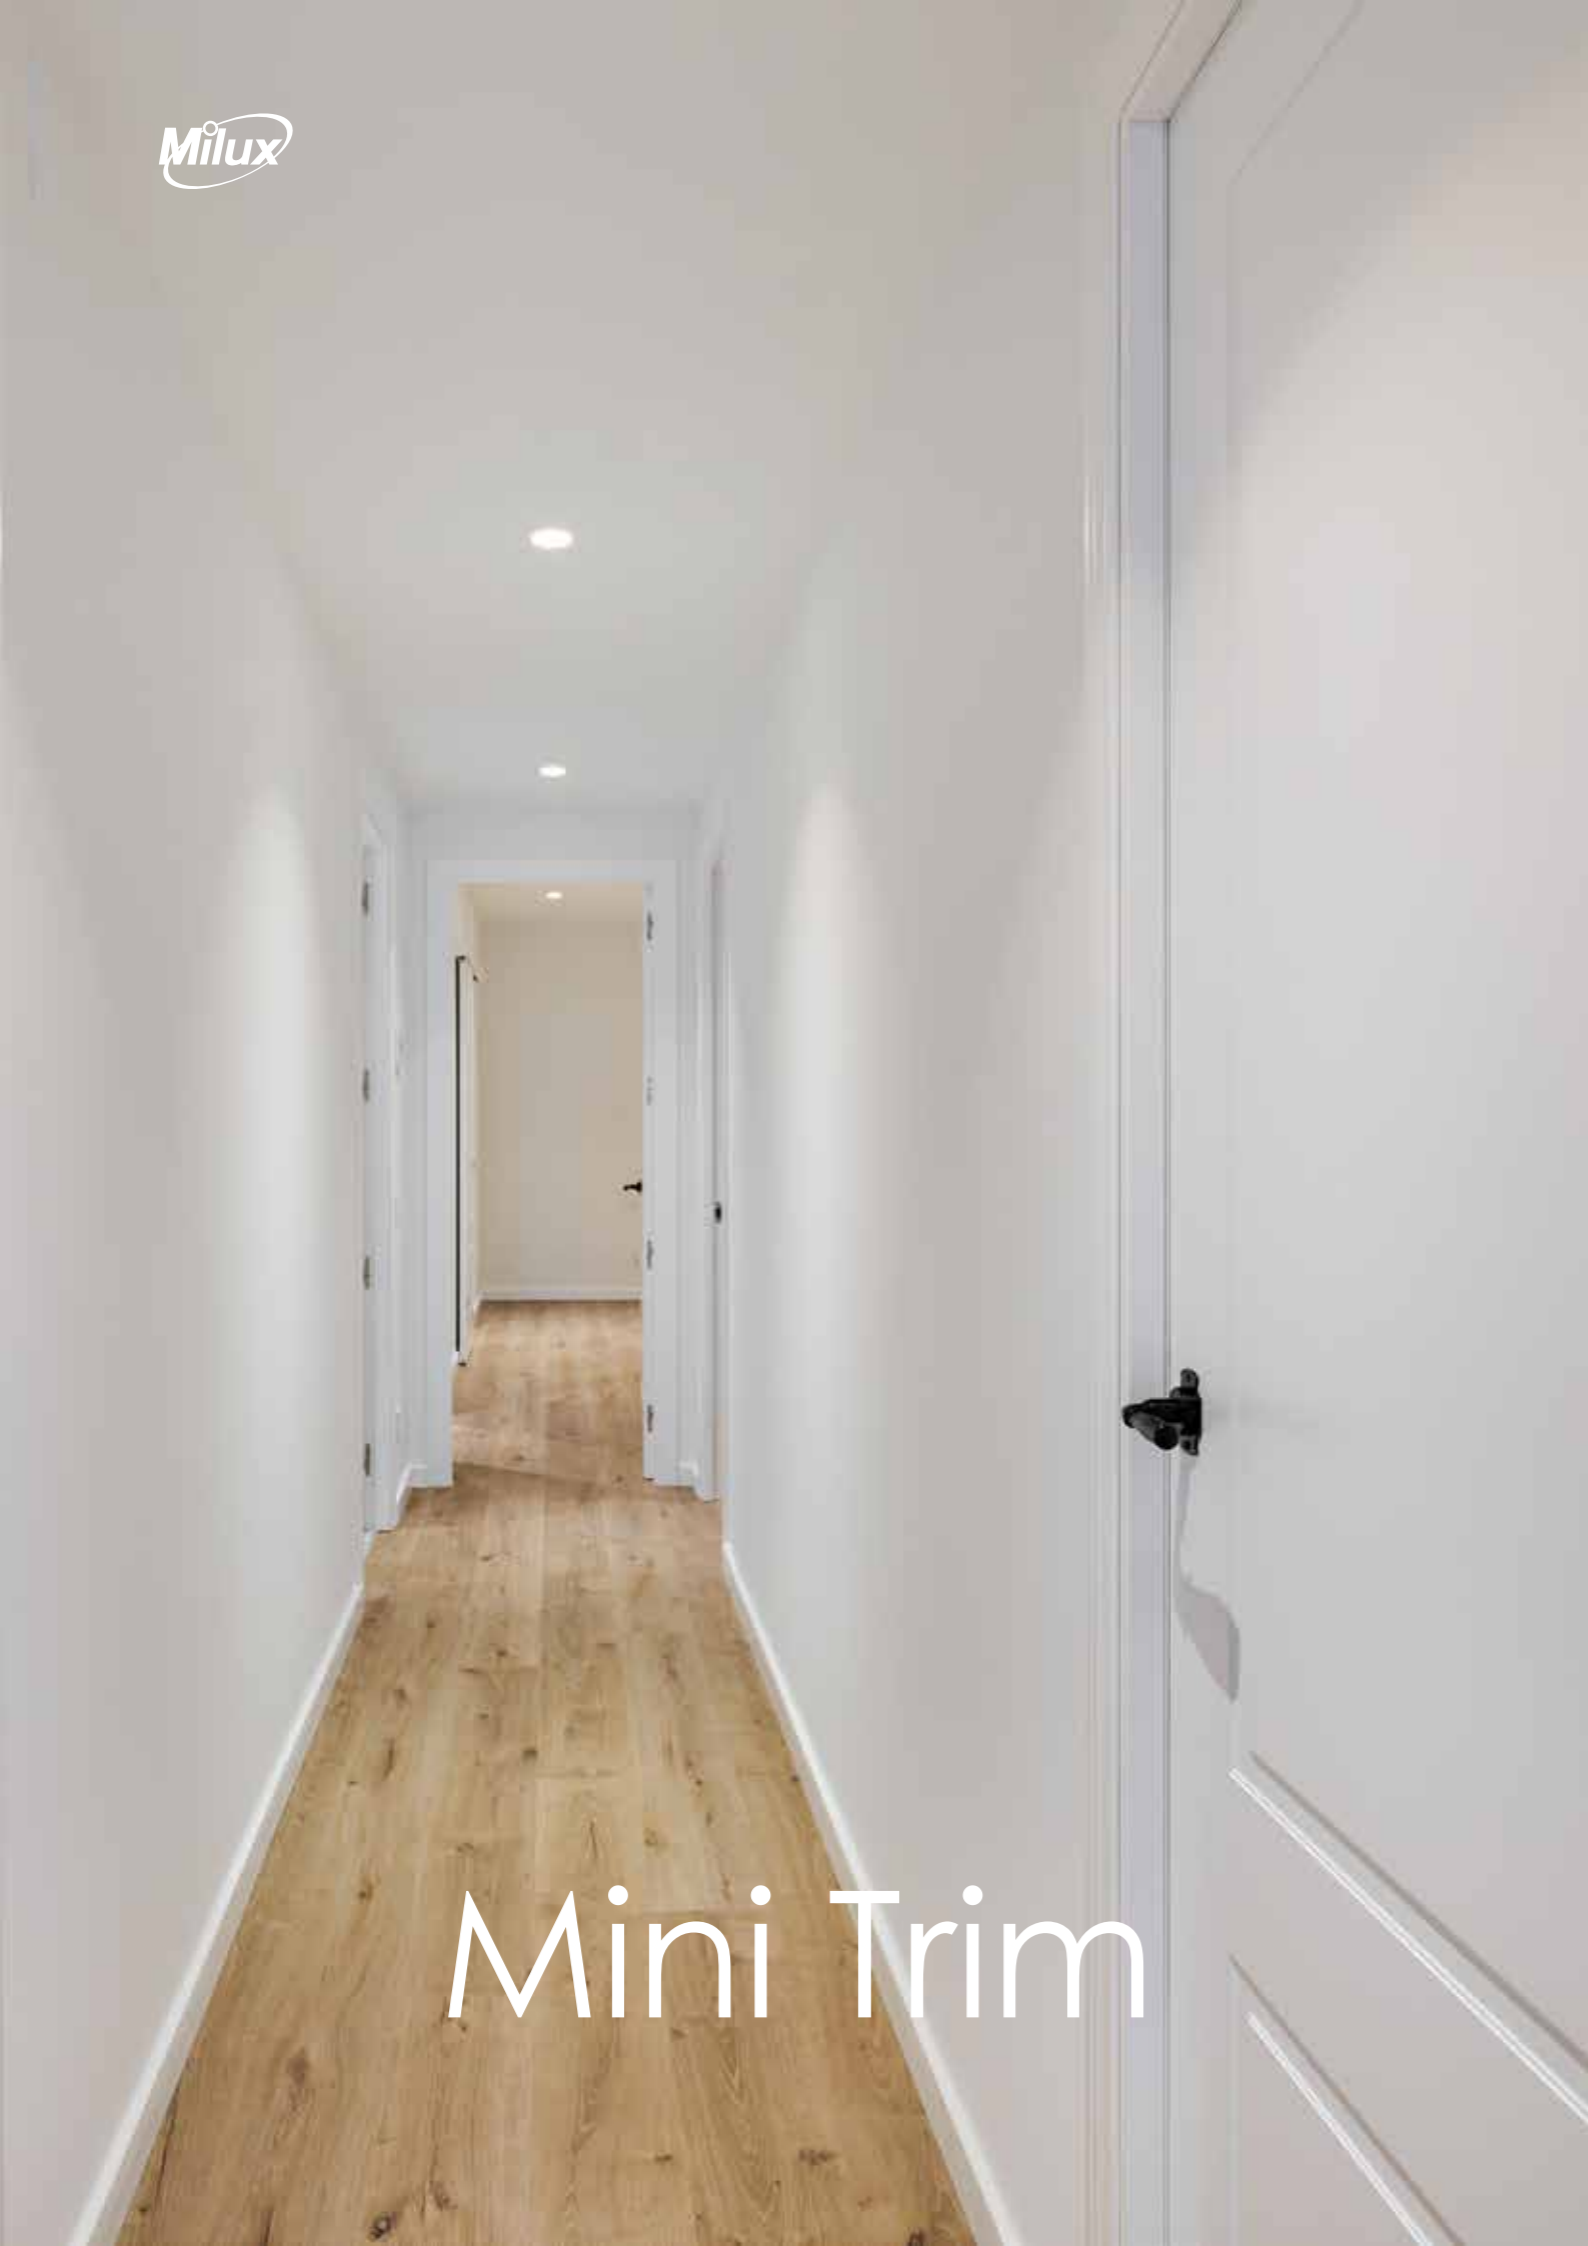

# Mini Trim

## Mini Trim




81 x 81


Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7460-G5-TW9C-20- $\varnothing$	MX 7460-G5-TW9C-30- $\varnothing$	MX 7460-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DB / DD		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7460-G6-09BTWC-20- $\varnothing$	MX 7460-G6-09BTWC-30- $\varnothing$	MX 7460-G6-09BTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		

## Mini Trim Adjustable



ROUND  
Ø84




SQUARE  
101 x 101

Standard			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Round	MX 7463-G5-TW9C-20- $\varnothing$	MX 7463-G5-TW9C-30- $\varnothing$	MX 7463-G5-TW9C-40- $\varnothing$
Square	MX 7462-G5-TW9C-20- $\varnothing$	MX 7462-G5-TW9C-30- $\varnothing$	MX 7462-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)			
Driver : DB / DD			

Xicato			
2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	20°	30°	40°
Round	MX 7463-G6-09BTWC-20- $\varnothing$	MX 7463-G6-09BTWC-30- $\varnothing$	MX 7463-G6-09BTWC-40- $\varnothing$
Square	MX 7462-G6-09BTWC-20- $\varnothing$	MX 7462-G6-09BTWC-30- $\varnothing$	MX 7462-G6-09BTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)			
Driver : DA / DC			

## Mini Trim Wallwasher

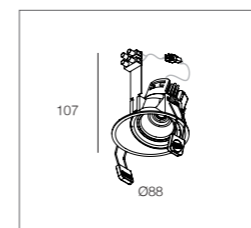

Ø84

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7478-G5-TW9C-20- $\varnothing$	MX 7478-G5-TW9C-30- $\varnothing$	MX 7478-G5-TW9C-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DB / DD		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
15°	24°	36°
MX 7478-G6-09BTWC-20- $\varnothing$	MX 7478-G6-09BTWC-30- $\varnothing$	MX 7478-G6-09BTWC-40- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		



Mini Trim Adjustable Round




Mini Trim Adjustable Square






# Multi Super Mini


## Multi Super Mini




**ROUND**  
∅98



**SQUARE (1 HEAD)**  
98 x 98



**SQUARE (2 HEADS)**  
98 x 180



**SQUARE (3 HEADS)**  
98 x 262

### Standard

2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Round	MX 7466-G5-TW9C-20-∅	MX 7466-G5-TW9C-30-∅	MX 7466-G5-TW9C40-∅
Square (1 Head)	MX 7464S-G5-TW9C-20-∅	MX 7464S-G5-TW9C-30-∅	MX 7464S-G5-TW9C40-∅
Square (2 Heads)	MX 7464D-G5-TW9C-20-∅	MX 7464D-G5-TW9C-30-∅	MX 7464D-G5-TW9C40-∅
Square (3 Heads)	MX 7464T-G5-TW9C-20-∅	MX 7464T-G5-TW9C-30-∅	MX 7464T-G5-TW9C40-∅
∅ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DB / DD			
Accessories : viii			

### Xicato

2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	15°	24°	36°
Round	MX 7466-G6-09OBTWC-20-∅	MX 7466-G6-09OBTWC-30-∅	MX 7466-G6-09OBTWC-40-∅
Square (1 Head)	MX 7464S-G6-09OBTWC-20-∅	MX 7464S-G6-09OBTWC-30-∅	MX 7464S-G6-09OBTWC-40-∅
Square (2 Heads)	MX 7464D-G6-09OBTWC-20-∅	MX 7464D-G6-09OBTWC-30-∅	MX 7464D-G6-09OBTWC-40-∅
Square (3 Heads)	MX 7464T-G6-09OBTWC-20-∅	MX 7464T-G6-09OBTWC-30-∅	MX 7464T-G6-09OBTWC-40-∅
∅ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DA / DC			
Accessories : viii			




Multi Super Mini Square (2 Heads)




# Multi Super Mini Trimless


## Multi Super Mini Trimless



**SQUARE (1 HEAD)**  
97 x 97



**SQUARE (2 HEADS)**  
97 x 179



**SQUARE (3 HEADS)**  
97 x 261

### Standard

2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Square (1 Head)	MX 7465S-G5-TW9C-20- $\varnothing$	MX 7465S-G5-TW9C-30- $\varnothing$	MX 7465S-G5-TW9C-40- $\varnothing$
Square (2 Heads)	MX 7465D-G5-TW9C-20- $\varnothing$	MX 7465D-G5-TW9C-30- $\varnothing$	MX 7465D-G5-TW9C-40- $\varnothing$
Square (3 Heads)	MX 7465T-G5-TW9C-20- $\varnothing$	MX 7465T-G5-TW9C-30- $\varnothing$	MX 7465T-G5-TW9C-40- $\varnothing$
$\varnothing$ 00B (Black Body) / 80W (White Body)			
Driver : DB / DD			
Compulsory : IK			
Accessories : viii			

### Xicato

2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	20°	30°	40°
Square (1 Head)	MX 7465S-G6-09OBTWC-20- $\varnothing$	MX 7465S-G6-09OBTWC-30- $\varnothing$	MX 7465S-G6-09OBTWC-40- $\varnothing$
Square (2 Heads)	MX 7465D-G6-09OBTWC-20- $\varnothing$	MX 7465D-G6-09OBTWC-30- $\varnothing$	MX 7465D-G6-09OBTWC-40- $\varnothing$
Square (3 Heads)	MX 7465T-G6-09OBTWC-20- $\varnothing$	MX 7465T-G6-09OBTWC-30- $\varnothing$	MX 7465T-G6-09OBTWC-40- $\varnothing$
$\varnothing$ 00B (Black Body) / 80W (White Body)			
Driver : DA / DC			
Compulsory : IK			
Accessories : viii			



Multi Super Mini Trimless Square  
(2 Heads)



DIP

### Next Generation Green Lighting

DIP LED Panel emits both direct and indirect illumination to maximise people comfort with uniform light distribution. With impressive visual comfort and dimming possibilities, DIP LED Panel can save up to 70% energy comparing to traditional T5 fluorescent.

The diffuser incorporates an innovative micro film that optimizes the control of beam angles and minimizes glare, so that a low Unified Glare Ratio can be achieved.

Powered by Philips Fortimo LED Module  
(High Efficiency)


High Light transmission diffuser

Diffuser with Anti-Glare Film


Indirect Swing for comfort and soft illumination without hotspot

Integrate emergency power pack (Optional)


#### DIP (595 x 595 mm)



**Diffuser**  
□ 578 x 578




**Anti Glare Microfilm**  
□ 578 x 578




**Metal Mesh**  
□ 578 x 578

2700-6500K / CRI 90			
11.3W / 2114lm or 16.3W / 3020lm / 220-240V			
	Diffuser	Anti Glare Microfilm	Metal Mesh
11.3W	MX 7398-G6-TW-11W-□	MX 7496-G6-TW-11W-□	MX 7498-G6-TW-11W-□
16.3W	MX 7398-G6-TW-17W-□	MX 7496-G6-TW-17W-□	MX 7498-G6-TW-17W-□
□ 80 (White)			


#### DIP (1195 x 595 mm)



**Diffuser**  
□ 1178 x 578



**Anti Glare Microfilm**  
□ 1178 x 578



**Metal Mesh**  
□ 1178 x 578

2700-6500K / CRI 90			
22.8W / 4228lm or 32.5W / 6040lm / 220V			
	Diffuser	Anti Glare Microfilm	Metal Mesh
22.8W	MX 7399-G6-TW-23W-□	MX 7497-G6-TW-23W-□	MX 7499-G6-TW-23W-□
32.5W	MX 7399-G6-TW-33W-□	MX 7497-G6-TW-33W-□	MX 7499-G6-TW-33W-□
□ 80 (White)			



DIP (Diffuser Version)



DIP (Anti Glare Microfilm Version)




DIP (Metal Mesh Version)



# Club

## Club

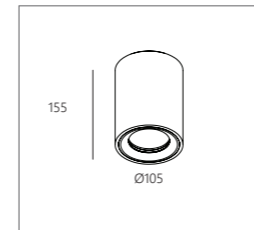


Standard		
2700-6500K / CRI 90		
10.5W / 1260lm / 300mA		
18°	26°	45°
MX 7642-G6-TW9-18- $\varnothing$	MX 7642-G6-TW9-26- $\varnothing$	MX 7642-G6-TW9-45- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		

## Xicato

Xicato		
2700-6500K / CRI 90		
10.3W / 885lm / 300mA		
18°	26°	45°
MX 7642-G6-12OBTW-18- $\varnothing$	MX 7642-G6-12OBTW-26- $\varnothing$	MX 7642-G6-12OBTW-45- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		

## Club Adjustable



Standard		
2700-6500K / CRI 90		
10.5W / 1260lm / 300mA		
18°	26°	45°
MX 7641-G6-TW9-18- $\varnothing$	MX 7641-G6-TW9-26- $\varnothing$	MX 7641-G6-TW9-45- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		

## Xicato

Xicato		
2700-6500K / CRI 90		
10.3W / 885lm / 300mA		
18°	26°	45°
MX 7641-G6-12OBTW-18- $\varnothing$	MX 7641-G6-12OBTW-26- $\varnothing$	MX 7641-G6-12OBTW-45- $\varnothing$
$\varnothing$ 80 (White) / 10 (Black)		
Driver : DA / DC		




Club




# Multi Box Mini


## Multi Box Mini



SQUARE (1 HEAD)



SQUARE (2 HEADS)



SQUARE (3 HEADS)


### Standard

2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	15°	24°	36°
Square (1 Head)	MX 7334S-G5-TW9C-15- $\varnothing$	MX 7334S-G5-TW9C-24- $\varnothing$	MX 7334S-G5-TW9C-36- $\varnothing$
Square (2 Heads)	MX 7334D-G5-TW9C-15- $\varnothing$	MX 7334D-G5-TW9C-24- $\varnothing$	MX 7334D-G5-TW9C-36- $\varnothing$
Square (3 Heads)	MX 7334T-G5-TW9C-15- $\varnothing$	MX 7334T-G5-TW9C-24- $\varnothing$	MX 7334T-G5-TW9C-36- $\varnothing$
$\varnothing$ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DB / DD			
Accessories : viii			

### Xicato

2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	15°	24°	36°
Square (1 Head)	MX 7634S-G6-09OBTWC-15- $\varnothing$	MX 7634S-G6-09OBTWC-24- $\varnothing$	MX 7634S-G6-09OBTWC-36- $\varnothing$
Square (2 Heads)	MX 7634D-G6-09OBTWC-15- $\varnothing$	MX 7634D-G6-09OBTWC-24- $\varnothing$	MX 7634D-G6-09OBTWC-36- $\varnothing$
Square (3 Heads)	MX 7634T-G6-09OBTWC-15- $\varnothing$	MX 7634T-G6-09OBTWC-24- $\varnothing$	MX 7634T-G6-09OBTWC-36- $\varnothing$
$\varnothing$ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DA / DC			
Accessories : viii			

## Multi Box Life Adjustable



### Standard


2700-6500K / CRI 90		
7.2W / 975lm / 400mA		
	15°	36°
MX 7615-G6-TW9C-15- $\varnothing$	MX 7615-G6-TW9C-24 $\varnothing$	MX 7615-G6-TW9C-36- $\varnothing$
$\varnothing$ 82 (White Body & Black Reflector) / 84 (White Body & Silver Reflector) / 12 (Black Body & Reflector) / 14 (Black Body & Silver Reflector)		
Driver : DB / DD		
Accessories : viii		

### Xicato

2700-6000K / CRI 95		
7W / 614lm / 200mA		
	15°	36°
MX 7615-G6-09OBTWC-15- $\varnothing$	MX 7615-G6-09OBTWC-24 $\varnothing$	MX 7615-G6-09OBTWC-36- $\varnothing$
$\varnothing$ 82 (White Body & Black Reflector) / 84 (White Body & Silver Reflector) / 12 (Black Body & Reflector) / 14 (Black Body & Silver Reflector)		
Driver : DA / DC		
Accessories : viii		




Multi Box Mini Square (2 Heads)

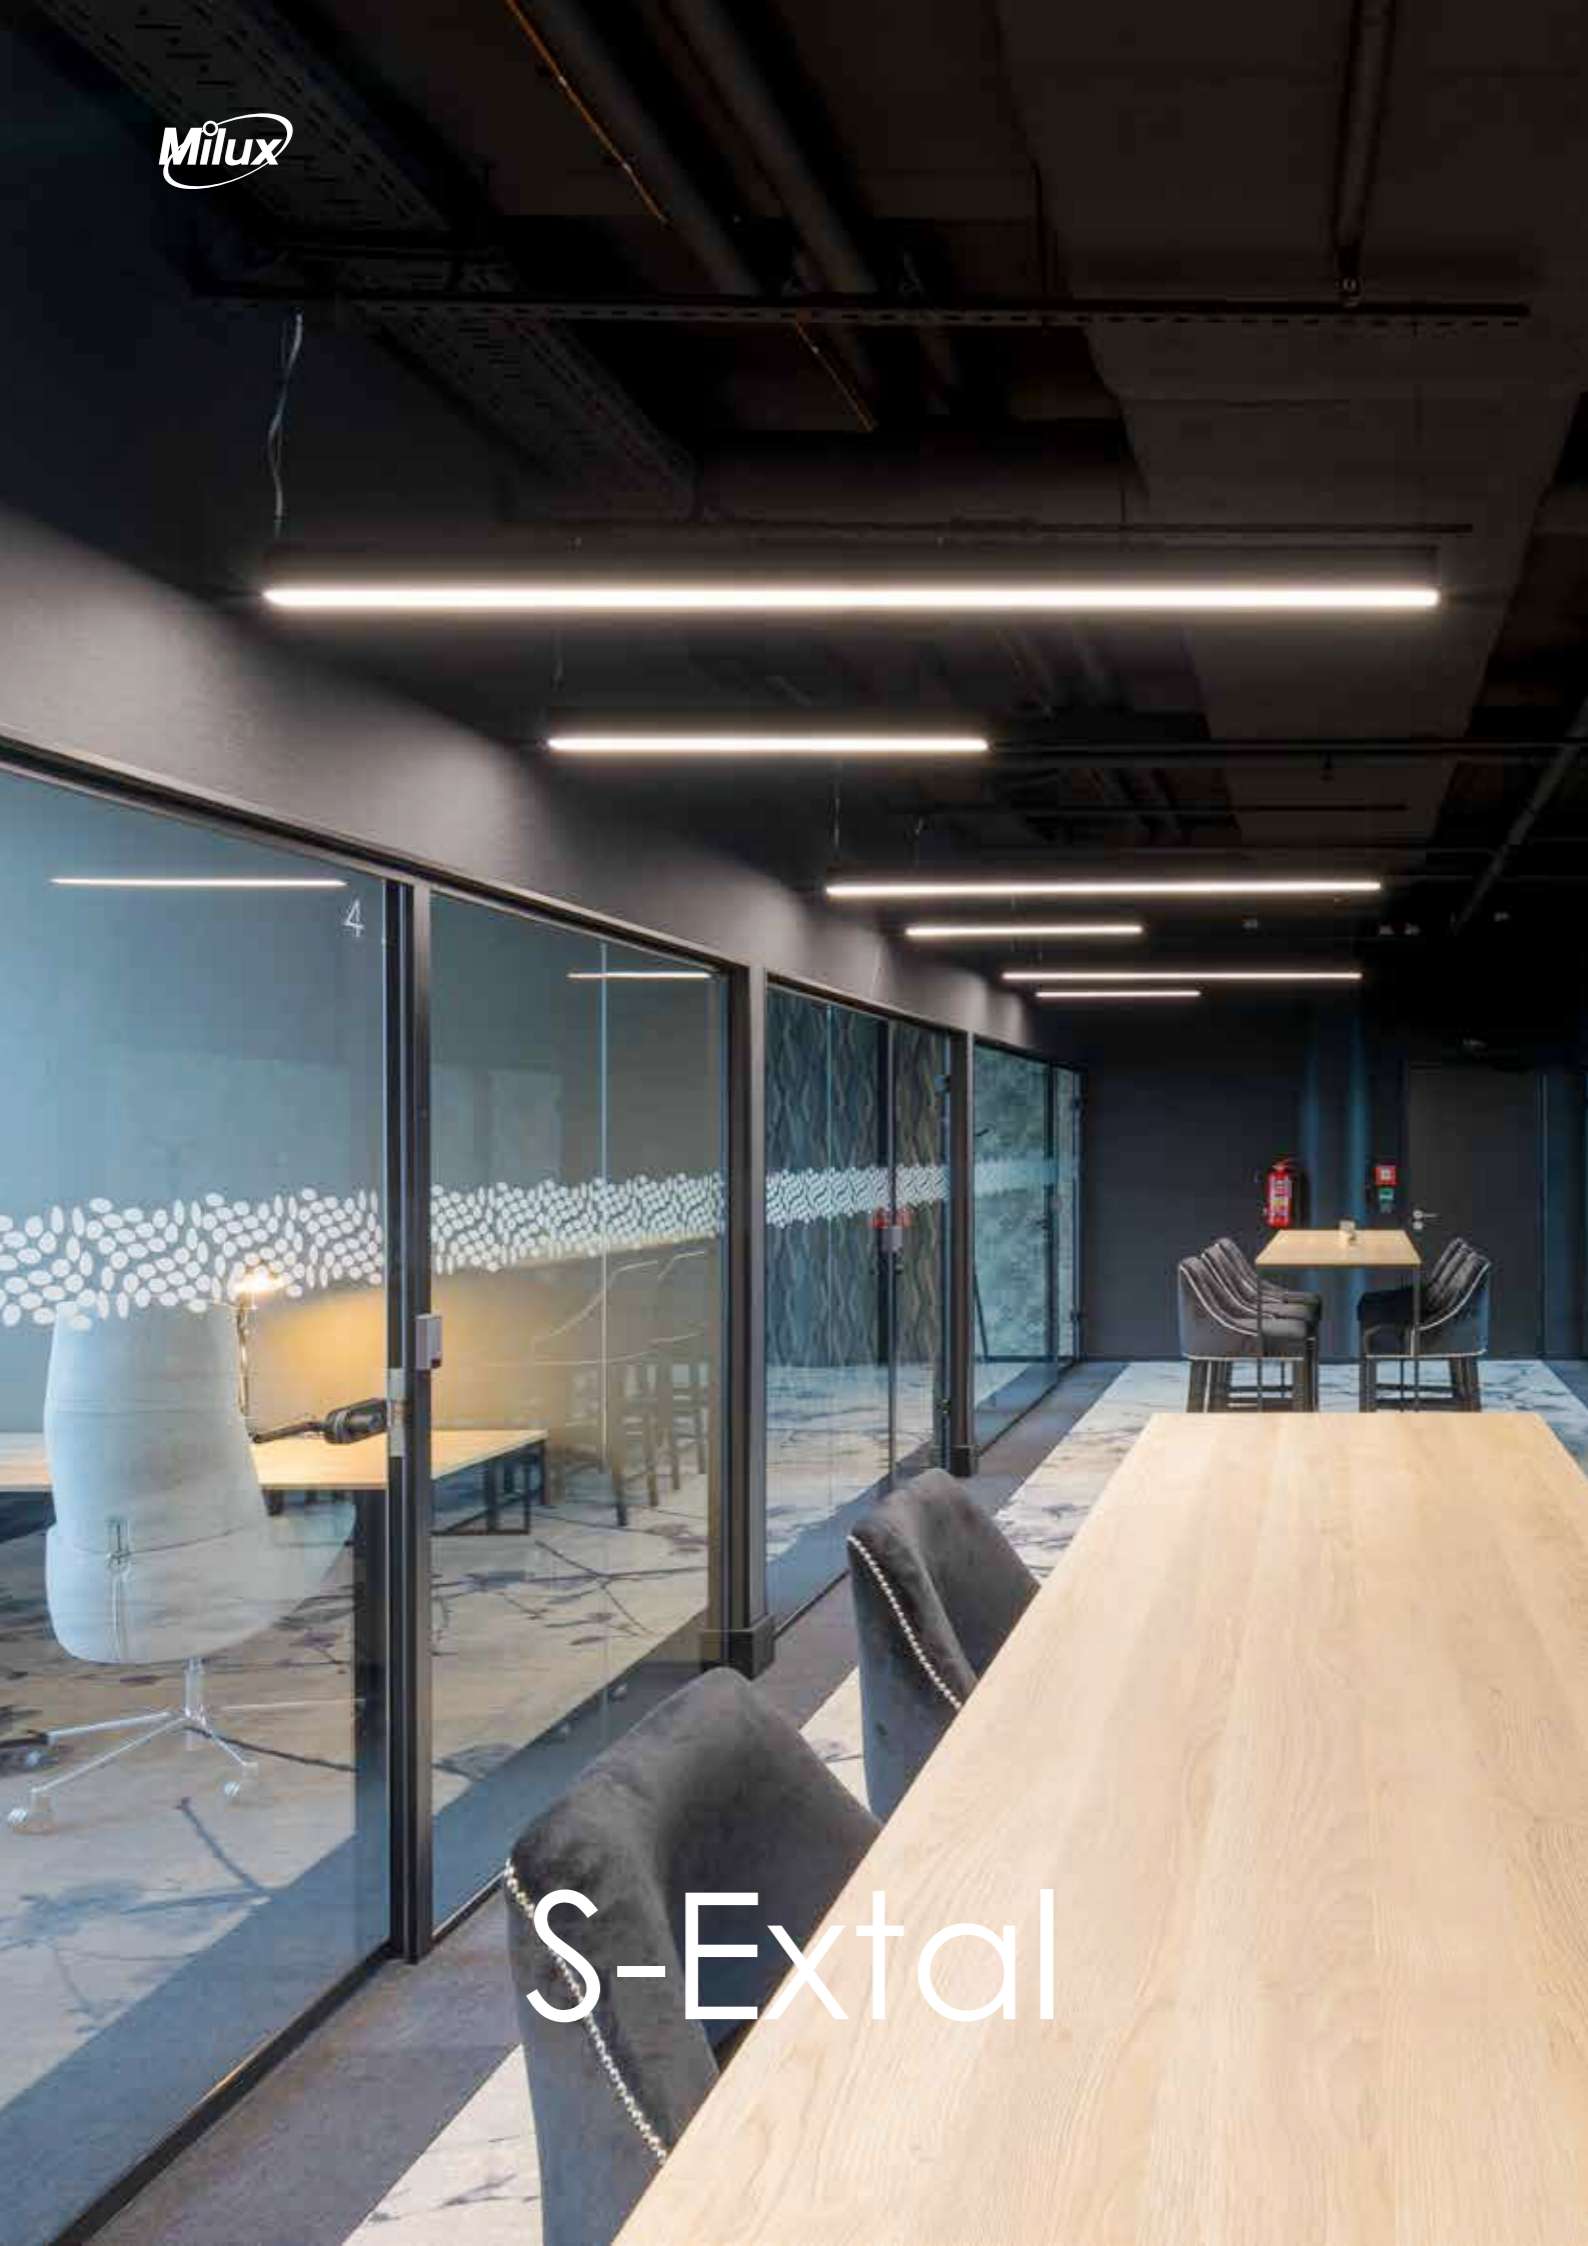


# S-Extal


## S-Extal



L 600mm



L 900mm




L 1200mm

	2700-6500K / CRI 90		
	13W / 1400lm / 24V	19W / 2100lm/ 24V	25W / 2800lm/ 24V
L 600mm	MX 5508D9P-G3-TW-600- $\varnothing$	-	-
L 900mm	-	MX 5508D9P-G3-TW-900- $\varnothing$	-
L 1200mm	-	-	MX 5508D9P-G3-TW-1200- $\varnothing$
$\varnothing$ B (Black) / W (White)			
Driver : DE / DF / DG			




S-Extal

For further details, please refer to page 148 - 149

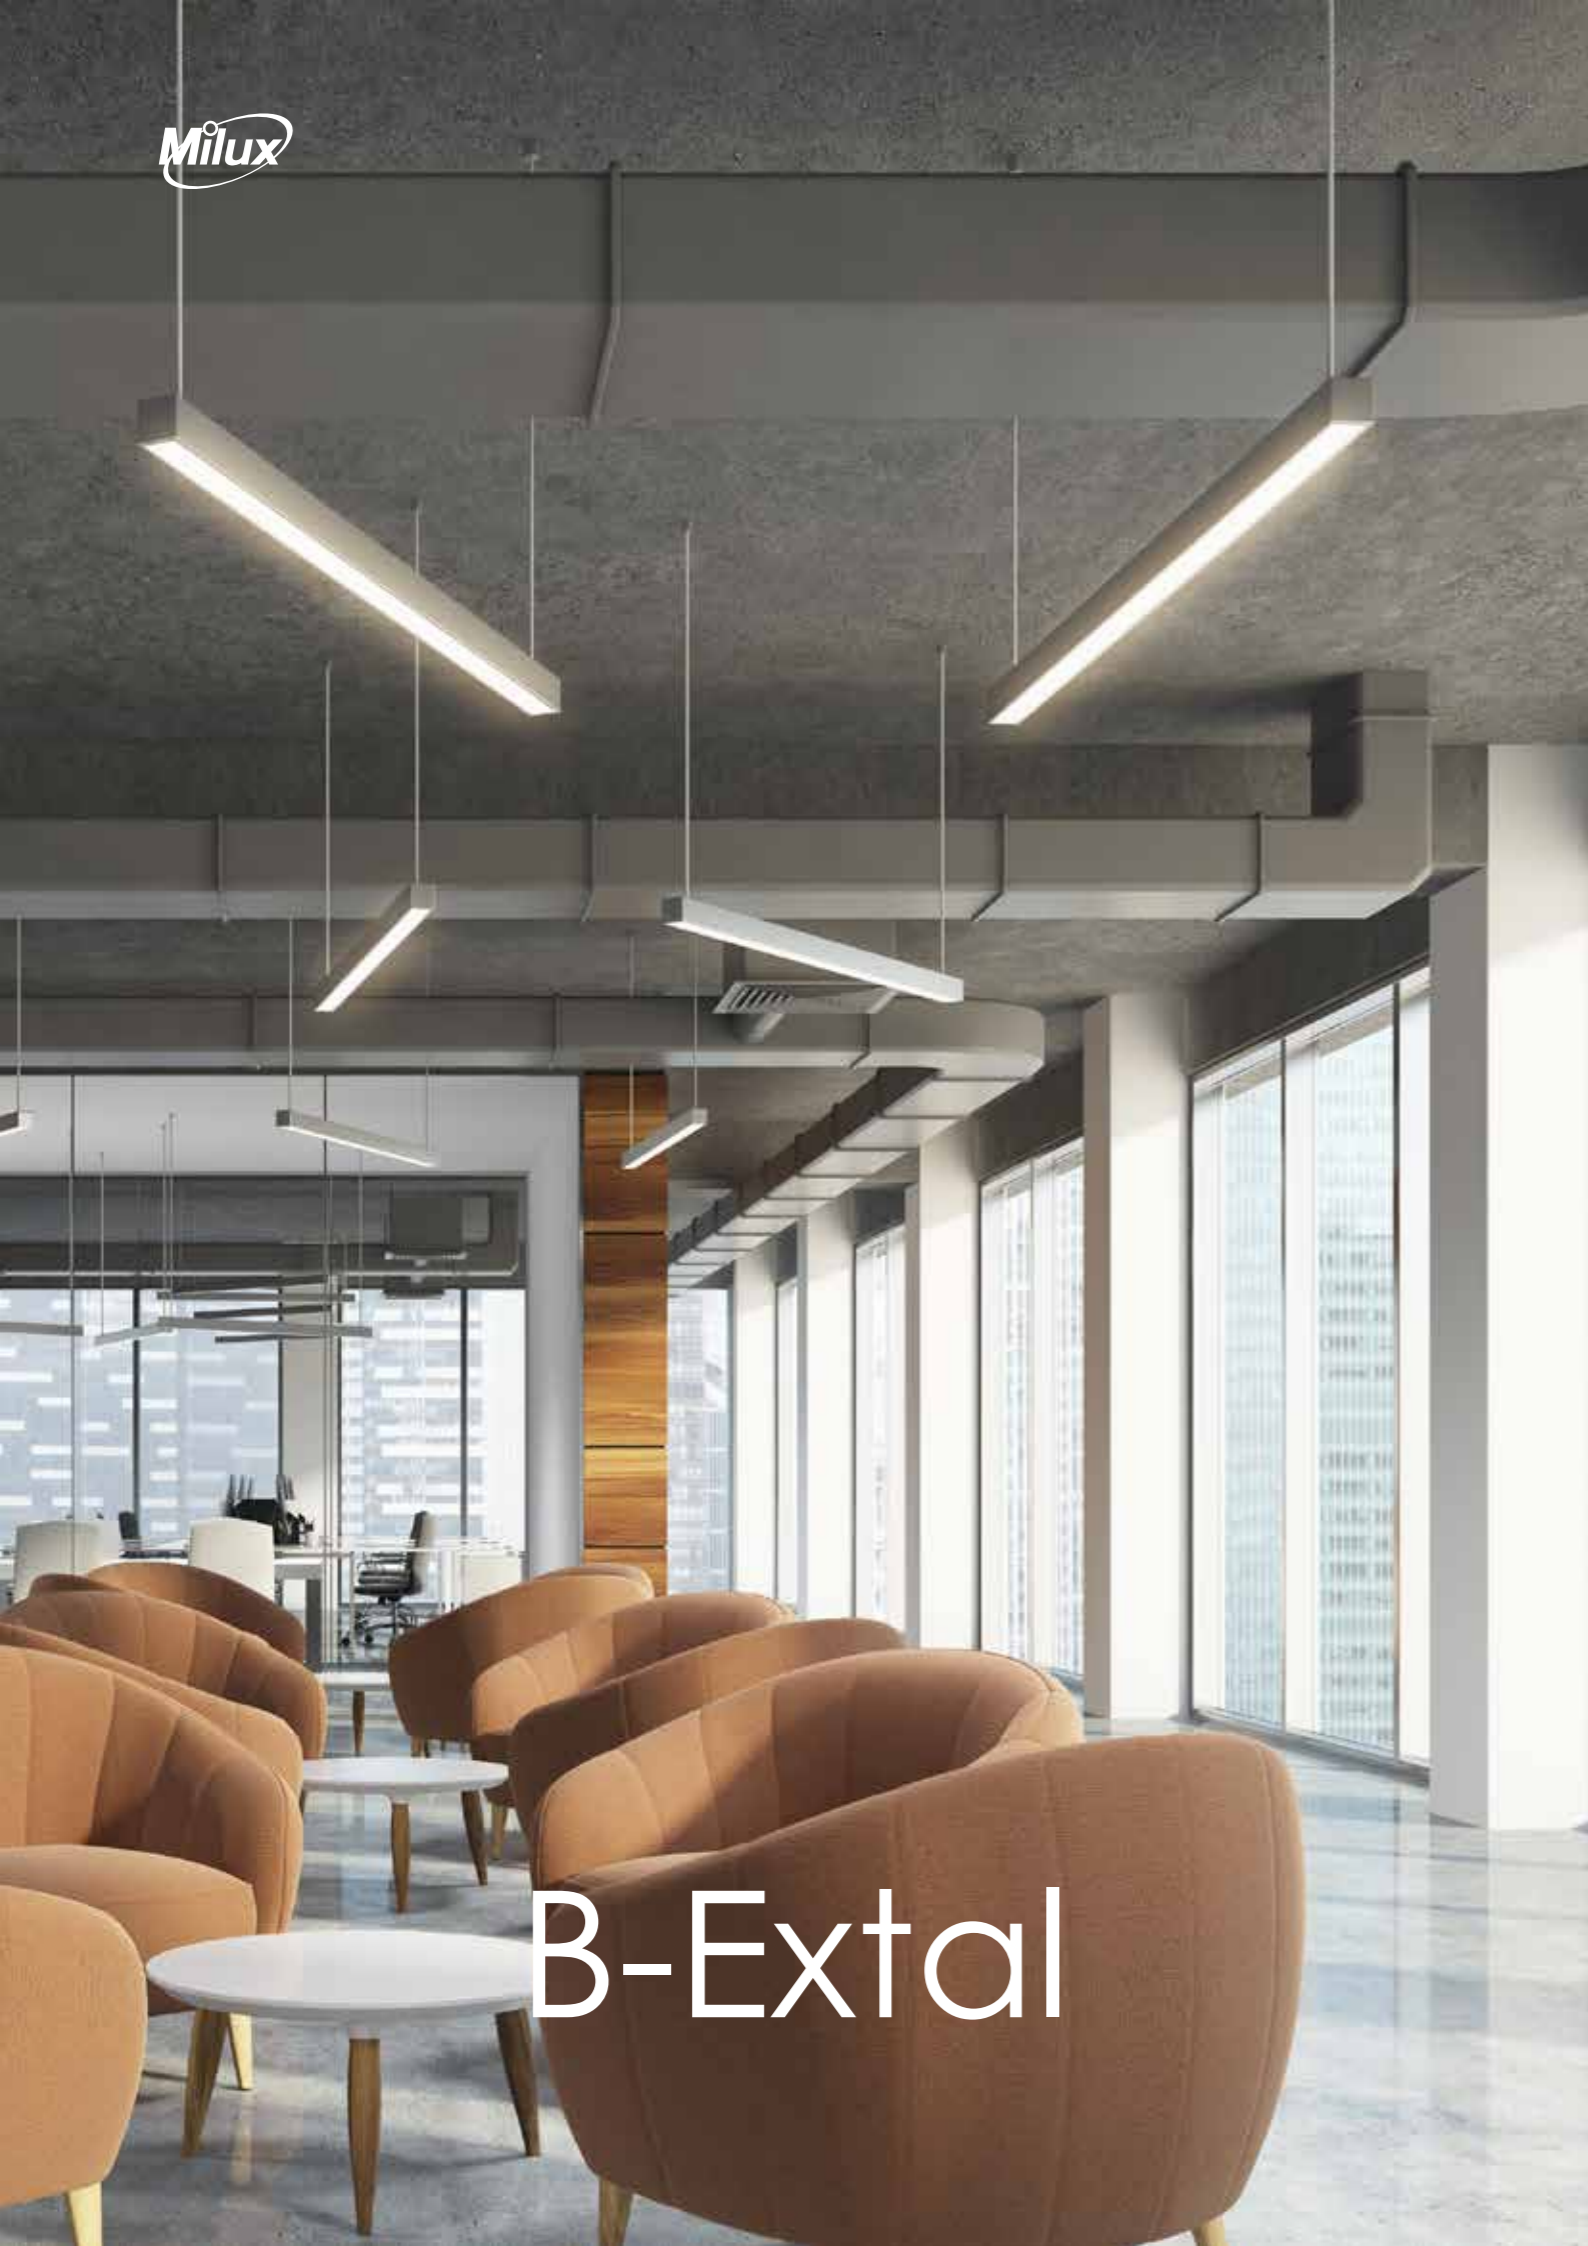


# B-Extal


## B-Extal



L 600mm



L 900mm



L 1200mm

	2700-6500K / CRI 90		
	13W / 1400lm / 24V	19W / 2100lm/ 24V	25W / 2800lm/ 24V
L 600mm	MX 5510D9P-G3-TW-600- $\varnothing$	-	-
L 900mm	-	MX 5510D9P-G3-TW-900- $\varnothing$	-
L 1200mm	-	-	MX 5510D9P-G3-TW-1200- $\varnothing$
$\varnothing$ B (Black) / W (White)			
Driver : DE / DF / DG			



B-Extal


For further details, please refer to page 148 - 149






# LED Strip Dual

## LED Strip Dual (5M)



2700-4000K / CRI 90
13.2W/m / 1450lm/m / 12V
MX 6463-92740K-12V-5000
Driver : DE / DF / DG
<i>* Custom made power and length upon request</i>

## LED Strip Dual IP65 (5M)



2700-4000K / CRI 90
13.2W/m / 1450lm/m / 12V
MX 6464-92740K-12V-5000
IP65
Driver : DE / DF / DG
<i>* Custom made power and length upon request</i>



LED Strip Dual



LED Strip Dual (IP65)

For further details, please refer to page 148 - 149

# Appendix

Driver Information | Luminaire Components | Accessories |  
Light Bulb | Ceiling Canopy Kits

# Driver Information

	Product	Product Code	Watt	Size
<b>DA</b>	LED POWER SUPPLY 120mA - 350mA Dali TW	EC-LED-SETmA-12Da-TW-EU(41)	12W	43mm (W) x 150mm (L) x 29mm (H)
<b>DB</b>	LED POWER SUPPLY 350mA - 700mA Dali TW	EC-LED-SETmA-20Da-TW-EU(41)	20W	43mm (W) x 150mm (L) x 29mm (H)
<b>DC</b>	LED POWER SUPPLY 120mA - 350mA 1-10V TW	EC-LED-SETmA-12D-TW-EU(41)	12W	43mm (W) x 150mm (L) x 29mm (H)
<b>DD</b>	LED POWER SUPPLY 350mA - 700mA 1-10V TW	EC-LED-SETmA-20D-TW-EU(41)	20W	43mm (W) x 150mm (L) x 29mm (H)
<b>DE</b>	LED POWER SUPPLY 12V 60W Dali TW	EC-LED-12V-75D-TW-EU(38)	60W	40mm (W) x 295mm (L) x 32mm (H)
<b>DF</b>	LED POWER SUPPLY 12V 150W Dali TW	EC-LED-12V-150D-TW-EU(38)	120W	40mm (W) x 360mm (L) x 32mm (H)
<b>DG</b>	LED POWER SUPPLY 12V 150W 1-10V TW	EC-LED-12V-150D-TW-LH(41)	120W	43mm (W) x 352mm (L) x 30mm (H)
<b>DH</b>	LED POWER SUPPLY 500mA-DC 2CH TW DIM5	21012 0355	20W	79mm (W) x 111mm (L) x 24mm (H)
<b>DI</b>	LED POWER SUPPLY 48V-DC / 100W DIN	300 89 48 100	100W	55mm (W) x 100mm (L) x 90mm (H)
<b>DJ</b>	LED POWER SUPPLY 48V-DC / 240W DIN	300 89 48 240	240W	63mm (W) x 114mm (L) x 125mm (H)

# Luminaire Components


	Accessory	Product Code	Colour Option
<b>IA</b>	Mounting Kit Entero RD-S O.F.A	28400 0010	
<b>IB</b>	Mounting Kit Entero SQ-S O.F.A	28400 0040	
<b>IC</b>	Mounting Kit Entero RD-M O.F.A	28400 0020	
<b>ID</b>	Mounting Kit Entero SQ-M O.F.A	28400 0050	
<b>IE</b>	Mounting Kit Entero RD-L O.F.A	28400 0030	
<b>IF</b>	Mounting Kit Entero SQ-L O.F.A	28400 0060	
<b>IG</b>	Mounting Kit Spy 39/52 Trimless O.F.A.	15212 2030	
<b>IH</b>	SPY 52 Tube	19810 0100 ◊	◊ B (Black) / FBR (Flemish Bronze) / FG (Flemish Gold) / GC (Gold Colored) / W (White)
<b>II</b>	SPY 66 Tube	24611 0100 ◊	◊ B (Black) / FBR (Flemish Bronze) / FG (Flemish Gold) / GC (Gold Colored) / W (White)
<b>IJ</b>	SPY90 Tube	19810 0170 ◊	◊ B (Black) / FBR (Flemish Bronze) / FG (Flemish Gold) / GC (Gold Colored) / W (White)
<b>IK</b>	Trimless Installation Kit	MX TIK41LT ◊	◊ 00B (Black) / 80W (White)

# Accessories

Collection	Accessory	Product Code	Colour Option	Remark
i	Entero S Glass SBL	28500 0040		
	Entero S Honeycomb Double Use	28500 0060 ◊	◊ B (Black)	Not Available for Entero Small X
	Entero S Honeycomb Single Use	28500 0050 ◊	◊ B (Black)	
	Entero S Linear Spread Lens	28500 0010		
	Entero S Softening Lens	28500 0030		
	Entero S Spread Lens	28500 0020		
ii	Entero M Glass SBL	28500 0010		
	Entero M Honeycomb Double Use	28500 0120 ◊	◊ B (Black)	Not Available for Entero Medium X
	Entero M Honeycomb Single Use	28500 0110 ◊	◊ B (Black)	
	Entero M Linear Spread Lens	28500 0070		
	Entero M Softening Lens	28500 0090		
iii	Entero M Spread Lens	28500 0080		
	Entero L Glass SBL	28500 0160		
	Entero L Honeycomb Double Use	28500 0180 ◊	◊ B (Black)	Not Available for Entero Large X
	Entero L Honeycomb Single Use	28500 0170 ◊	◊ B (Black)	
	Entero L Linear Spread Lens	28500 0130		
iv	Entero L Softening Lens	28500 0150		
	Entero L Spread Lens	28500 0140		
	HONEYCOMB 42 SINGLE USE	19810 0010 ◊	◊ B (Black)	
	SPREAD LENS 42	19810 0030		
	LINEAR SPREAD LENS 42	19810 0020		
	SOFTENING LENS 42	19810 0040		
	GLASS SBL 42	19810 0050		
v	HONEYCOMB 57 SINGLE USE	24611 0150 ◊	◊ B (Black)	
	HONEYCOMB 57 DOUBLE USE	24611 0210 ◊	◊ B (Black)	
	SPREAD LENS 57	24611 0200		
	LINEAR SPREAD LENS 57	24611 0170		
	SOFTENING LENS 57	24611 0190		
vi	GLASS SBL 57	24611 0160		
	HONEYCOMB 75 SINGLE USE	19810 0110 ◊	◊ B (Black)	
	HONEYCOMB 57 DOUBLE USE	19810 0120 ◊	◊ B (Black)	
	SPREAD LENS 57	24611 0200		
	LINEAR SPREAD LENS 57	24611 0170		
vii	SOFTENING LENS 57	24611 0190		
	GLASS SBL 57	24611 0190		
	Connection ST	15225 0360 ◊	◊ B (Black) / W (White)	
	Suspension ST	15225 0340 ◊	◊ B (Black) / W (White)	
	Cable Base R	203 99 55 ◊	◊ ANO (Anodised) / B (Black) / W (White)	
	Coverset R 62	204 00 62 ◊	◊ ANO (Anodised) / B (Black) / W (White)	
viii	Coverset R 90	204 00 90 ◊	◊ ANO (Anodised) / B (Black) / W (White)	
	Coverset R 120	204 00 100 ◊	◊ ANO (Anodised) / B (Black) / W (White)	
	Frosted Glass Diffuser	MX 9924		
	Obscured Glass Diffuser	MX 9925		
ix	Linear Spread Glass Diffuser	MX 9958		
	Black Honey Comb Lourve	MX 9955		
	Frosted Glass Diffuser	MX 9980		
	Obscured Glass Diffuser	MX 9981		
	Linear Spread Glass Diffuser	MX 9982		
	Black Honey Comb Lourve	MX 9983		


# Light Bulb

## E14 Smart White

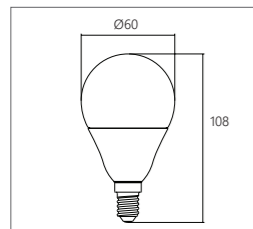


CC-1016964
CRI 95
2200-4500K
8W
560lm

## E27Smart White



LD-E27TW-CAS
CRI 95
2200-6500K
8W
640lm


## E27 RGB + TW

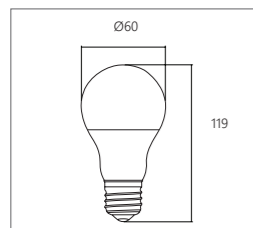

LD-E27RGBCW-CAS
CRI 95
2200-6500K and RGB
8W
640lm


# Ceiling Canopy Kits

## Single Mini



R02L01 ∅00
∅ 10 (Matte White) / 20 (Matte Black) / 35 (Coppery Bronze) / 40 (Chrome) / 45 (Matte Champagne)
*more options on request

## 3 Light Round



R04L03 ∅00
∅ 10 (Matte White) / 20 Matte White)
*more options on request

# *Zodiac* 歷程照明有限公司 ZODIAC LIGHTING LIMITED

## Head Office - Project Team

1801, 18/F, Hong Man Industrial Centre, 2 Hong Man Street,  
Chai Wan, Hong Kong.  
香港柴灣康民街2號康民工業中心18樓1801室  
Tel: (852) 2898 9023 Fax: (852) 2558 3114  
E-mail: mail@zodiaclighting.com

## Showroom

### *Zodiac*

G/F & 1/F, Amber Commercial Building, 70-74 Morrison Hill Road,  
Wan Chai, Hong Kong.  
香港灣仔摩利臣山道70-74號凱利商業大廈地下及一樓  
Tel: (852) 2882 9082 Fax: (852) 2504 4466  
E-mail: showroom-1t@zodiaclighting.com

### *Zodiac* 樓下

G/F, Tak On Mansion, 32 Morrison Hill Road,  
Wan Chai, Hong Kong.  
香港灣仔摩利臣山道32-34號德安樓地下  
Tel: (852) 2832 9987 Fax: (852) 2834 9687  
E-mail: showroom-mh@zodiaclighting.com

***www.zodiaclighting.com***

## Specification

For continuous product development, the company reserves the right to amend, totally or partially, any specification herein detailed without prior notice.

## Photometric data

The illuminance value and cone performance state in the photometric data is for reference only. Actual execution should affect by real situation.