


Zodiac

A
New
Lighting
Trend

T
U
N
A
B
L
E
.
W
H
I
T
E

Human Centric Lighting (HCL)

Human beings and their concerns have become increasingly important. Lighting supports this trend with groundbreaking concepts for Human Centric Lighting (HCL), which focus on humans and the optimal light for their needs. The interplay of light and room climate creates an atmosphere that has a positive impact on the well-being of humans as well as on their productivity and health.

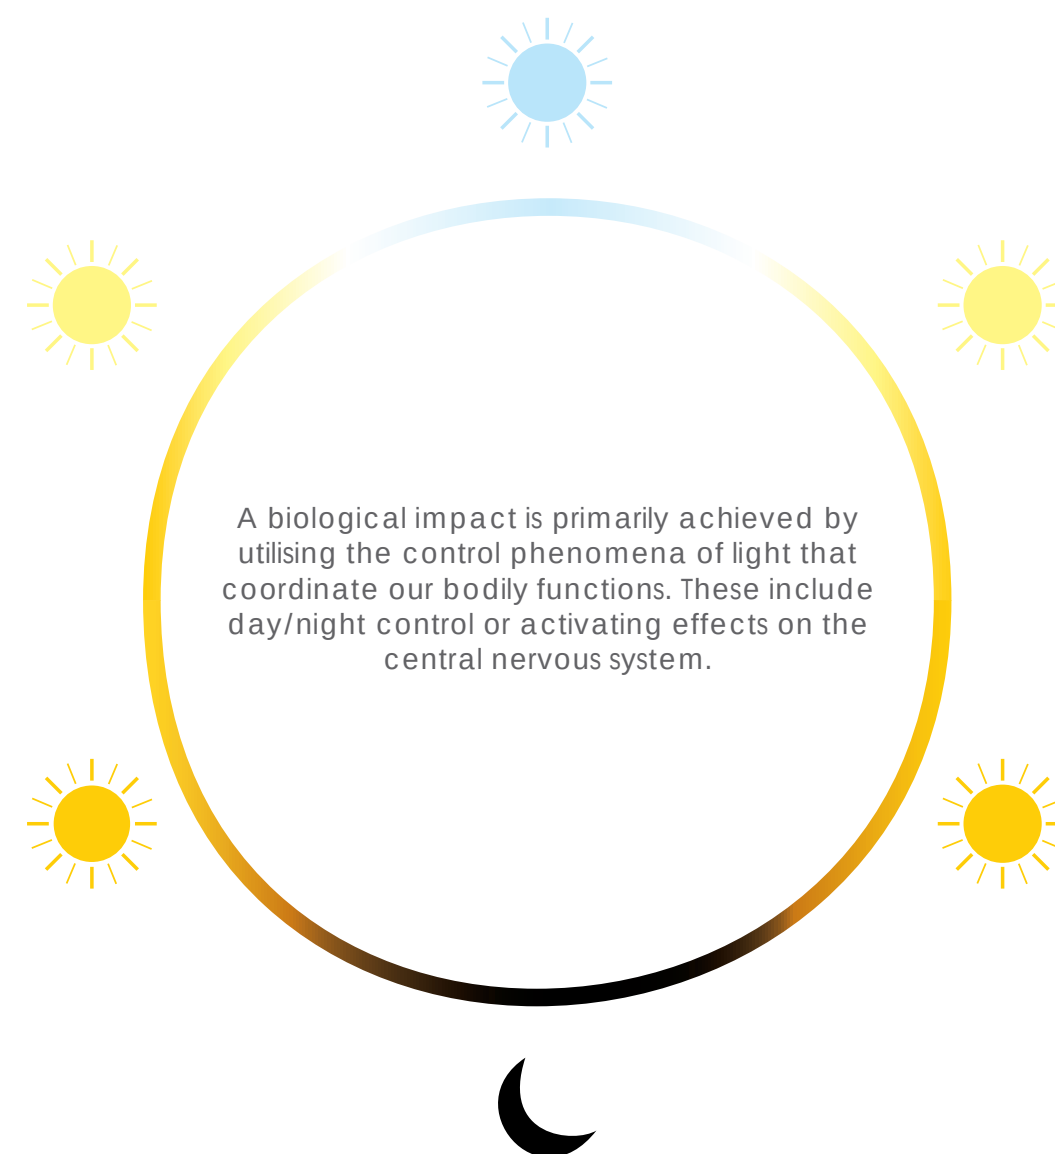

Tunable White vs HCL


Tunable White is about the personal comfort of the individual; HCL focuses on the biological impact.

Tunable White provides the technological opportunity to plan HCL solutions in the best possible way.



Tunable White

Seamlessly adjustable colour temperatures, from cool white to warm white, bring natural lighting effects, with all of the associated advantages, from outside to inside, and make it possible to properly target individual needs and situations.

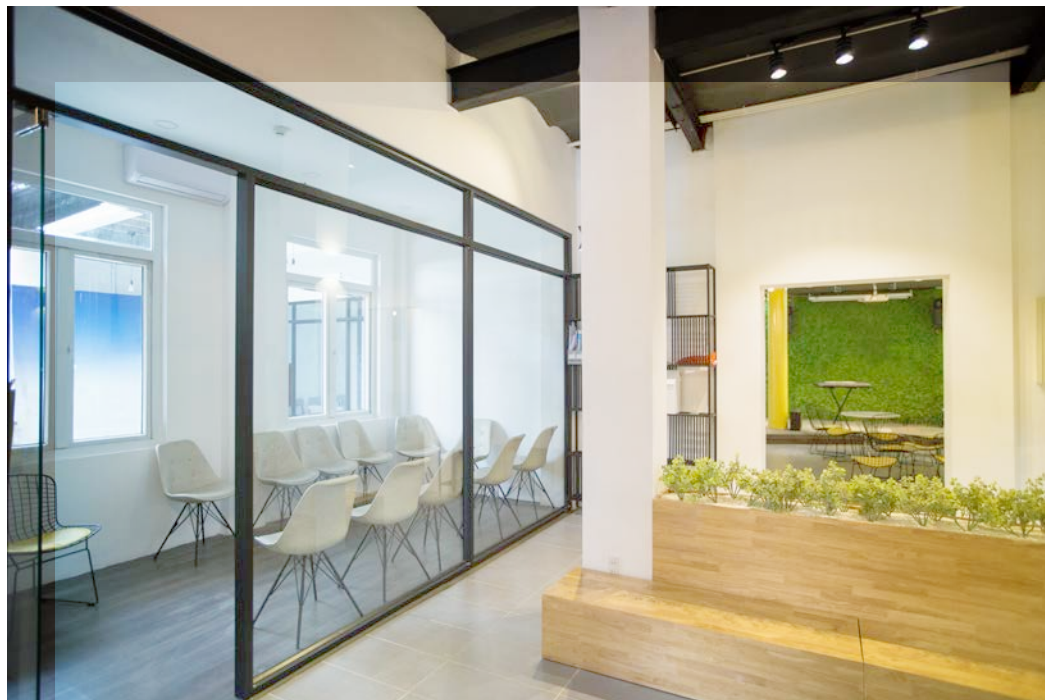

On Human Body

Cool white light with a high proportion of blue light has a stimulating effect and promotes concentration, whereas warm white light is calming. Therefore, Tunable White creates an environment that helps us in a natural way.

By simulating the impact of natural daylight, biologically effective artificial light synchronises humans with the outside world. dynamic lighting solutions simulating the natural course of daylight significantly improve concentration and productivity as well as alertness and quality of sleep.

On Environment/ Object

Colour Temperatures give rooms a characteristic atmosphere and underline the beauty and brilliance of different object and surfaces. With the right light spectrum, colours can be emphasised and powerfully presented.

Tunable White not only reproduces colours authentically, but its effects can be further amplified using the right colour temperature. The flexible adjustment of Tunable White also makes it easy to test how products look in different lighting moods.

Application Of Tunable White



Morning
09:00



Afternoon
12:00



Evening
18:00

Residential

Work-from-Home become a new trend. Easily to switch relaxing mode to the working mode, or reverse, by using Tunable White technology.



Hospital

Increase the speed of recovery.

Lighting researchers, hospitals, and senior living facilities are examining the potential for Tunable White - induced circadian stimulus to enhance comfort, accelerate healing, increase wakefulness during the day and increase hours of continuous sleep at night.



Morning
09:00



Afternoon
12:00



Evening
18:00

Office / Commerical

Higher Productivity during working hours (5000K from 9:00 a.m. to 5:00 p.m.) and relax atmosphere (2700K after 5:00 p.m.) after working hours.

A warm room with gentle, reduced light promotes the generation of ideas.



Retail


Change CCT to fit for season sales (Summer Time → Energetic ; Winter Time → Glamorous / Elegant). Retailers are examining the potential for increased sales and foot traffic based on tuning the light. It might also be used as an “alert” function. For example, some change in light level and Colouration might precede an announcement about specific sale items.



Tunable White Control System



LUTRON, a global organisation that is committed to delivering value to its customers. An innovative lighting controls for homes and commercial spaces of every type and style.

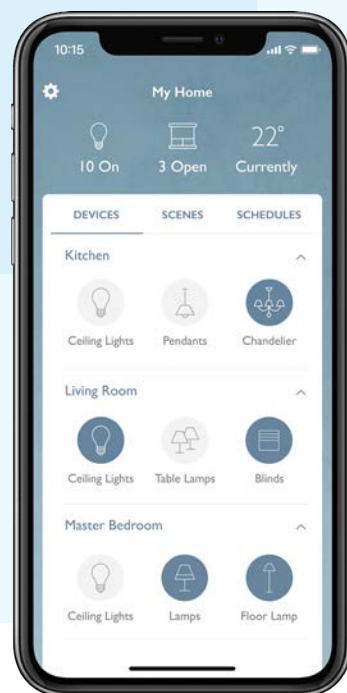

Control: Wireless Control / 1 Channel / 2 Channel

Key Features:


Light Control - Create just the right light for any activity or set moods in specific areas of your home – all at the touch of a button.

Blind Control - Use the sun to your advantage with automated blinds. Convert harsh glare into soft, pleasing light, while preserving your view.

Temperature Control - Adjust heating or cooling systems any time of day, even while you're away from home.

Audio Control - Fill a room with great sounding music.

Keypad:



Palladiom™



SeeTouch™



Pico



CASAMBI

A clear leader in modern wireless lighting control solutions based on Bluetooth Low Energy. Key aspects of the Casambi solution are great user experience, high performance and scalability.



Installation: Wireless


Key Features:

Light Control by Bluetooth - Provides a mesh network where all the intelligence of the system is replicated in every node and, in such a way, creates a system with no single points of failure.

Minimal Costs - Works with any manufacturer's range of existing luminaires, creating an optimal solution in terms of ease of installation and functionality with minimal additional hardware and deployment costs.

User Interfaces - Casambi offers a big variety of possibilities for a user to interact with the lighting such as smartphones, tablets and smartwatches.

Keypad:



Xpress

Tunable White Lighting Product

Decorative | Architectural




DECORATIVE




Ginkgo

Ginkgo



S40 (SMALL)




S50 (LARGE)

E27 Pendant Lamp		
E27 / 220-240V		
Small		Large
740316		740326
Matt Brown / Matt Pink / Matt Blue		
*more colours on request		



Pluma



E27 Floor Lamp

E27 / 220-240V


P-2959

Ø 64 (Black) / 27 (White)

Pluma



Saya

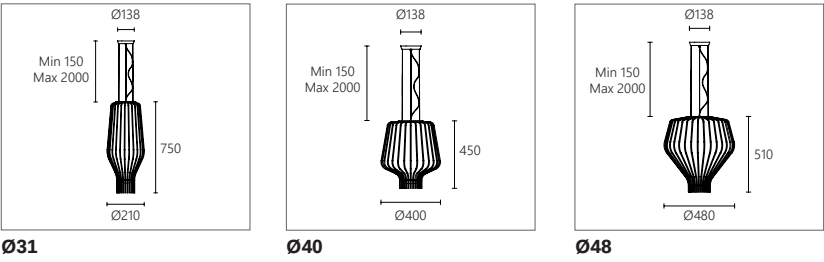


E27 Pendant Lamp

E27 / 220-240V		
Ø31	Transparent	White
	F47 AØ00	F47 AØ01
Ø40	Transparent	White
	F47 AØ00	F47 AØ01
Ø48	Transparent	White
	F47 AØ00	F47 AØ01
Ø17 (Burnished metal structure) / 19 (Chrome-plated metal structure) / 25 (Gold-plated metal structure)		
Ø09 (Burnished metal structure) / 11 (Chrome-plated metal structure) / 21 (Gold-plated metal structure)		
Ø13 (Burnished metal structure) / 15 (Chrome-plated metal structure) / 23 (Gold-plated metal structure)		

Saya



Diabolo




E27 Pendant Lamp

E27 / 220-240V
F21210 ☐
☐ 09 (White) / 26 (Beaver Brown) / 35 (Cherry Red)

Diabolo



Spun

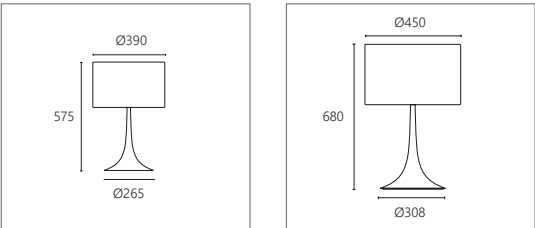

SMALL

LARGE

E27 Table Lamp

E27 / 220-240V	
1 (Small)	2 (Large)
F66100 	F66110 
09 (White) / 30 (Black)	




Spun





Sunrise



E27 Table Lamp

3 x E27 / 220-240V						
Colour	Satin Brass	Matt Black	Matt White	Matt Nickel	Chrome	Bronze
	12740 01◊	12740 10◊	12740 14◊	12740 16◊	12740 02◊	12740 05◊
shade	◊* 301 (White) / 310 (Crème) / 377 (Brown)					

**more colours and shades on request*




Sunrise

LODES



Jim

Jim




E27 Pendant Lamp

E27 / 220-240V				
Hook	Outer diffuser / Outer layer	Matte White	Matte Black	Matte Champagne
	Grey	1692 $\varnothing$ 2300	1692 $\varnothing$ 2800	1692 $\varnothing$ 2700
	Honey	1692 $\varnothing$ 6300	1692 $\varnothing$ 6600	1692 $\varnothing$ 6500
	Turquoise	1692 $\varnothing$ 8200	1692 $\varnothing$ 8500	1692 $\varnothing$ 8400
$\varnothing$ 1 (Bell) / 2 (Cone) / 3 (Cylinder) / 4 (Dome)				
Coppery Bronze				
		1692 $\varnothing$ 2400	1692 $\varnothing$ 6400	1692 $\varnothing$ 8300




VIBIA

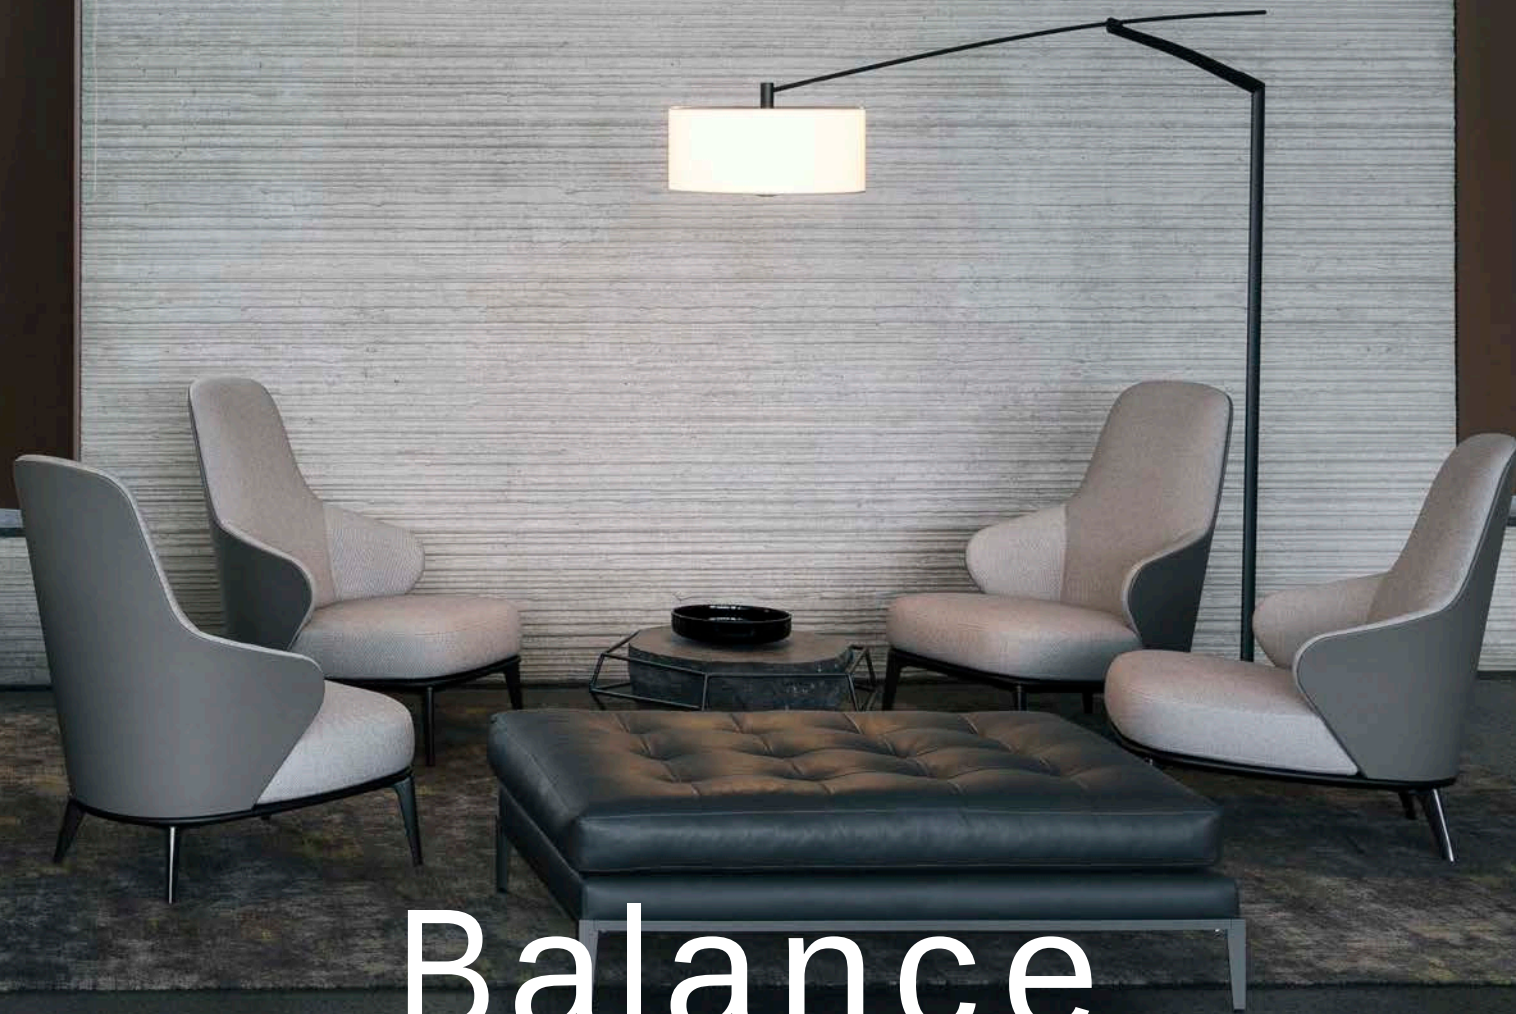


Balance

Balance



SMALL



LARGE


E27 Floor Lamp		
3 x E27 / 220-240V		
Cotton finish diffuser	Small	Large
	5191 $\varnothing$	5190 $\varnothing$
$\varnothing$ 01 (Chrome) / 30 (Nickel)		
Aluminum weft diffuser	5192 $\varnothing$	5189 $\varnothing$
	$\varnothing$ 01 (Chrome) / 18 (Graphite) / 30 (Nickel)	




VIBIA

Jazz

Jazz



SMALL



LARGE


E27 Pendant Lamp		
E27 / 220-240V		
Small		Large
1338	☞	1336
☞ 10 (White) / 45 (Blue) / 25 (Beige)		





T1 Side Table

T1 Side Table

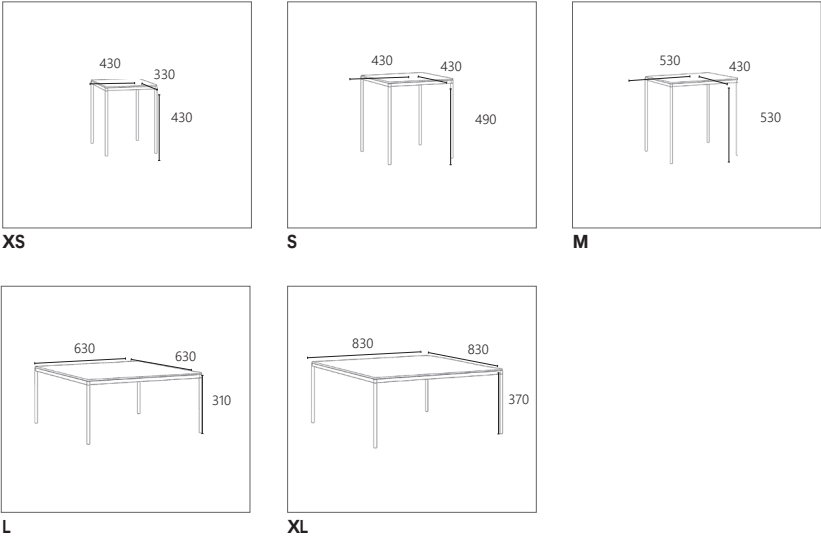


Luminous table	
	Casambi / 220-240V
	Aicci T1 ☞ Table
	☞ XS / S / M / L / XL





ARCHITECTURAL

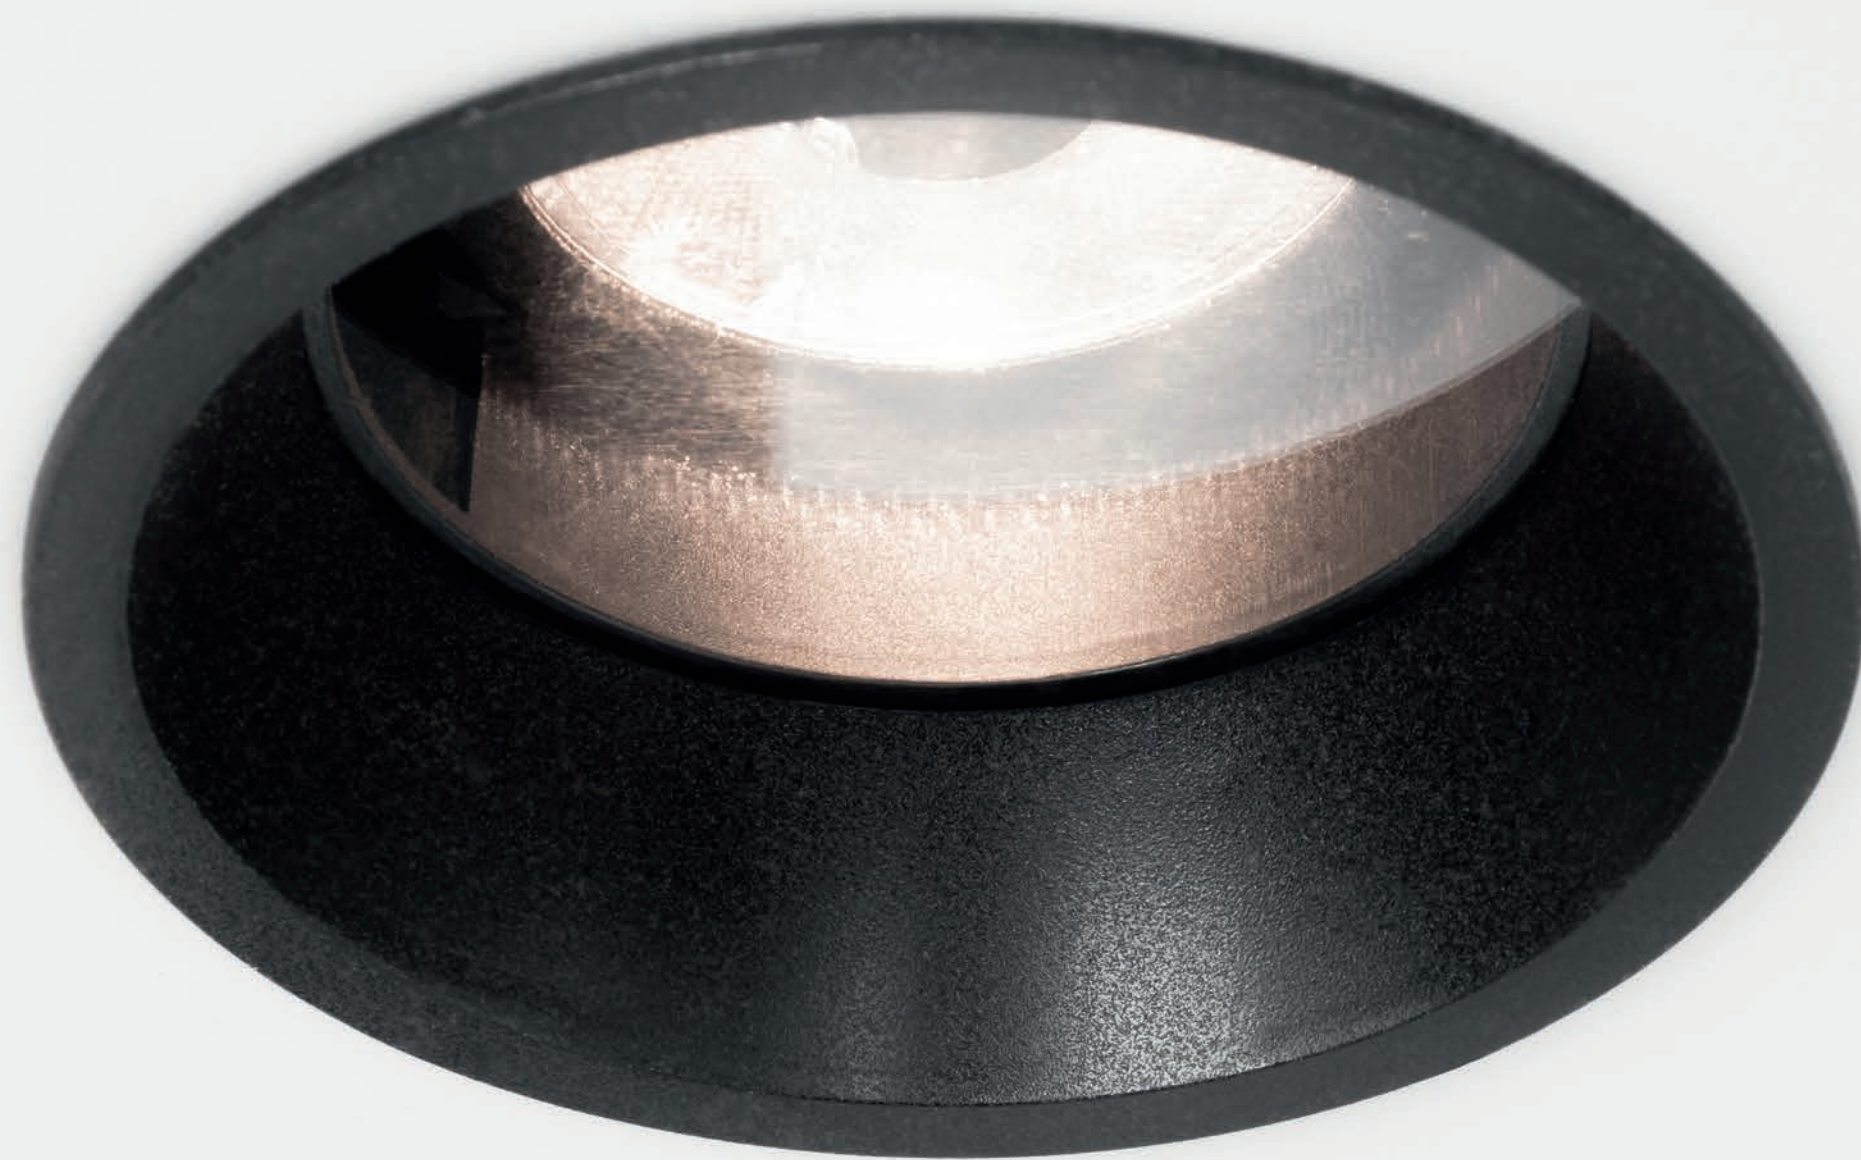

DELTA LIGHT®

Entero Collection






ENTERO ROUND SMALL TRIMLESS IP




ENTERO SQUARE SMALL TRIMLESS IP

Entero Small Trimless




ROUND
ØKIT




SQUARE
KIT

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28464 9020 ◊	28464 9030 ◊	28427 9020 ◊	28427 9030 ◊
Square	28564 9020 ◊	28564 9030 ◊	28527 9020 ◊	28527 9030 ◊
◊ B (Black) / GC (Gold Colour) / W (White)				
Driver : DH				
Compulsory : IA (Round) / IB (Square)				
Accessories : i				

Entero Small Trimless Wallwash




ROUND WALLWASH
ØKIT




SQUARE WALLWASH
KIT


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28465 9000 ◊		28466 9000 ◊	
Square	28565 9000 ◊		28566 9000 ◊	
◊ B (Black) / GC (Gold Colour) / W (White)				
Driver : DH				
Compulsory : IA (Round) / IB (Square)				

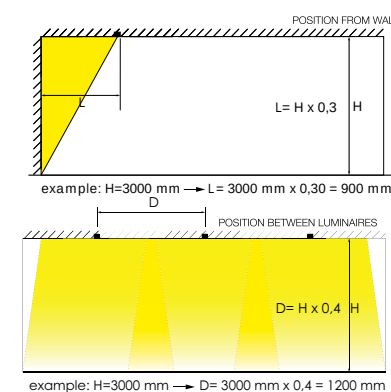

Entero Small Trimless IP




ROUND IP
ØKIT




SQUARE IP
KIT

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28472 9020 ◊	28472 9030 ◊	28452 9020 ◊	28452 9030 ◊
Square	28572 9020 ◊	28572 9030 ◊	28552 9020 ◊	28552 9030 ◊
◊ B (Black) / GC (Gold Colour) / W (White)				
IP44				
Driver : DH				
Compulsory : IA (Round) / IB (Square)				

Entero Small




ROUND
Ø76




SQUARE
76 x 76

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28456 9020 ☐	28456 9030 ☐	28404 9020 ☐	28404 9030 ☐
Square	28556 9020 ☐	28556 9030 ☐	28504 9020 ☐	28504 9030 ☐
☐ B (Black) / GC (Gold Colour) / W (White)				
Driver : DH				
Accessories : i				


Entero Small Wallwash



ROUND WALLWASH
Ø76




SQUARE WALLWASH
76 x 76

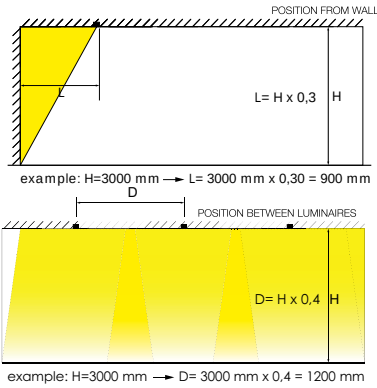


	1800-4000K / CRI 90	2700-6500K / CRI 90
	9W / 979lm / 500mA	9W / 1087lm / 500mA
Round	28457 9000 ☐	28458 9000 ☐
Square	28557 9000 ☐	28558 9000 ☐
☐ B (Black) / GC (Gold Colour) / W (White)		
Driver : DH		

Entero Small IP




ROUND IP
Ø76




SQUARE IP
76 x 76

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28459 9020 ☐	28459 9030 ☐	28408 9020 ☐	28408 9030 ☐
Square	28559 9020 ☐	28559 9030 ☐	28508 9020 ☐	28508 9030 ☐
☐ B (Black) / GC (Gold Colour) / W (White)				
IP44				
Driver : DH				

Entero Small X



ROUND
Ø76



SQUARE
76 x 76

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	20°	45°	20°	45°
Round	28470 9020 ☐	28470 9030 ☐	28441 9020 ☐	28441 9030 ☐
Square	28570 9020 ☐	28570 9030 ☐	28541 9020 ☐	28541 9030 ☐
☐ B (Black) / W (White)				
IP65				
Driver : DH				
Accessories : i				






ENTERO ROUND MEDIUM WALLWASH




ENTERO SQUARE MEDIUM WALLWASH

Entero Medium Trimless




ROUND
ØKIT

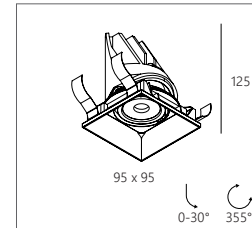


SQUARE
KIT

1800-4000K / CRI 90				2700-6500K / CRI 90		
9W / 979lm / 500mA				9W / 1087lm / 500mA		
	18°	30°	45°	18°	30°	45°
Round	28467 9010 	28467 9020 	28467 9030 	28432 9010 	28432 9020 	28432 9030 
Square	28467 9030 	28567 9020 	28567 9030 	28532 9010 	28532 9020 	28532 9030 
 B (Black) / GC (Gold Colour) / W (White)						
Driver : DH						
Compulsory : IC (Round) / ID (Square)						
Accessories : ii						

Entero Medium Trimless Wallwash




ROUND WALLWASH
ØKIT




SQUARE WALLWASH
KIT


	1800-4000K / CRI 90	2700-6500K / CRI 90
	9W / 979lm / 500mA	9W / 1087lm / 500mA
Round	28468 9000 	28469 9000 
Square	28568 9000 	28569 9000 
 B (Black) / GC (Gold Colour) / W (White)		
Driver : DH		
Compulsory : IC (Round) / ID (Square)		

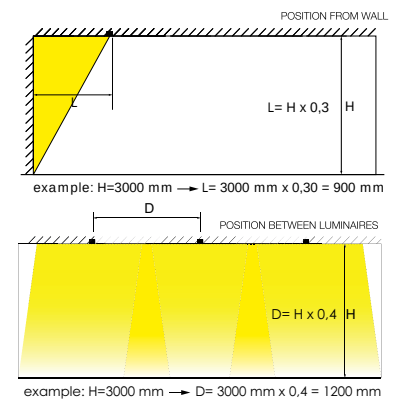

Entero Medium Trimless IP




ROUND IP
ØKIT




SQUARE IP
KIT

1800-4000K / CRI 90			2700-6500K / CRI 90	
9W / 979lm / 500mA			9W / 1087lm / 500mA	
	18°	30°	18°	30°
Round	28473 9010 ◊	28473 9020 ◊	28455 9010 ◊	28455 9020 ◊
Square	28573 9010 ◊	28573 9020 ◊	28555 9010 ◊	28555 9020 ◊
◊ B (Black) / GC (Gold Colour) / W (White)				
IP44				
Driver : DH				
Compulsory : IC (Round) / ID (Square)				

Entero Medium




ROUND
Ø92




SQUARE
92 x 92

	1800-4000K / CRI 90			2700-6500K / CRI 90		
	9W / 979lm / 500mA			9W / 1087lm / 500mA		
	18°	30°	45°	18°	30°	45°
Round	28460 9010 ☐	28460 9020 ☐	28460 9030 ☐	28412 9010 ☐	28412 9020 ☐	28412 9030 ☐
Square	28560 9010 ☐	28560 9020 ☐	28560 9030 ☐	28512 9010 ☐	28512 9020 ☐	28512 9030 ☐
☐ B (Black) / GC (Gold Colour) / W (White)						
Driver : DH						
Accessories : ii						


Entero Medium Wallwash



ROUND WALLWASH
Ø92




SQUARE WALLWASH
92 x 92

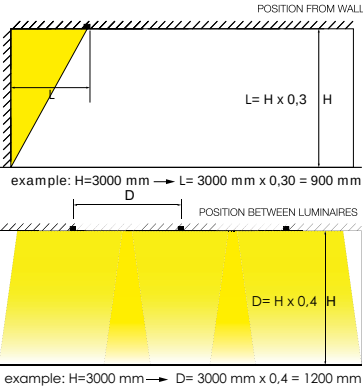


	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	Round	Square	Round	Square
Round	28461 9000 ☐	28561 9000 ☐	28462 9000 ☐	28562 9000 ☐
Square	28461 9000 ☐	28561 9000 ☐	28462 9000 ☐	28562 9000 ☐
☐ B (Black) / GC (Gold Colour) / W (White)				
Driver : DH				

Entero Medium IP




ROUND IP
Ø92




SQUARE IP
92 x 92

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	18°	30°	18°	30°
Round	28463 9010 ☐	28463 9020 ☐	28416 9010 ☐	28416 9020 ☐
Square	28563 9010 ☐	28563 9020 ☐	28516 9010 ☐	28516 9020 ☐
☐ B (Black) / GC (Gold Colour) / W (White)				
IP44				
Driver : DH				

Entero Medium X



ROUND
Ø92




SQUARE
92 x 92

	1800-4000K / CRI 90		2700-6500K / CRI 90	
	9W / 979lm / 500mA		9W / 1087lm / 500mA	
	18°	30°	18°	30°
Round	28471 9010 ☐	28471 9020 ☐	28445 9010 ☐	28445 9020 ☐
Square	28571 9010 ☐	28571 9020 ☐	28545 9010 ☐	28545 9020 ☐
☐ B (Black) / W (White)				
IP65				
Driver : DH				
Accessories : ii				




ENTERO ROUND LARGE

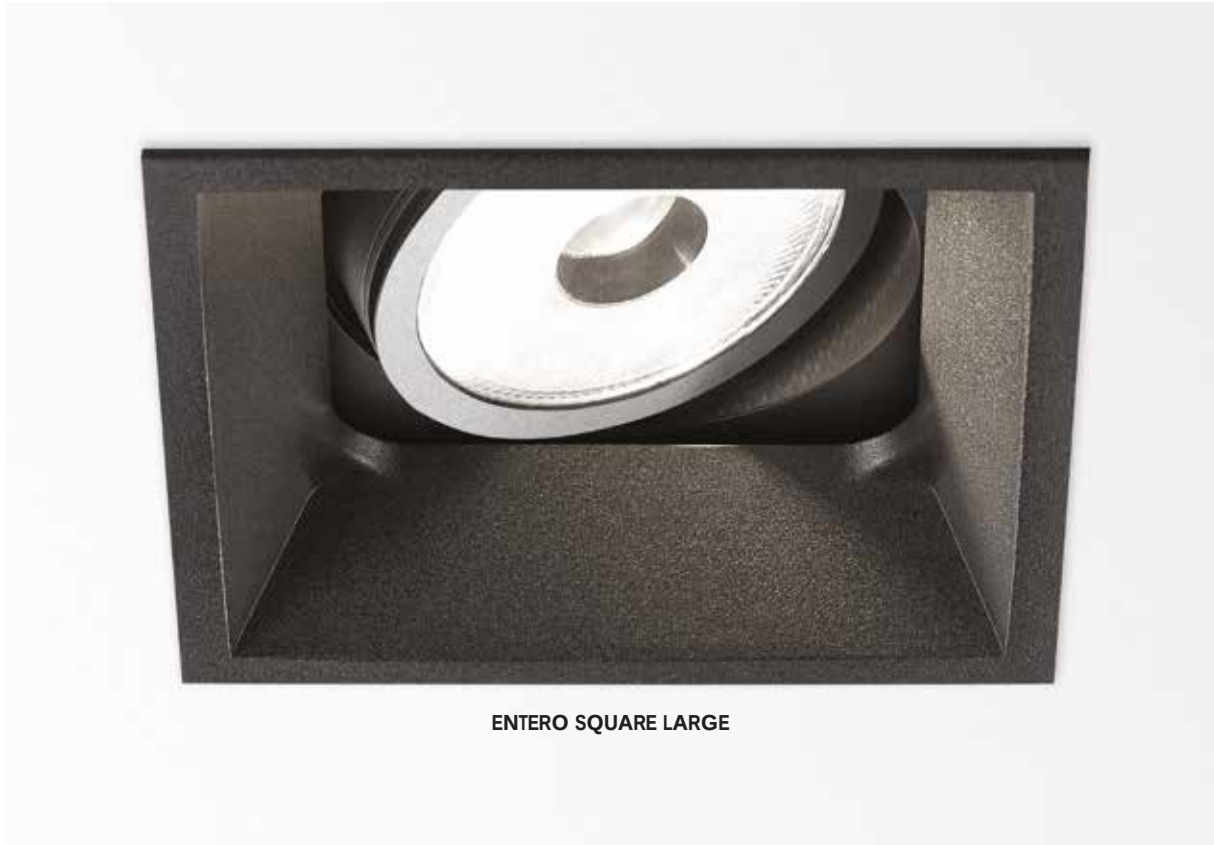


ENTERO SQUARE LARGE

Entero Large Trimless

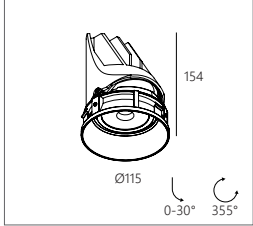


ROUND
ØKIT




SQUARE
KIT

2700-6500K / CRI 90			
17.8W / 2054lm / 500mA			
	18°	30°	45°
Round	28437 9010 ◊	28437 9020 ◊	28437 9030 ◊
Square	28537 9010 ◊	28537 9020 ◊	28537 9030 ◊
◊ B (Black) / GC (Gold Colour) / W (White)			
Driver : DH			
Compulsory : IE (Round) / IF (Square)			
Accessories : iii			

Entero Large



ROUND
Ø112




SQUARE
112 x 112


2700-6500K / CRI 90			
17.8W / 2054lm / 500mA			
	18°	30°	45°
Round	28420 9010 ◊	28420 9020 ◊	28420 9030 ◊
Square	28520 9010 ◊	28520 9020 ◊	28520 9030 ◊
◊ B (Black) / GC (Gold Colour) / W (White)			
Driver : DH			
Accessories : iii			



Entero Large IP




ROUND IP
Ø112




SQUARE IP
112 x 112

2700-6500K / CRI 90		
17.8W / 2054lm / 500mA		
	18°	30°
Round	28423 9010 ◊	28423 9020 ◊
Square	28523 9010 ◊	28523 9020 ◊
◊ B (Black) / GC (Gold Colour) / W (White)		
IP44		
Driver : DH		

Entero Large X



ROUND
Ø112



SQUARE
112 x 112

2700-6500K / CRI 90		
17.8W / 2054lm / 500mA		
	18°	30°
Round	28449 9010 ◊	28449 9020 ◊
Square	28549 9010 ◊	28549 9020 ◊
◊ B (Black) / W (White)		
IP65		
Driver : DH		
Accessories : iii		




DELTA LIGHT®

SPY

Collection




Spy 52 Trimless



ØKIT

2700-6500K / CRI 90	
9W /1087lm / 500mA	
20°	45°
19813 9020 ☐	19813 9030 ☐
☐ B (Black) / W (White)	
Driver : DH	
Compulsory : IG, IH	
Accessories : iv	


Spy 52 ST



Ø98


2700-6500K / CRI 90	
9W /1087lm / 500mA	
20°	45°
19816 9020 ☐	19816 9030 ☐
☐ W-W (White-White)	
Driver : DH	
Compulsory : IH	
Accessories : iv	

Spy 52 Clip




Ø50

Spy 52 On




Spy 52 Clip		Spy 52 On	
2700-6500K / CRI 90			
9W /1087lm / 500mA			
20°	45°	20°	45°
19822 9020 ☐	19822 9030 ☐	19825 9020 ☐	19825 9030 ☐
☐ B-B (Black-Black) / W-W (White-White)		☐ B (Black) / W (White)	
Driver : DH			
Compulsory : IH			
Accessories : iv			

Spy 66 Clip



Ø50


Spy 66 On



Spy 66 Clip			Spy 66 On		
2700-6500K / CRI 90					
9W /1087lm / 500mA					
18°	30°	45°	18°	30°	45°
24622 9010 ☐	24622 9020 ☐	24622 9030 ☐	24624 9010 ☐	24624 9020 ☐	24624 9030 ☐
☐ B-B (Black-Black) / W-W (White-White)			☐ B (Black) / W (White)		
Driver : DH					
Compulsory : II					
Accessories : v					


DELTA LIGHT®

Multinova

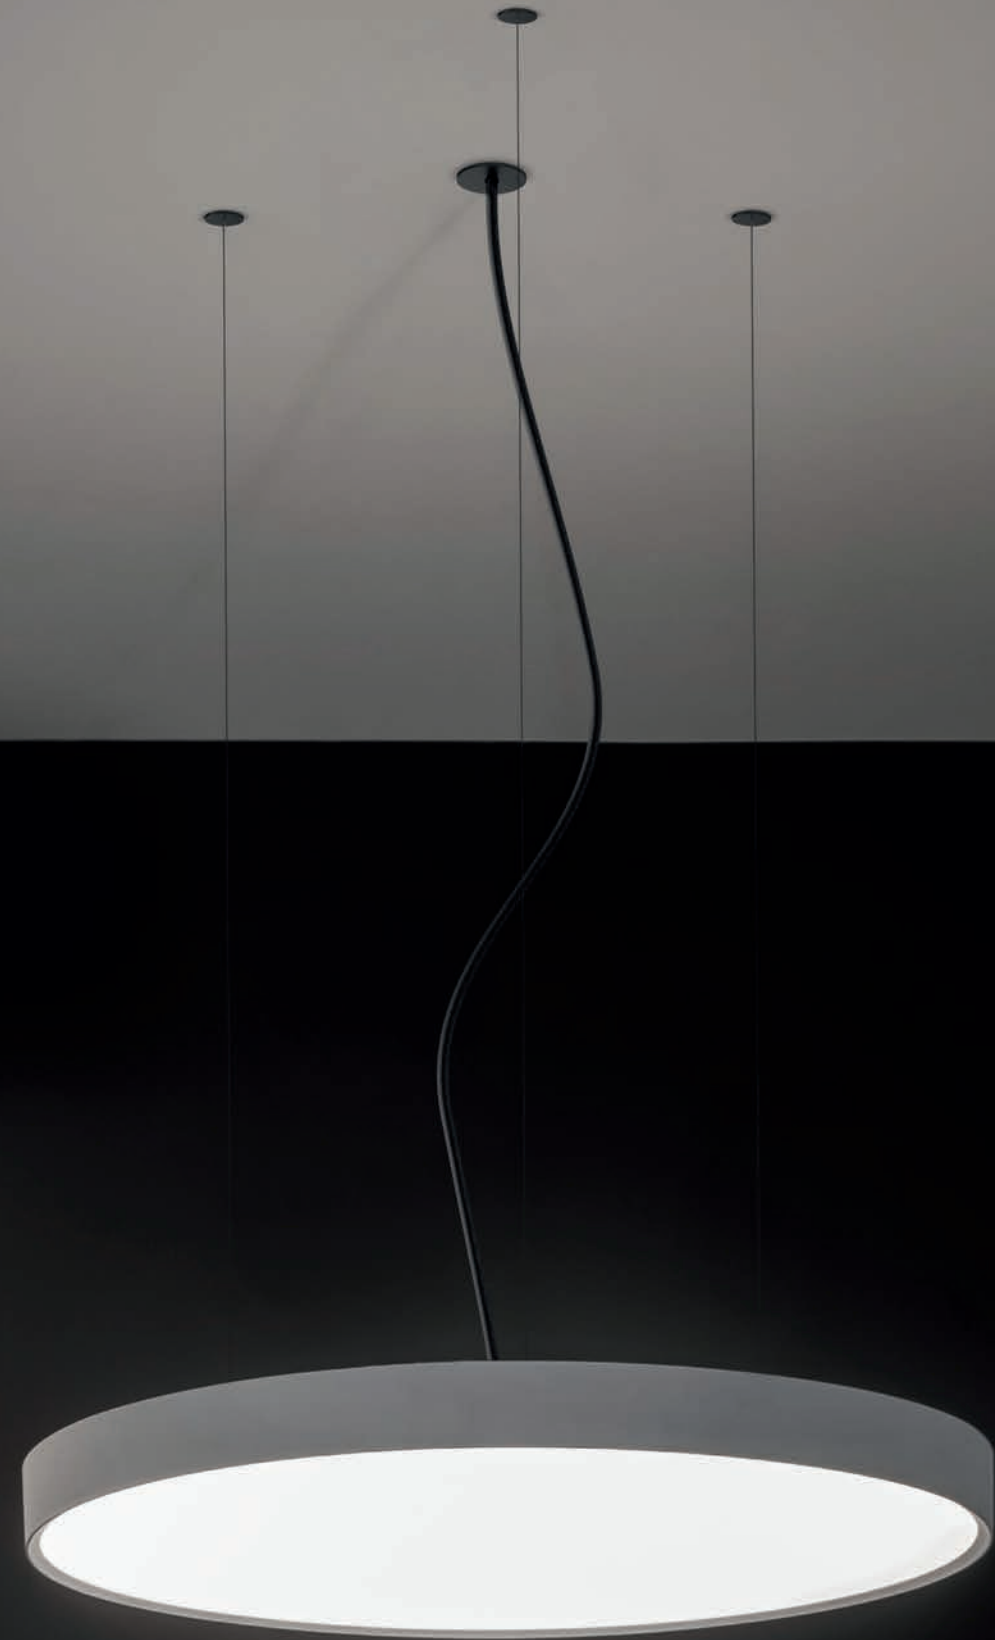




Multinova 30



2700-6500K / CRI 90		
9.4W / 1367lm / 220-240V		
SBL	DALI DIM	PRISMATIC
27914 9005 ◊	27915 9005 ◊	
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)	
Recessed / Suspended versions on request		


Multinova 55



2700-6500K / CRI 90		
31.5W / 4570lm / 220-240V		
SBL	DALI DIM	PRISMATIC
28014 9005 ◊		28015 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)		◊ B (Black) / W (White)
Recessed / Suspended versions on request		




Multinova 30 Down-Up




2700-6500K / CRI 90		
UP - 2.8W / 406lm DOWN - 9.3W / 1352lm / 220-240V		
SBL		PRISMATIC
DALI DIM		
27920 9005 ◊		27921 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)		◊ B (Black) / W (White)
Suspended versions on request		

Multinova 55 Down-Up




2700-6500K / CRI 90	
UP - 4.5W / 655lm DOWN - 30.5W / 4422lm / 220-240V	
SBL	PRISMATIC
DALI DIM	
28020 9005	28021 9005
 B (Black) / GC (Gold Colour) / W (White)	 B (Black) / W (White)
Suspended versions on request	

Multinova 255



2700-6500K / CRI 90	
2 X 31.5W / 4570lm / 220-240V	
SBL	PRISMATIC
DALI DIM	
28059 9005 ◊	28060 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)
Accessories : vii	

Multinova 355




2700-6500K / CRI 90	
3 X 31.5W / 4570lm / 220-240V	
SBL	PRISMATIC
DALI DIM	
28065 9005 ◊	28066 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)	◊ B (Black) / W (White)
Accessories : vii	




DELTA LIGHT®

Magnet Track

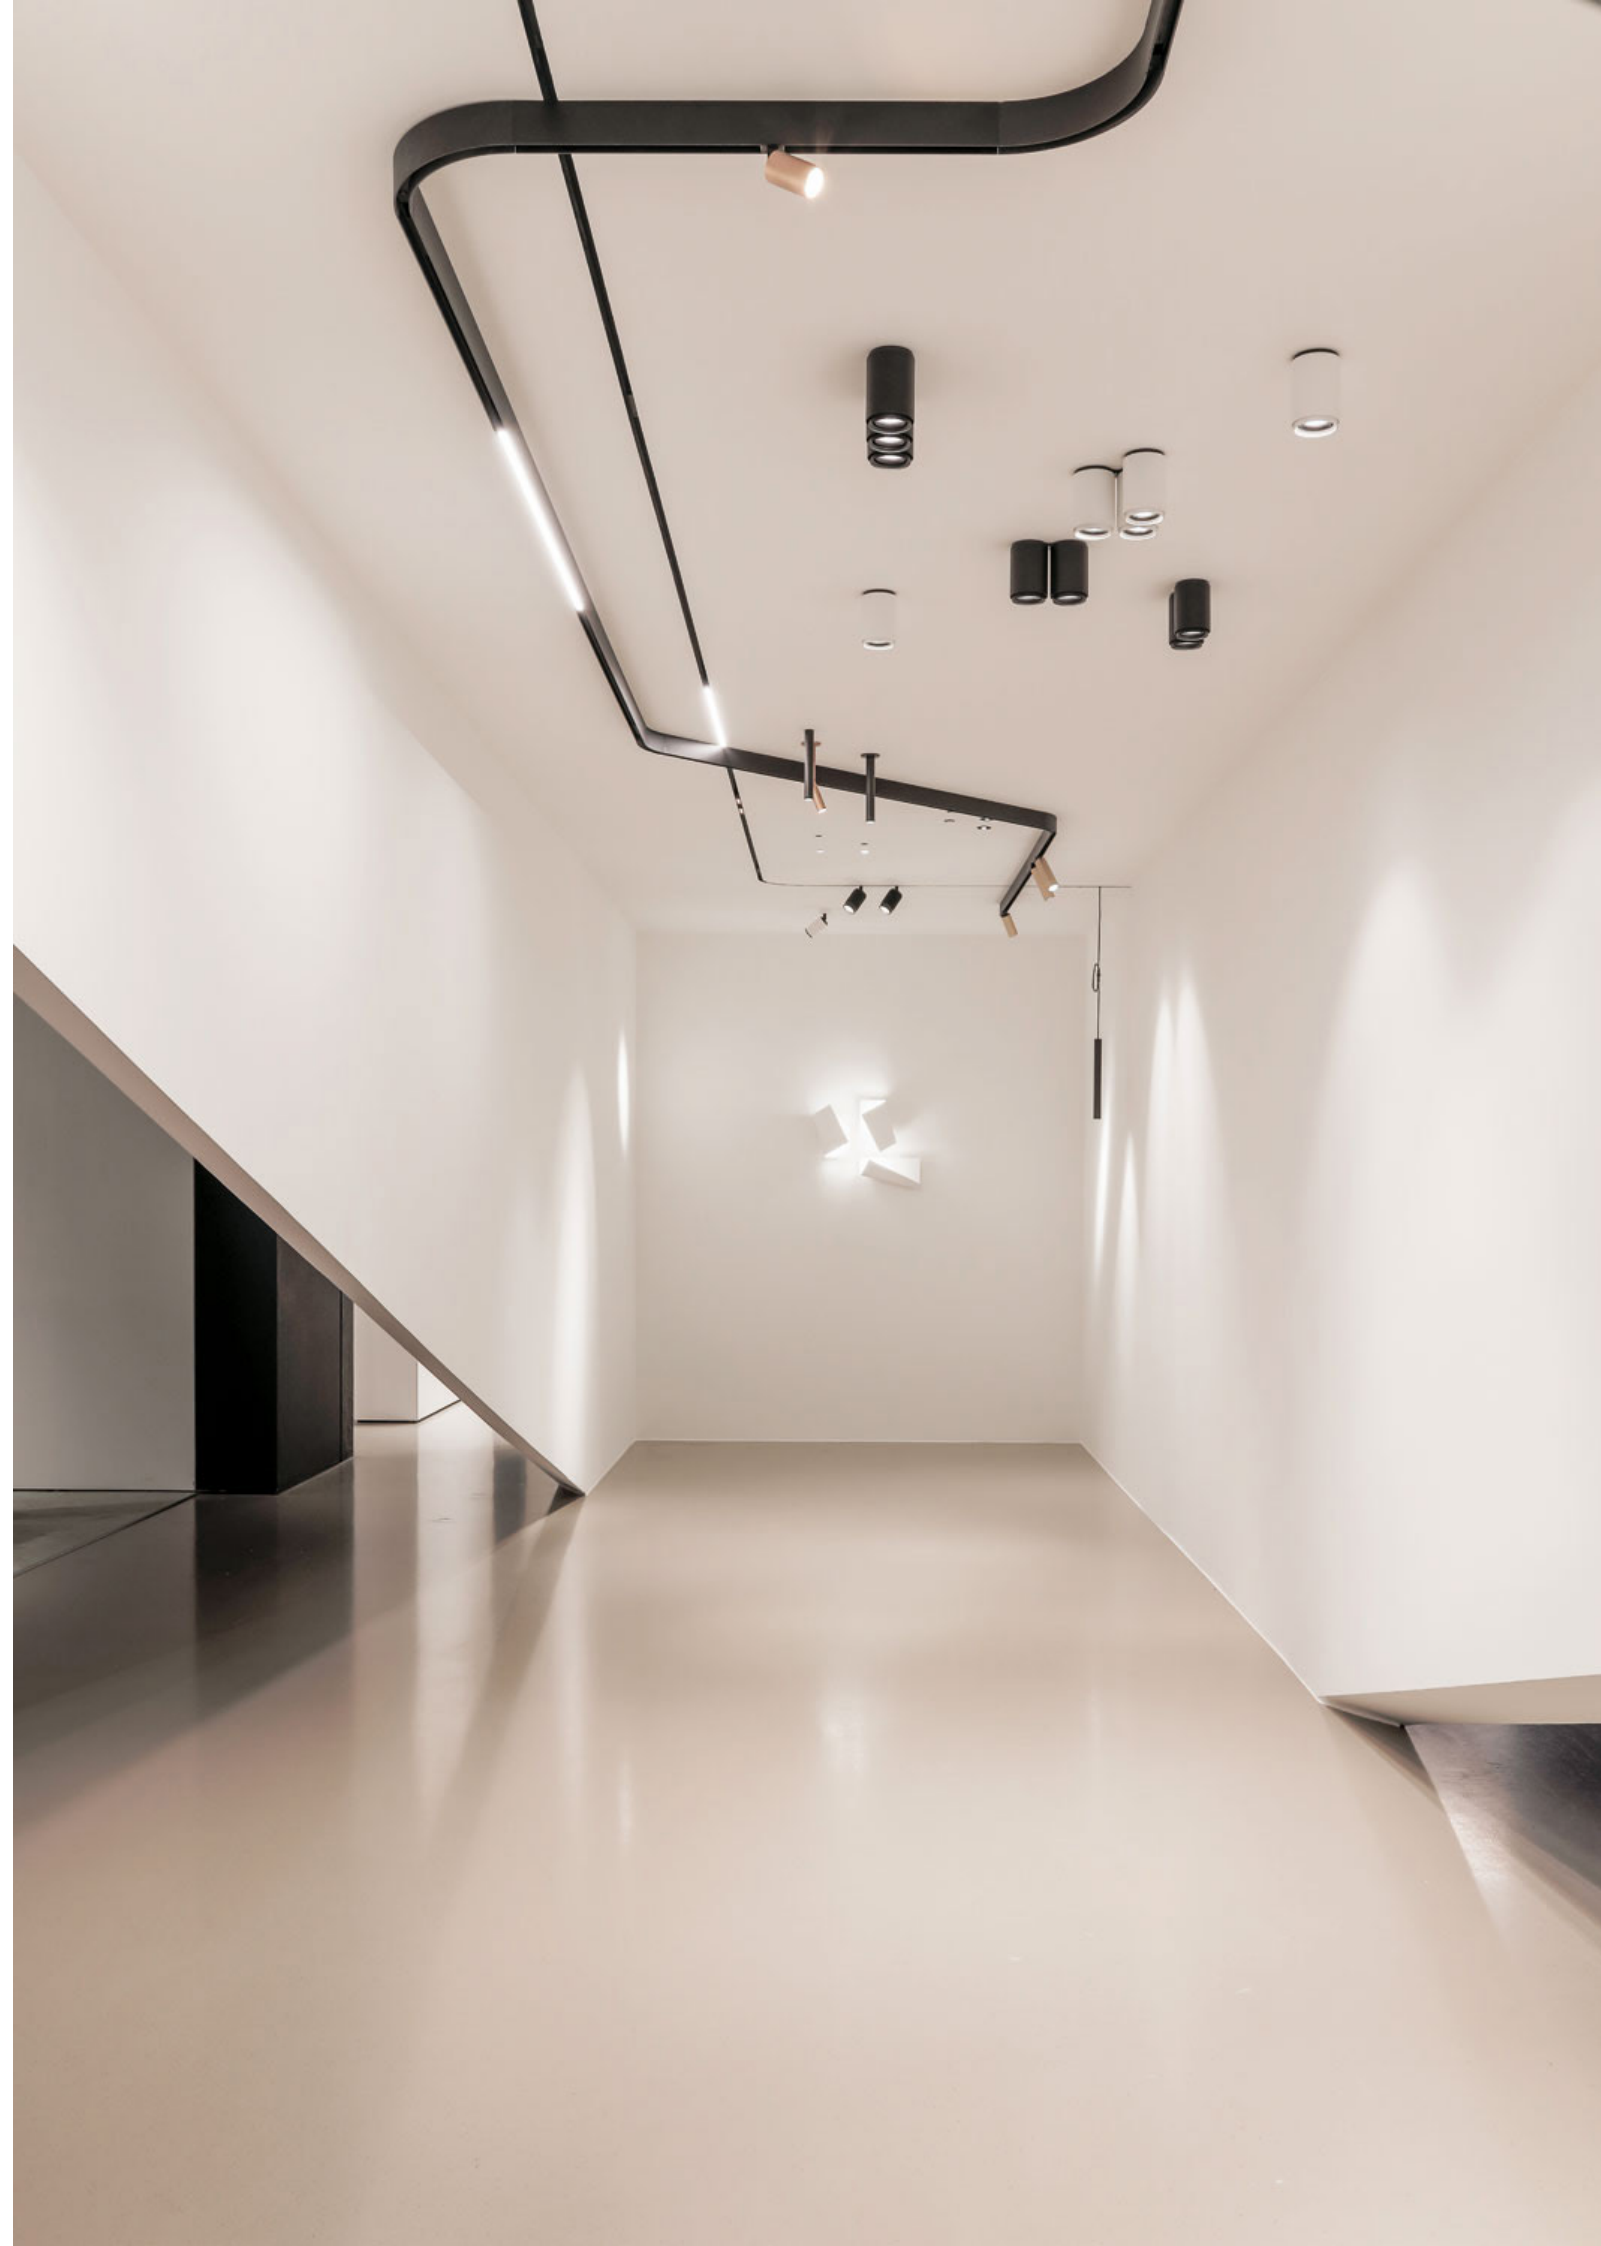





A. Profile Construction




SPM20 - Profile	
Profile 1m	420 20 10 00 ☐
Profile 2m	402 20 20 00 ☐
Profile 3m	420 20 30 00 ☐
	☐ B (Black)




SPM20 - Customised	
23301 0000 ☐	☐ B (Black)
Max. L / Profile: 3m 48V-DC (2 conductors) 2Dim conductors	




SPM20 - END CAP	
420 20 03 01 ☐	☐ B (Black)




SPM - Corner 180°	
420 06 01	Requirements profile connection





SPM20 - Corner set 90°	
420 20 06 06	Requirements profile connection




SPM20 - Corner set R90° *	
*No modules in Cornerset R	
23301 0690	INCL. connection cable



SPM20 - Corner set V90°	
420 20 06 17	Requirements profile connection

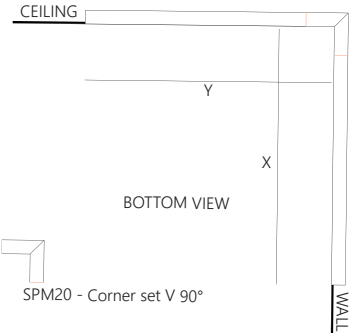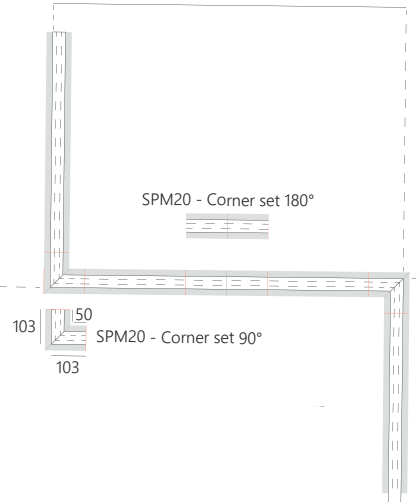


B. Profile Fixation




SPM20 - Fixation set	
☐ 57 x (L + 5) x 85	
420 20 14 01	Set of 2pcs


C. Profile Connection




SPM - Supply 48V	
420 99 03	48V-DC max. 200W / supply / max. 50m



SPM - connector 48V-180°	
420 99 01	48V-DC max. 200W / supply / max. 50m




SPM - connector 48V-0-180°	
420 99 02	48V-DC max. 200W / supply / max. 50m

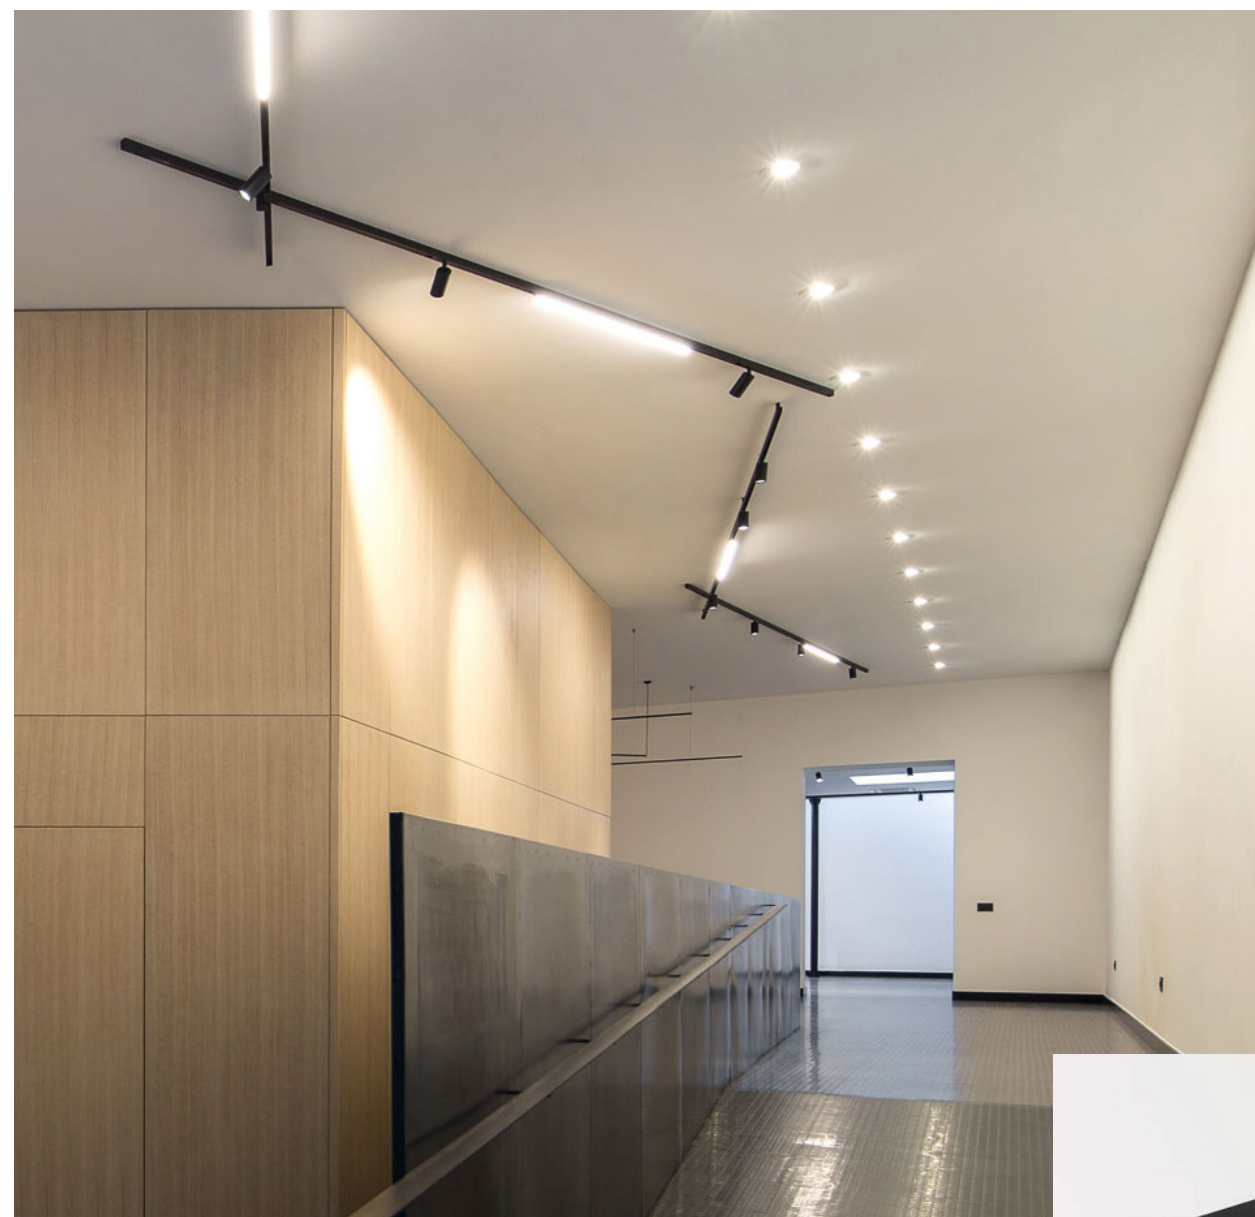

Shiftline M26L

A. Profile Construction

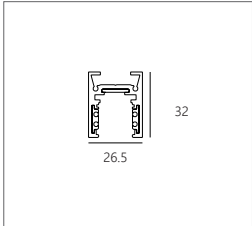


SLM26L - Profile

Profile 1m
23358 0010
B (Black) / W (White)


Profile 2m
23358 0020
PA (Polished Aluminium) / B (Black) / BRB (Black Bronze) / W (White)

Profile 3m
23358 0030
PA (Polished Aluminium) / B (Black) / BRB (Black Bronze) / W (White)
48V-DC (2 Conductors)
2 Dim Conductors




SLM26L - Corner set 180°

23358 0620
Requirements profile connection




SLM26L - Customised

23358 0000
B (Black) / W (White)
Max. L / Profile: 3m 48V-DC (2 conductors) 2 Dim conductors



SLM26L - END CAP SET


23358 0320
B (Black) / W (White)
Set of 2 pcs



SLM26L - Corner set 90°


23558 9640
B (Black) / W (White)
Requirements profile connection

B. Profile Fixation




SPM26L - Fixation set

23358 1410
Set of 2 pcs




SLM - Cable Suspension Single 1.6

23359 0510
L 1.6m
Option Suspension ST >15225 0340 B (Black) / W (White)



SLM - ROD Suspension 0.8m + connection

23358 1510
B (Black) / W (White)
EXCL. Cabling



SLM - ROD Suspension 0.8m

23358 1520
B (Black) / W (White)




SPM26L / M35R Mask

23377 0030
B (Black)
L 2m




C. Profile Connection




SPM - Supply 48V

420 99 03
48V-DC max. 200W / supply / max. 50m




SLM26L - Side Supply 48V

23358 1540
B (Black)
48V-DC max. 200W / supply / max. 50m




SPM - connector 48V-180°

420 99 01
48V-DC max. 200W / supply / max. 50m



SPM - connector 48V-90°

23300 9920
48V-DC max. 200W / supply / max. 50m




Current Supply Set L1.6m Transparent

23359 2120 -2 x 0.75mm ²
For MDL
23359 2140 -4 x 0.75mm ²
For DALI Dim

Current Supply Set L1.6m Black


23359 2220 -2 x 0.75mm ²
For MDL
23359 2240 -4 x 0.75mm ²
For DALI Dim

Options
Connection ST >15225 0360 B (Black) / W (White)
Cable Base R >203 99 55 ANO (Anodised) / B (Black) / W (White)
Cable Base S >203 99 56 ANO (Anodised) / B (Black) / W (White)
Coverset R62-90-100 / S 62-80-90




SLM26L - Powerbox 48V/100w

23377 0040
B (Black) / W (White)
120-240V

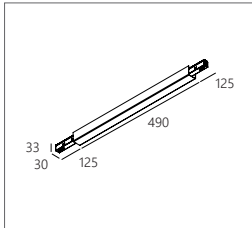


SLM26L - Mid Powerbox 48V/10W

23377 0050
B (Black) / W (White)
120-240V



SLM26L - C Powerbox 48V/100W

23380 0060
B (Black) / W (White)
120-240V
INCL. CABLE 1.6m
BLACK FOR BLACK BOX
GREY FOR WHITE BOX




SLM26L - C Powerbox 48V/100W

23380 007W
B (Black) / W (White)
120-240V
INCL.SMART 48 MODULATOR WD
INCL. CABLE 1.6m
BLACK FOR BLACK BOX
GREY FOR WHITE BOX




Spy 52




2700-6500K / CRI 90		
9W / 1087lm / 48V-DC		
20°		45°
DALI DIM		
M20	23331 9025 ◊	23331 9035 ◊
M26L	23215 9025 ◊	23215 9035 ◊
M35R	23215 9025 ◊	23215 9035 ◊
◊ B (Black) / W (White)		
Compulsory : IH		
Accessories : iv		

Spy 66



2700-6500K / CRI 90			
9W / 1087lm / 48V-DC			
18°		30°	45°
DALI DIM			
M20	23360 9015 ◊	23360 9025 ◊	23360 9035 ◊
M26L	23292 9015 ◊	23292 9025 ◊	23292 9035 ◊
M35R	23292 9015 ◊	23292 9025 ◊	23292 9035 ◊
◊ B (Black) / W (White)			
Compulsory : II			
Accessories : v			

Multinova 30



2700-6500K / CRI 90		
9.4W / 1367lm / 48V-DC		
SBL		PRISMATIC
M20	27953 9005 ◊	27954 9005 ◊
M26L	27944 9005 ◊	27945 9005 ◊
M35R	27944 9005 ◊	27945 9005 ◊
◊ B (Black) / GC (Gold Colour) / W (White)		◊ B (Black) / W (White)

DELTA LIGHT®


3-Phase Track






Recessed

- COMPOSITION**
- A. Track 3F Dim In
 - B. Endcap / Supply / Corners
 - C. Fixation
 - D. Accessories

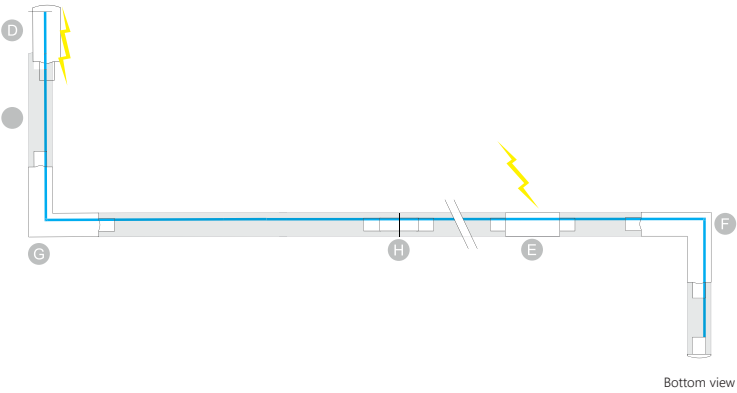


A. Tacak.




Track 3F Dim In	
1m	
200 13 410	⌀ B (Black) / W (White)
110-240V / 50-60Hz / 3F	
2m	
200 13 420	⌀ B (Black) / W (White)
100-240V / 50-60Hz / 3F	
3m	
200 13 430	⌀ B (Black) / W (White)
100-240V / 50-60Hz / 3F	


B. Endcap / Supply / Corners.




Track in End Cap	
200 13 41	⌀ B (Black) / W (White)




Track End Supply 11	
200 12 11	⌀ B (Black) / W (White)
100-240V / 50-60Hz	




Track End Supply 12	
200 12 12	⌀ B (Black) / W (White)
100-240V / 50-60Hz	




Track Middle Supply	
200 12 14	⌀ B (Black) / W (White)
100-240V / 50-60Hz	




Track Corner 90° Out	
200 12 35	⌀ B (Black) / W (White)




Track Corner 90° In	
200 12 34	⌀ B (Black) / W (White)




Track Corner 180°	
200 12 21	⌀ B (Black) / W (White)




Track In End Cover	
200 13 11	⌀ B (Black) / W (White)




Track In End Cover	
200 13 11	⌀ B (Black) / W (White)



Track In Middle Cover	
200 13 14	⌀ B (Black) / W (White)




Track In 90° Cover	
200 13 12	⌀ B (Black) / W (White)




Track In 90° Cover	
200 13 12	⌀ B (Black) / W (White)

C. Fixation.



Track Inside Clip	
40 x (L + Endcap / Supply / Corners) x 70	
200 13 14 01	

D. Accessories




Track Cutting Tool	
200 12 01	




Surface Mounted

- COMPOSITION**
- A. Track 3F Dim On
 - B. Endcap / Supply / Corners
 - C. Fixation
 - D. Current Supply
 - E. Accessories
 - F. Option




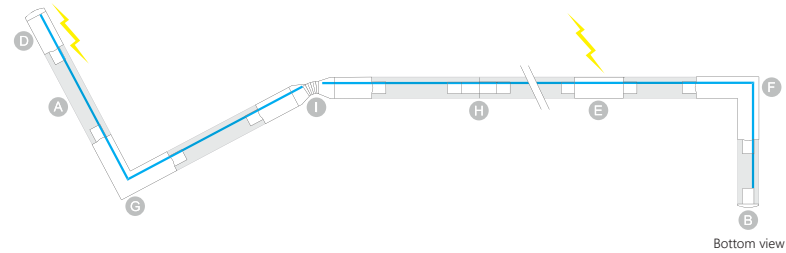


A. Tacak.



Track 3F Dim On	
1m	
200 12 410	⊕ B (Black) / W (White)
110-240V / 50-60Hz / 3F	
2m	
200 12 420	⊕ B (Black) / W (White)
100-240V / 50-60Hz / 3F	
3m	
200 12 430	⊕ B (Black) / W (White)
100-240V / 50-60Hz / 3F	

B. Endcap / Supply / Corners.







Track On End Cap	
200 12 41	⊕ B (Black) / W (White)

Track End Supply 11	
200 12 11	⊕ B (Black) / W (White)
100-240V / 50-60Hz	

Track End Supply 12	
200 12 12	⊕ B (Black) / W (White)
100-240V / 50-60Hz	

Track Middle Supply	
200 12 14	⊕ B (Black) / W (White)
100-240V / 50-60Hz	




Track Corner 90° Out	
200 12 35	⊕ B (Black) / W (White)

Track Corner 90° In	
200 12 34	⊕ B (Black) / W (White)


Track Corner 180°	
200 12 21	⊕ B (Black) / W (White)

Track Flex Corner	
200 12 24	⊕ B (Black) / W (White)
Flexible 60° - 300°	


C. Fixation



200 12 02	⊕ ANO (Anodised)
-----------	------------------




200 12 13	L 3.0m
-----------	--------




200 12 50	⊕ A (Alu Grey) / B (Black) / W (White)
L 948mm	

D. Current supply



Track Current Supply	
5 x 0.75mm ² 3.0m	
200 99 53	L 3.0m / 5x 0.75mm ²
Options: Cable base R/S	

E. Accessories



200 12 01


F. Option

INSTALLATION		
Cable Base R	⊕	Ø57 x 41
203 99 55	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		
Cable Base S	⊕	57 x 57 x 41
203 99 56	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		
Coverset R	⊕	Ø62
204 00 62	⊕	Ø90
204 00 90	⊕	Ø100
204 00 100	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		
Coverset S	⊕	62 x 62
204 62 62	⊕	80 x 80
204 80 80	⊕	90 x 90
204 90 90	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		




Pendant

- COMPOSITION**
- A. Track 3F Dim H
 - B. Endcap / Supply / Corners
 - C. Fixation
 - D. Current supply
 - E. Accessories
 - F. Option




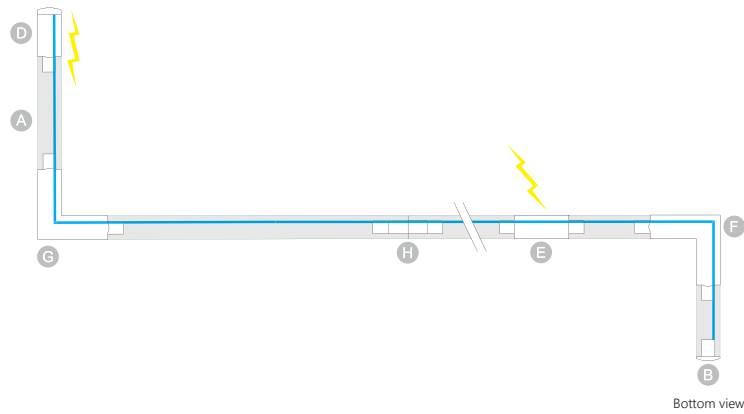


A. Tacak.



Track 3F Dim H	
1m	
200 14 410	⊕
⊕ B (Black) / W (White)	
110-240V / 50-60Hz / 3F	
2m	
200 14 420	⊕
⊕ B (Black) / W (White)	
100-240V / 50-60Hz / 3F	
3m	
200 14 430	⊕
⊕ B (Black) / W (White)	
100-240V / 50-60Hz / 3F	

B. Endcap / Supply / Corners.






Track H End Cap	
200 14 41	⊕
⊕ B (Black) / W (White)	

Track H End Supply 11	
200 14 11	⊕
⊕ B (Black) / W (White)	
220-240V / 50-60Hz	

Track H End Supply 12	
200 14 12	⊕
⊕ B (Black) / W (White)	
100-240V / 50-60Hz	

Track H Middle Supply	
200 14 14	⊕
⊕ B (Black) / W (White)	
100-240V / 50-60Hz	




Track H Corner 90° out	
200 14 35	⊕
⊕ B (Black) / W (White)	

Track H Corner 90° in	
200 14 34	⊕
⊕ B (Black) / W (White)	


Track H Corner 180°	
200 14 21	⊕
⊕ B (Black) / W (White)	

C. Fixation




Track Dim H Suspension 3.0	
200 14 13	
L 3.0m	

D. Current supply



Track Current Supply	
5 x 0.75mm2 3.0m	
200 99 53	
L 3.0m / 5x 0.75mm2	
Options: Cable base R/S	

E. Accessories



Track Cutting Tool	
200 12 01	


F. Option

INSTALLATION		
Cable Base R	⊕	Ø57 x 41
203 99 55	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		
Cable Base S	⊕	57 x 57 x 41
203 99 56	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		
Coverset R	⊕	Ø62
204 00 62	⊕	Ø90
204 00 90	⊕	Ø100
204 00 100	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		
Coverset S	⊕	62 x 62
204 62 62	⊕	80 x 80
204 80 80	⊕	90 x 90
204 90 90	⊕	
⊕ ANO (Anodised) / B (Black) / W (White)		






Multinova 30 ADM



2700-6500K / CRI 90		
9.4W / 1367lm / 220-240V		
SBL	DALI DIM	PRISMATIC
27933 9005 ☐		27934 9005 ☐
☐ B (Black) / W (White)		


Multinova 55 ADM



2700-6500K / CRI 90		
21W / 3047lm / 220-240V		
SBL	DALI DIM	PRISMATIC
28033 9005 ☐		28034 9005 ☐
☐ B (Black) / W (White)		




Spy 52 ADM




2700-6500K / CRI 90		
9W / 1087lm / 220-240V		
20°	DALI DIM	45°
19881 9025 		19881 9035 
 B (Black) / W (White)		
Compulsory : IH		
Accessories : iv		

Spy 66 ADM



2700-6500K / CRI 90		
9W / 1087lm / 220-240V		
18°	30°	45°
DALI DIM		
24629 9015 ☐	24629 9025 ☐	24629 9035 ☐
☐ B (Black) / W (White)		
Compulsory : II		
Accessories : v		

Spy 90 ADM




2700-6500K / CRI 90		
17.8W / 2054lm / 220-240V		
18°	30°	45°
DALI DIM		
19884 9015 ☐	19884 9025 ☐	19884 9035 ☐
☐ B (Black) / W (White)		
Compulsory : IJ		
Accessories : vi		



Glee

Glee




Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7480-G5-TW9C-20-◊	MX 7480-G5-TW9C-30-◊	MX 7480-G5-TW9C-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7480-G6-09OBTWC-20-◊	MX 7480-G6-09OBTWC-30-◊	MX 7480-G6-09OBTWC-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		

Glee Adjustable




Standard		
2700-6500K / CRI 90		
10.2W / 1163lm / 550mA		
20°	30°	40°
MX 7475-G6-TW9C-20-◊	MX 7475-G6-TW9C-30-◊	MX 7475-G6-TW9C-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato

Xicato		
2700-6000K / CRI 95		
10.8W / 949lm / 300mA		
20°	30°	40°
MX 7475-G6-09OBTWC-20-◊	MX 7475-G6-09OBTWC-30-◊	MX 7475-G6-09OBTWC-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		

Glee Wallwasher



Standard	Xicato
2700-6500K / CRI 90	2700-6000K / CRI 95
9W / 1030lm / 500mA	8.8W / 771lm / 250mA
35°	35°
MX 7467-G5-TW9C-35-◊	MX 7467-G6-09OBTWC-35-◊
◊ 84 (White Trim & Silver Reflector)	◊ 84 (White Trim & Silver Reflector)
Driver : DB / DD	Driver : DA / DC
Accessories : viii	Accessories : viii



Glee / Glee Adjustable




Glee Wallwasher



Glee Spot


Glee Spot (Offset Tilting Version)



Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7476-G6-TW9C-20-◊	MX 7476-G6-TW9C-30-◊	MX 7476-G6-TW9C-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7476-G6-09OBTWC-20-◊	MX 7476-G6-TW9C-30-◊	MX 7476-G6-09OBTWC-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		

Glee Spot Adjustable



Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7495-G6-TW9C-20-◊	MX 7495-G6-TW9C-30-◊	MX 7495-G6-TW9C-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7495-G6-09OBTWC-20-◊	MX 7495-G6-09OBTWC-30-◊	MX 7495-G6-09OBTWC-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : viii		




Glee Spot / Glee Spot Adjustable

For further details, please refer to page 142 - 143




Mini Glee



Ø59

2700-6500K / CRI 90		
7.4W / 762lm / 200mA		
20°	30°	40°
MX 7484-G6-TW6C-20-◊	MX 7484-G6-TW6C-30-◊	MX 7484-G6-TW6C-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : ix		


Mini Glee Spot



Ø59

2700-6500K / CRI 90		
7.4W / 762lm / 200mA		
20°	30°	40°
MX 7483-G6-TW6C-20-◊	MX 7483-G6-TW6C-30-◊	MX 7483-G6-TW6C-40-◊
◊ 82 (White Trim & Black Reflector) / 84 (White Trim & Silver Reflector) / 86 (White Trim & Sandblasted Reflector) / 89 (White Trim & Rose Gold Reflector)		
Driver : DA / DC		
Accessories : ix		

Mini Glee Spot Wallwash



Ø59

2700-6500K / CRI 90		
7.4W / 762lm / 200mA		
Wallwash		
MX 7485-G6-TW6C-NA-◊		
◊ 84 (White Trim & Silver Reflector)		
Driver : DA / DC		

Mini Glee




Mini Glee / Mini Glee Spot




Mini Glee Spot Wallwash

Pin Hole

Pin Hole Adjustable




ROUND
Ø89




SQUARE
Ø89

Standard			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Round	MX 7425-G5-TW9C-20-⌀	MX 7425-G5-TW9C-30-⌀	MX 7425-G5-TW9C-40-⌀
Square	MX 7411-G5-TW9C-20-⌀	MX 7411-G5-TW9C-30-⌀	MX 7411-G5-TW9C-40-⌀
⌀ 80 (White) / 10 (Black)			
Driver : DB / DD			
Accessories : viii			
Xicato			
2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	20°	30°	40°
Round	MX 7425-G6-09OBTWC-20-⌀	MX 7425-G6-09OBTWC-30-⌀	MX 7425-G6-09OBTWC-40-⌀
Square	MX 7411-G6-09OBTWC-20-⌀	MX 7411-G6-09OBTWC-30-⌀	MX 7411-G6-09OBTWC-40-⌀
⌀ 80 (White) / 10 (Black)			
Driver : DA / DC			
Accessories : viii			

Pin Hole Adjustable with Glass Cover

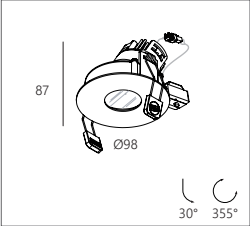

ROUND
Ø89




SQUARE
Ø89

Standard			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Round	MX 7425C-G5-TW9C-20-⌀	MX 7425C-G5-TW9C-30-⌀	MX 7425C-G5-TW9C-40-⌀
Square	MX 7411C-G5-TW9C-20-⌀	MX 7411C-G5-TW9C-30-⌀	MX 7411C-G5-TW9C-40-⌀
⌀ 80 (White) / 10 (Black)			
IP55			
Driver : DB / DD			
Accessories : viii			
Xicato			
2700-6500K / CRI 95			
8.8W / 771lm / 250mA			
	20°	30°	40°
Round	MX 7425C-G6-09OBTWC-20-⌀	MX 7425C-G6-09OBTWC-30-⌀	MX 7425C-G6-09OBTWC-40-⌀
Square	MX 7411C-G6-09OBTWC9-20-⌀	MX 7411C-G6-09OBTWC-30-⌀	MX 7411C-G6-09OBTWC-40-⌀
⌀ 80 (White) / 10 (Black)			
IP55			
Driver : DA / DC			
Accessories : viii			




Pin Hole



Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7426-G5-TW9C-20-☐	MX 7426-G5-TW9C-30-☐	MX 7426-G5-TW9C-40-☐
☐ 80 (White) / 10 (Black)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7426-G6-09OBTWC-20-☐	MX 7426-G6-09OBTWC-30-☐	MX 7426-G6-09OBTWC-40-☐
☐ 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		

Pin Hole with Glass Cover



Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7426C-G5-TW9C- 20-☐	MX 7426C-G5-TW9C-30-☐	MX 7426C-G5-TW9C-40-☐
☐ 80 (White) / 10 (Black)		
IP55		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7426C-G6-09OBTWC- 20-☐	MX 7426C-G6-09OBTWC-30-☐	MX 7426C-G6-09OBTWC-40-☐
☐ 80 (White) / 10 (Black)		
IP55		
Driver : DA / DC		
Accessories : viii		



Pin Hole




Pin Hole Sq



Pin Slot

Pin Slot Adjustable




Ø78

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7427-G5-TW9C-20-	MX 7427-G5-TW9C-30-	MX 7427-G5-TW9C-40-
Ø 80 (White) / 10 (Black)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7427-G6-09OBTWC-20-	MX 7427-G6-09OBTWC-30-	MX 7427-G6-09OBTWC-40-
Ø 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		

Pin Slot Adjustable with Glass Cover



Ø78

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7427C-G5-TW9C-20-	MX 7427C-G5-TW9C-30-	MX 7427C-G5-TW9C-40-
Ø 80 (White) / 10 (Black)		
IP 55		
Driver : DB / DD		
Accessories : viii		


Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7427-G6-09OBTWC-20-	MX 7427-G6-09OBTWC-30-	MX 7427-G6-09OBTWC-40-
Ø 80 (White) / 10 (Black)		
IP55		
Driver : DA / DC		
Accessories : viii		



Pin Slot Adjustable




Renia



Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7490-G5-TW9C-20-◊	MX 7490-G5-TW9C-30-◊	MX 7490-G5-TW9C-40-◊
◊ 80 (White) / 10 (Black)		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7490-G6-09OBTWC-20-◊	MX 7490-G6-09OBTWC-30-◊	MX 7490-G6-09OBTWC-40-◊
◊ 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		

Renia Adjustable



Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7491-G5-TW9C-20-◊	MX 7491-G5-TW9C-30-◊	MX 7491-G5-TW9C-40-◊
◊ 80 (White) / 10 (Black)		
IP55		
Driver : DB / DD		
Accessories : viii		

Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7491-G6-09OBTWC-20-◊	MX 7491-G6-09OBTWC-30-◊	MX 7491-G6-09OBTWC-40-◊
◊ 80 (White) / 10 (Black)		
Driver : DA / DC		
Accessories : viii		

Renia




Renia



Renia Adjustable

Mini Trim


Mini Trim




81 x 81

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7460-G5-TW9C-20-	MX 7460-G5-TW9C-30-	MX 7460-G5-TW9C-40-
80 (White) / 10 (Black)		
Driver : DB / DD		
Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
20°	30°	40°
MX 7460-G6-09OBTWC-20-	MX 7460-G6-09OBTWC-30-	MX 7460-G6-09OBTWC-40-
80 (White) / 10 (Black)		
Driver : DA / DC		

Mini Trim Adjustable




ROUND
Ø84



SQUARE
101 x 101

	Standard		
	2700-6500K / CRI 90		
	9W / 1030lm / 500mA		
	20°	30°	40°
Round	MX 7463-G5-TW9C-20-	MX 7463-G5-TW9C-30-	MX 7463-G5-TW9C-40-
Square	MX 7462-G5-TW9C-20-	MX 7462-G5-TW9C-30-	MX 7462-G5-TW9C-40-
80 (White) / 10 (Black)			
Driver : DB / DD			
	Xicato		
	2700-6000K / CRI 95		
	8.8W / 771lm / 250mA		
	20°	30°	40°
Round	MX 7463-G6-09OBTWC-20-	MX 7463-G6-09OBTWC-30-	MX 7463-G6-09OBTWC-40-
Square	MX 7462-G6-09OBTWC-20-	MX 7462-G6-09OBTWC-30-	MX 7462-G6-09OBTWC-40-
80 (White) / 10 (Black)			
Driver : DA / DC			

Mini Trim Wallwasher



Ø84

Standard		
2700-6500K / CRI 90		
9W / 1030lm / 500mA		
20°	30°	40°
MX 7478-G5-TW9C-20-	MX 7478-G5-TW9C-30-	MX 7478-G5-TW9C-40-
80 (White) / 10 (Black)		
Driver : DB / DD		
Xicato		
2700-6000K / CRI 95		
8.8W / 771lm / 250mA		
15°	24°	36°
MX 7478-G6-09OBTWC-20-	MX 7478-G6-09OBTWC-30-	MX 7478-G6-09OBTWC-40-
80 (White) / 10 (Black)		
Driver : DA / DC		



Mini Trim Adjustable Round




Mini Trim Adjustable Square




Multi Super Mini


Multi Super Mini

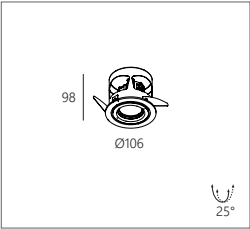


ROUND
Ø98



SQUARE (1 HEAD)
98 x 98



SQUARE (2 HEADS)
98 x 180



SQUARE (3 HEADS)
98 x 262

Standard			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Round	MX 7466-G5-TW9C-20-◊	MX 7466-G5-TW9C-30-◊	MX 7466-G5-TW9C40-◊
Square (1 Head)	MX 7464S-G5-TW9C-20-◊	MX 7464S-G5-TW9C-30-◊	MX 7464S-G5-TW9C40-◊
Square (2 Heads)	MX 7464D-G5-TW9C-20-◊	MX 7464D-G5-TW9C-30-◊	MX 7464D-G5-TW9C40-◊
Square (3 Heads)	MX 7464T-G5-TW9C-20-◊	MX 7464T-G5-TW9C-30-◊	MX 7464T-G5-TW9C40-◊
◊ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DB / DD			
Accessories : viii			
Xicato			
2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	15°	24°	36°
Round	MX 7466-G6-09OBTWC-20-◊	MX 7466-G6-09OBTWC-30-◊	MX 7466-G6-09OBTWC-40-◊
Square (1 Head)	MX 7464S-G6-09OBTWC-20-◊	MX 7464S-G6-09OBTWC-30-◊	MX 7464S-G6-09OBTWC-40-◊
Square (2 Heads)	MX 7464D-G6-09OBTWC-20-◊	MX 7464D-G6-09OBTWC-30-◊	MX 7464D-G6-09OBTWC-40-◊
Square (3 Heads)	MX 7464T-G6-09OBTWC-20-◊	MX 7464T-G6-09OBTWC-30-◊	MX 7464T-G6-09OBTWC-40-◊
◊ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DA / DC			
Accessories : viii			




Multi Super Mini Square (2 Heads)




Multi Super Mini Trimless


Multi Super Mini Trimless



SQUARE (1 HEAD)
97 x 97



SQUARE (2 HEADS)
97 x 179



SQUARE (3 HEADS)
97 x 261

Standard			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
	20°	30°	40°
Square (1 Head)	MX 7465S-G5-TW9C-20-⌀	MX 7465S-G5-TW9C-30-⌀	MX 7465S-G5-TW9C-40-⌀
Square (2 Heads)	MX 7465D-G5-TW9C-20-⌀	MX 7465D-G5-TW9C-30-⌀	MX 7465D-G5-TW9C-40-⌀
Square (3 Heads)	MX 7465T-G5-TW9C-20-⌀	MX 7465T-G5-TW9C-30-⌀	MX 7465T-G5-TW9C-40-⌀
⌀ 00B (Black Body) / 80W (White Body)			
Driver : DB / DD			
Compulsory : IK			
Accessories : viii			
Xicato			
2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
	20°	30°	40°
Square (1 Head)	MX 7465S-G6-09OBTWC-20-⌀	MX 7465S-G6-09OBTWC-30-⌀	MX 7465S-G6-09OBTWC-40-⌀
Square (2 Heads)	MX 7465D-G6-09OBTWC-20-⌀	MX 7465D-G6-09OBTWC-30-⌀	MX 7465D-G6-09OBTWC-40-⌀
Square (3 Heads)	MX 7465T-G6-09OBTWC-20-⌀	MX 7465T-G6-09OBTWC-30-⌀	MX 7465T-G6-09OBTWC-40-⌀
⌀ 00B (Black Body) / 80W (White Body)			
Driver : DA / DC			
Compulsory : IK			
Accessories : viii			



Multi Super Mini Trimless Square
(2 Heads)




DIP


Next Generation Green Lighting

DIP LED Panel emits both direct and indirect illumination to maximise people comfort with uniform light distribution. With impressive visual comfort and dimming possibilities, DIP LED Panel can save up to 70% energy comparing to traditional T5 fluorescent.


The diffuser incorporates an innovative micro film that optimizes the control of beam angles and minimizes glare, so that a low Unified Glare Ratio can be achieved.

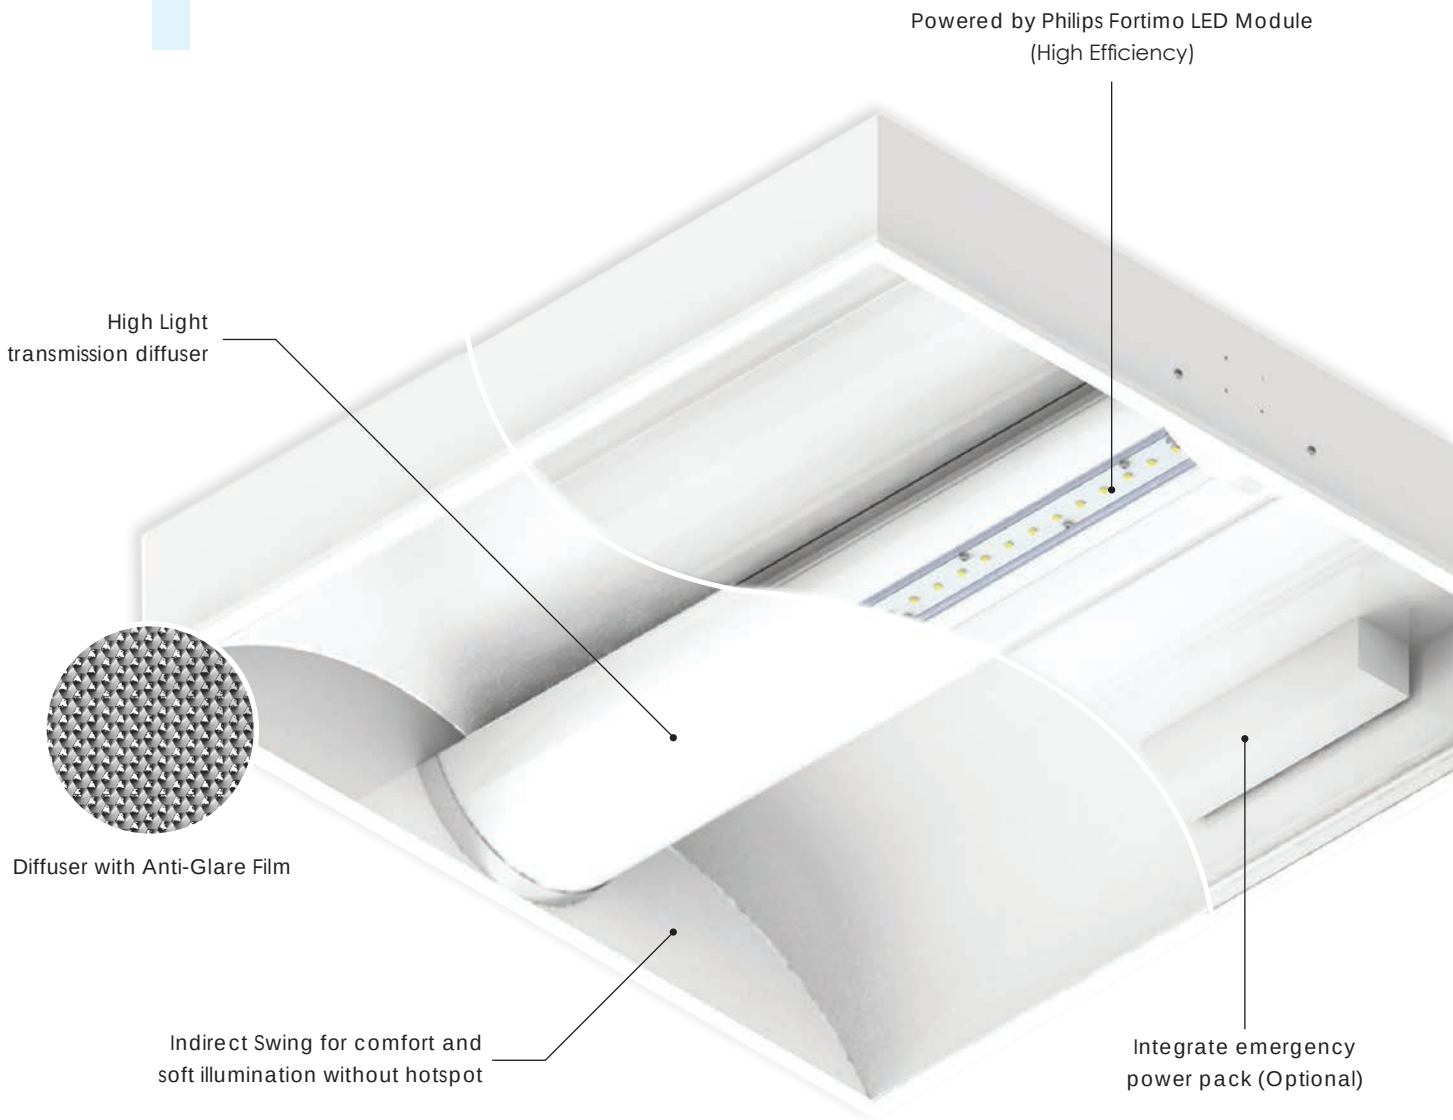


DIP (595 x 595 mm)

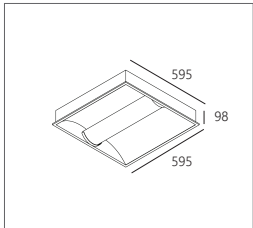

Diffuser
578 x 578




Anti Glare Microfilm
578 x 578




Metal Mesh
578 x 578

2700-6500K / CRI 90			
11.3W / 2114lm or 16.3W / 3020lm / 220-240V			
	Diffuser	Anti Glare Microfilm	Metal Mesh
11.3W	MX 7398-G6-TW-11W-	MX 7496-G6-TW-11W-	MX 7498-G6-TW-11W-
16.3W	MX 7398-G6-TW-17W-	MX 7496-G6-TW-17W-	MX 7498-G6-TW-17W-
80 (White)			


DIP (1195 x 595 mm)

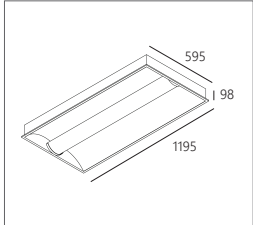

Diffuser
1178 x 578

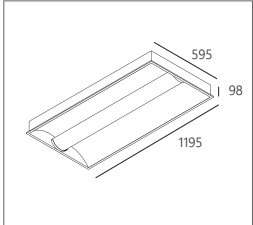

Anti Glare Microfilm
1178 x 578

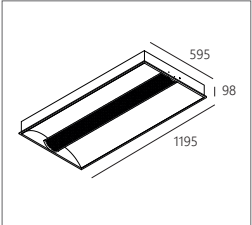

Metal Mesh
1178 x 578

2700-6500K / CRI 90			
22.8W / 4228lm or 32.5W / 6040lm / 220V			
	Diffuser	Anti Glare Microfilm	Metal Mesh
22.8W	MX 7399-G6-TW-23W-	MX 7497-G6-TW-23W-	MX 7499-G6-TW-23W-
32.5W	MX 7399-G6-TW-33W-	MX 7497-G6-TW-33W-	MX 7499-G6-TW-33W-
80 (White)			



DIP (Diffuser Version)



DIP (Anti Glare Microfilm Version)




DIP (Metal Mesh Version)



Club


Club



Standard		
2700-6500K / CRI 90		
10.5W / 1260lm / 300mA		
18°	26°	45°
MX 7642-G6-TW9-18-◊	MX 7642-G6-TW9-26-◊	MX 7642-G6-TW9-45-◊
◊ 80 (White) / 10 (Black)		
Driver : DA / DC		

Xicato		
2700-6500K / CRI 90		
10.3W / 885lm / 300mA		
18°	26°	45°
MX 7642-G6-12OBTW-18-◊	MX 7642-G6-12OBTW-26-◊	MX 7642-G6-12OBTW-45-◊
◊ 80 (White) / 10 (Black)		
Driver : DA / DC		

Club Adjustable



Standard		
2700-6500K / CRI 90		
10.5W / 1260lm / 300mA		
18°	26°	45°
MX 7641-G6-TW9-18-◊	MX 7641-G6-TW9-26-◊	MX 7641-G6-TW9-45-◊
◊ 80 (White) / 10 (Black)		
Driver : DA / DC		

Xicato		
2700-6500K / CRI 90		
10.3W / 885lm / 300mA		
18°	26°	45°
MX 7641-G6-12OBTW-18-◊	MX 7641-G6-12OBTW-26-◊	MX 7641-G6-12OBTW-45-◊
◊ 80 (White) / 10 (Black)		
Driver : DA / DC		




Club




Multi Box Mini


Multi Box Mini

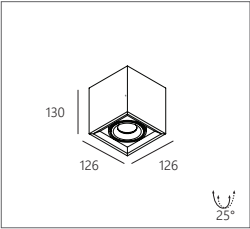

SQUARE (1 HEAD)




SQUARE (2 HEADS)



SQUARE (3 HEADS)

Standard			
2700-6500K / CRI 90			
9W / 1030lm / 500mA			
15°	24°	36°	
Square (1 Head)	MX 7334S-G5-TW9C-15-◊	MX 7334S-G5-TW9C-24-◊	MX 7334S-G5-TW9C-36-◊
Square (2 Heads)	MX 7334D-G5-TW9C-15-◊	MX 7334D-G5-TW9C-24-◊	MX 7334D-G5-TW9C-36-◊
Square (3 Heads)	MX 7334T-G5-TW9C-15-◊	MX 7334T-G5-TW9C-24-◊	MX 7334T-G5-TW9C-36-◊
◊ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DB / DD			
Accessories : viiii			
Xicato			
2700-6000K / CRI 95			
8.8W / 771lm / 250mA			
15°	24°	36°	
Square (1 Head)	MX 7634S-G6-09OBTWC-15-◊	MX 7634S-G6-09OBTWC-24-◊	MX 7634S-G6-09OBTWC-36-◊
Square (2 Heads)	MX 7634D-G6-09OBTWC-15-◊	MX 7634D-G6-09OBTWC-24-◊	MX 7634D-G6-09OBTWC-36-◊
Square (3 Heads)	MX 7634T-G6-09OBTWC-15-◊	MX 7634T-G6-09OBTWC-24-◊	MX 7634T-G6-09OBTWC-36-◊
◊ 80B (White Housing & Black Body) / 80W (White Housing & Body) / 10B (Black Housing & Body)			
Driver : DA / DC			
Accessories : viiii			

Multi Box Life Adjustable



Standard			
2700-6500K / CRI 90			
7.2W / 975lm / 400mA			
15°	24°	36°	
MX 7615-G6-TW9C-15-◊	MX 7615-G6-TW9C-24◊	MX 7615-G6-TW9C-36-◊	
◊ 82 (White Body & Black Reflector) / 84 (White Body & Silver Reflector) / 12 (Black Body & Reflector) / 14 (Black Body & Silver Reflector)			
Driver : DB / DD			
Accessories : viiii			
Xicato			
2700-6000K / CRI 95			
7W / 614lm / 200mA			
15°	24°	36°	
MX 7615-G6-09OBTWC-15-◊	MX 7615-G6-09OBTWC-24◊	MX 7615-G6-09OBTWC-36-◊	
◊ 82 (White Body & Black Reflector) / 84 (White Body & Silver Reflector) / 12 (Black Body & Reflector) / 14 (Black Body & Silver Reflector)			
Driver : DA / DC			
Accessories : viiii			




Multi Box Mini Square (2 Heads)




S-Extal


S-Extal



L 600mm



L 900mm



L 1200mm

2700-6500K / CRI 90			
	13W / 1400lm / 24V	19W / 2100lm/ 24V	25W / 2800lm/ 24V
L 600mm	MX 5508D9P-G3-TW-600-⌀	-	-
L 900mm	-	MX 5508D9P-G3-TW-900-⌀	-
L 1200mm	-	-	MX 5508D9P-G3-TW-1200-⌀
⌀ B (Black) / W (White)			
Driver : DE / DF / DG			




S-Extal

For further details, please refer to page 142 - 143




B-Extal


B-Extal



L 600mm



L 900mm



L 1200mm

	2700-6500K / CRI 90		
	13W / 1400lm / 24V	19W / 2100lm/ 24V	25W / 2800lm/ 24V
L 600mm	MX 5510D9P-G3-TW-600- ϕ	-	-
L 900mm	-	MX 5510D9P-G3-TW-900- ϕ	-
L 1200mm	-	-	MX 5510D9P-G3-TW-1200- ϕ
ϕ B (Black) / W (White)			
Driver : DE / DF / DG			




B-Extal

For further details, please refer to page 142 - 143


LED Strip Dual

LED Strip Dual (5M)



2700-4000K / CRI 90
13.2W/m / 1450lm/m / 12V
MX 6463-92740K-12V-5000
Driver : DE / DF / DG
* Custom made power and length upon request

LED Strip Dual IP65 (5M)



2700-4000K / CRI 90
13.2W/m / 1450lm/m / 12V
MX 6464-92740K-12V-5000
IP65
Driver : DE / DF / DG
* Custom made power and length upon request



LED Strip Dual



LED Strip Dual (IP65)

For further details, please refer to page 142 - 143

Appendix

Driver Information | Luminaire Components | Accessories |
Light Bulb | Ceiling Canopy Kits

Driver Information

	Product	Product Code	Watt	Size
DA	LED POWER SUPPLY 120mA - 350mA Dali TW	EC-LED-SETmA-12Da-TW-EU(41)	12W	43mm (W) x 150mm (L) x 29mm (H)
DB	LED POWER SUPPLY 350mA - 700mA Dali TW	EC-LED-SETmA-20Da-TW-EU(41)	20W	43mm (W) x 150mm (L) x 29mm (H)
DC	LED POWER SUPPLY 120mA - 350mA 1-10V TW	EC-LED-SETmA-12D-TW-EU(41)	12W	43mm (W) x 150mm (L) x 29mm (H)
DD	LED POWER SUPPLY 350mA - 700mA 1-10V TW	EC-LED-SETmA-20D-TW-EU(41)	20W	43mm (W) x 150mm (L) x 29mm (H)
DE	LED POWER SUPPLY 12V 60W Dali TW	EC-LED-12V-75D-TW-EU(38)	60W	40mm (W) x 295mm (L) x 32mm (H)
DF	LED POWER SUPPLY 12V 150W Dali TW	EC-LED-12V-150D-TW-EU(38)	120W	40mm (W) x 360mm (L) x 32mm (H)
DG	LED POWER SUPPLY 12V 150W 1-10V TW	EC LED-12V-150D-TW-LH(41)	120W	43mm (W) x 352mm (L) x 30mm (H)
DH	LED POWER SUPPLY 500mA-DC 2CH TW DIM5	21012 0355	20W	79mm (W) x 111mm (L) x 24mm (H)
DI	LED POWER SUPPLY 48V-DC / 100W DIN	300 89 48 100	100W	55mm (W) x 100mm (L) x 90mm (H)
DJ	LED POWER SUPPLY 48V-DC / 240W DIN	300 89 48 240	240W	63mm (W) x 114mm (L) x 125mm (H)

Luminaire Components


	Accessory	Product Code	Colour Option
IA	Mounting Kit Entero RD-S O.F.A	28400 0010	
IB	Mounting Kit Entero SQ-S O.F.A	28400 0040	
IC	Mounting Kit Entero RD-M O.F.A	28400 0020	
ID	Mounting Kit Entero SQ-M O.F.A	28400 0050	
IE	Mounting Kit Entero RD-L O.F.A	28400 0030	
IF	Mounting Kit Entero SQ-L O.F.A	28400 0060	
IG	Mounting Kit Spy 39/52 Trimless O.F.A.	15212 2030	
IH	SPY 52 Tube	19810 0100 	 B (Black) / FBR (Flemish Bronze) / FG (Flemish Gold) / GC (Gold Colored) / W (White)
II	SPY 66 Tube	24611 0100 	 B (Black) / FBR (Flemish Bronze) / FG (Flemish Gold) / GC (Gold Colored) / W (White)
IJ	SPY90 Tube	19810 0170 	 B (Black) / FBR (Flemish Bronze) / FG (Flemish Gold) / GC (Gold Colored) / W (White)
IK	Trimless Installation Kit	MX TIK41LT 	 00B (Black) / 80W (White)

Accessories

Collection	Accessory	Product Code	Colour Option	Remark
i	Entero S Glass SBL	28500 0040		
	Entero S Honeycomb Double Use	28500 0060 	 B (Black)	Not Available for Entero Small X
	Entero S Honeycomb Single Use	28500 0050 	 B (Black)	
	Entero S Linear Spread Lens	28500 0010		
	Entero S Softening Lens	28500 0030		
	Entero S Spread Lens	28500 0020		
ii	Entero M Glass SBL	28500 0010		
	Entero M Honeycomb Double Use	28500 0120 	 B (Black)	Not Available for Entero Medium X
	Entero M Honeycomb Single Use	28500 0110 	 B (Black)	
	Entero M Linear Spread Lens	28500 0070		
	Entero M Softening Lens	28500 0090		
	Entero M Spread Lens	28500 0080		
iii	Entero L Glass SBL	28500 0160		
	Entero L Honeycomb Double Use	28500 0180 	 B (Black)	Not Available for Entero Large X
	Entero L Honeycomb Single Use	28500 0170 	 B (Black)	
	Entero L Linear Spread Lens	28500 0130		
	Entero L Softening Lens	28500 0150		
	Entero L Spread Lens	28500 0140		
iv	HONEYCOMB 42 SINGLE USE	19810 0010 	 B (Black)	
	SPREAD LENS 42	19810 0030		
	LINEAR SPREAD LENS 42	19810 0020		
	SOFTENING LENS 42	19810 0040		
	GLASS SBL 42	19810 0050		
	HONEYCOMB 57 SINGLE USE	24611 0150 	 B (Black)	
v	HONEYCOMB 57 DOUBLE USE	24611 0210 	 B (Black)	
	SPREAD LENS 57	24611 0200		
	LINEAR SPREAD LENS 57	24611 0170		
	SOFTENING LENS 57	24611 0190		
	GLASS SBL 57	24611 0160		
vi	HONEYCOMB 75 SINGLE USE	19810 0110 	 B (Black)	
	HONEYCOMB 57 DOUBLE USE	19810 0120 	 B (Black)	
	SPREAD LENS 57	24611 0200		
	LINEAR SPREAD LENS 57	24611 0170		
	SOFTENING LENS 57	24611 0190		
	GLASS SBL 57	24611 0190		
vii	Connection ST	15225 0360 	 B (Black) / W (White)	
	Suspension ST	15225 0340 	 B (Black) / W (White)	
	Cable Base R	203 99 55 	 ANO (Anodised) / B (Black) / W (White)	
	Coverset R 62	204 00 62 	 ANO (Anodised) / B (Black) / W (White)	
	Coverset R 90	204 00 90 	 ANO (Anodised) / B (Black) / W (White)	
	Coverset R 120	204 00 100 	 ANO (Anodised) / B (Black) / W (White)	
viii	Frosted Glass Diffuser	MX 9924		
	Obscured Glass Diffuser	MX 9925		
	Linear Spread Glass Diffuser	MX 9958		
	Black Honey Comb Lourve	MX 9955		
ix	Frosted Glass Diffuser	MX 9980		
	Obscured Glass Diffuser	MX 9981		
	Linear Spread Glass Diffuser	MX 9982		
	Black Honey Comb Lourve	MX 9983		


Light Bulb

E14 Smart White




CC-1016964
CRI 95
2200-4500K
8W
560lm

E27Smart White



LD-E27TW-CAS
CRI 95
2200-6500K
8W
640lm


E27 RGB + TW



LD-E27RGBCW-CAS
CRI 95
2200-6500K and RGB
8W
640lm


Ceiling Canopy Kits

Single Mini



R02L01 ∅00
∅ 10 (Matte White) / 20 (Matte Black) / 35 (Coppery Bronze) / 40 (Chrome) / 45 (Matte Champagne)
*more options on request

3 Light Round



R04L03 ∅00
∅ 10 (Matte White) / 20 Matte White)
*more options on request

Zodiac 歷程照明有限公司

ZODIAC LIGHTING LIMITED

Head Office - Project Team

1801, 18/F, Hong Man Industrial Centre, 2 Hong Man Street,
Chai Wan, Hong Kong.

香港柴灣康民街2號康民工業中心18樓1801室

Tel: (852) 2898 9023 Fax: (852) 2558 3114

E-mail: mail@zodiaclighting.com

Showroom

Zodiac

G/F & 1/F, Amber Commercial Building, 70-74 Morrison Hill Road,
Wan Chai, Hong Kong.

香港灣仔摩利臣山道70-74號凱利商業大廈地下及一樓

Tel: (852) 2882 9082 Fax: (852) 2504 4466

E-mail: showroom-1t@zodiaclighting.com

www.zodiaclighting.com

Specification

For continuous product development, the company reserves the right to amend, totally or partially, any specification herein detailed without prior notice.

Photometric data

The illuminance value and cone performance state in the photometric data is for reference only. Actual execution should affect by real situation.