



Luci

LED LIGHTING
CATALOG
2023

INDEX

2	About Luci	What's Luci / Strength Luci
4	About Luci	Project List
6	Choose by	Lamp fitting list
20	Choose by	Product size & Brightness
28	Choose by	Application

Indoor

Strip Light

32	UQ FLEX	NEW	Dotless flexible linear light with top/side bend, connectable max. 10m per run
46	Power FLEX EX		High efficacy type, various LED pitch and wattage
56	Power FLEX Spect C		Ideal for display light which needs quality light such as luxury goods or artwork
60	Power FLEX		Ideal for shelf light with small cuttable unit
68	Power FLEX THOF®	RENEWAL	Dynamic white tape light, free to select CCTs
74	Flat FLEX F		Low brightness top bend strip light, ideal for furniture light
82	Power FLEX α		Side bend type for curved shape cove light
88	FLEX α F		Low brightness side bend strip light, ideal for skirting light

Rigid Light

96	Vivoxo Graze	RENEWAL	Wall grazing light with small section size with High CRI >90
104	Vivoxo Graze THOF®	NEW	Dynamic white wall grazing light with small section size, free to select CCTs
112	RECTA		Square shape of three surface emission with high brightness, dotfree
118	THOF®	RENEWAL	Dynamic white type of square homogeneous rigid light, free to select CCTs
124	Creide® lens / F		Low height crescent shape light with narrow/wide-angle, ideal for cove light
134	silux® K		Squared shape small section light for shelf, dotfree
144	silux® wide K		Quarter circular shape light for wider light distribution for shelf, dotfree
154	nano line		Only 5mm light emission surface for recessed linear light, dotfree



Meyer House
 Client: Secure Venture Development (No.1) Pte Ltd
 Architect: WOHA Architects
 Lighting Designer: Light Collab
 Photography: ND Photography

Outdoor

Strip Light

162	Vivoxy FLEX IP67	NEW	Flexible wall grazing light for curved facade
170	UQ SAUNA IP67	NEW	Ideal for Sauna, flexible semi-diffused linear light
176	UQ FLEX IP67	RENEWAL	Dotless flexible linear light with top/side bend, connectable max. 10m per run
190	Power FLEX EX IP65		High efficacy type, various LED pitch and wattage
196	Power FLEX IP65		Small cuttable unit with maximum 5m custom length
202	Flat FLEX F IP65		Low brightness top bend strip light, ideal for night light in hotel bathroom, ideal for cove light
208	FLEX α F IP65		Low brightness side bend strip light, ideal for handrail and landscape.

Rigid Light

214	EFRO IP65		Moisture-proof ideal for bathroom and semi-outdoor, dotless
222	Power LEDs Line IP65		Compact yet powerful Outdoor grazer
228	LEDs Bar IP65		3 surface emitted, completely dotless ideal for recessed linear light on the wall
234	LEDs Line IP67		UV protected facade Semi-diffused ideal for outline of the building

240	Dimmer & Configurations
246	Power supplies
253	CE Declaration of Conformity
254	Attention
256	Choose by Model No. INDEX

What's Luci / Strength Luci

History of Luci

Established as a lighting division of PROTERAS Co. Ltd., in 2004. Luci has since gained international awe for its impeccable range of lighting products from Japan.

Considerably a young brand in the market. Luci is proud to be recognized as the brand of choice by the majority. With that, Luci is very pleased to have a number of impressive project references to share with the world. All this is possible as a result of undeniable fighting spirit by the pioneers of the company from the beginning of Luci. Along with the strong & active support of the industry. Luci will continue to strive for perfection in every project to come.

2004 - Established Luci brand in Contents Co., Ltd. in Tokyo
 2009 - Luci (Shanghai) Lighting Technology established
 2010 - Company name was changed to PROTERAS Co., Ltd.
 2011 - Beijing office established
 2012 - Luci Pte. Ltd. in Singapore and Hong Kong established
 2015 - Luci Co., Ltd. established



Strength Luci

Design Policy

Our in-house research and development team design our products from concept to appearance and choosing materials. We pursue high usability through simple and minimum designs that provide both an attractive price and good function. More than 15 cases of the uniquely designed products by Luci have been patented in Japan, demonstrating that they have been able to bring customers' needs to market quickly.

Quality control

We conduct strict reliability tests at internal and third parties based on JIS standards and CE mark standards.

Product range


Since the release of FLEX series in Japan in 2004, we have developed and sold products such as homogenous rigid light and wall graze light etc. in response to the architectural and interior market needs. Today, we are developing not only architectural lighting but also functional lighting such as LED insect traps, inspection lighting with CRI97 for printing and manufacture industry, and our original switching power supplies.

Warranty period

Luci standard warranty period is 2 or 3 years from shipping date. If the LED fixture has trouble during this period, we will repair or replace it free of charge. In case of the requirement of the warranty period, we will provide up to 5 years warranty after consulting the installation environment and usage hours per day. Please refer to the appendix in this catalogue for further detail.


Product development and improvement process

We develop new products and improve the existing products in a collaboration between sales, development, and quality control team. Design review is carried out speedily at the appropriate time, and new products launch with the results of reliability tests. Also, to maintain the quality of products at the factory, we regularly review and have an inspection after release, and update the products and materials depending on technical improvement.

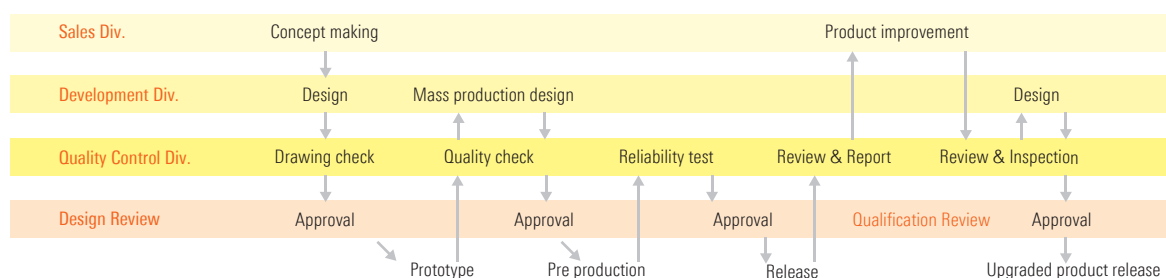

Luci brand global network

Our offices are located in Tokyo, Osaka, Singapore, Hong Kong, Shanghai, Beijing and South Korea. We've supplied our products to more than 30 countries including Europe and the Middle East by working with local distributors. Even if the designer and the location of the project are in different countries, we use the Luci brand network to closely communicate information and support the success of your project.

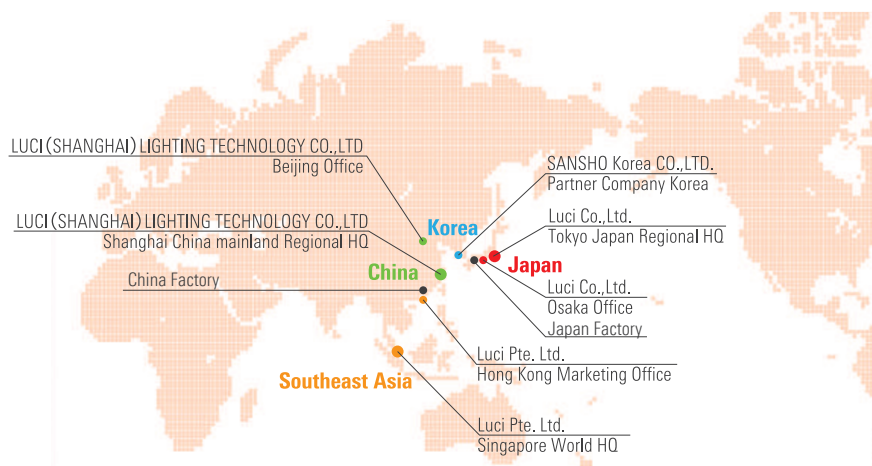


What's Luci / Strength Luci

Color Management

► ANSI Bin

The LED package that we select by color coordinates are procured for each rank and these are not mixed with other ranks when being mounted on circuit boards. Inventory and shipment is managed each LED rank. In addition, a visual color inspection of all unit is conducting before shipping.

Please note that the color temperature of some of products sold by Luci are outside the industry standard to meet the needs of customers. Luci original rules has been set for these.

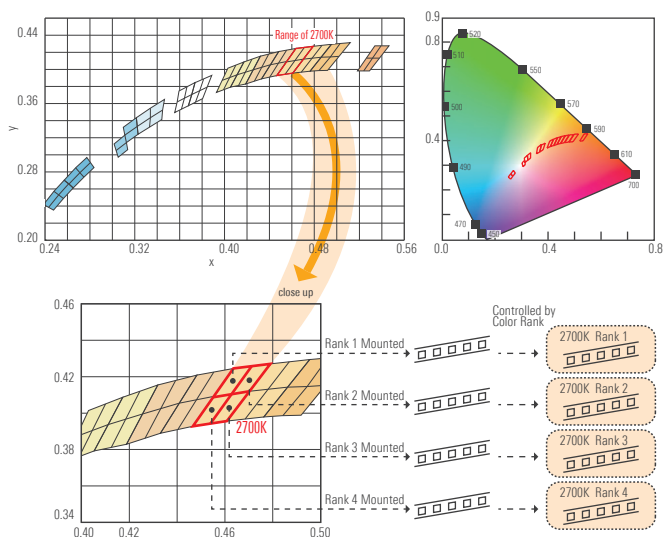


► MacAdam 3 step

Part of Luci's new products and improved products have adopted the MacAdam 3 steps LED package which is said the color is more uniform and consistent.

"MacAdam ellipses" is a standard derived from visual color matching experiments and shows the standard deviation of the color discrimination variations from a specific centre color on the xy chromaticity diagram.

The standard deviation shown with the "MacAdam ellipses" does not indicate a color difference distinguishable by the average human eye, but in another experiment MacAdam found that the color discrimination threshold is about three times (3-Step) the standard deviation.

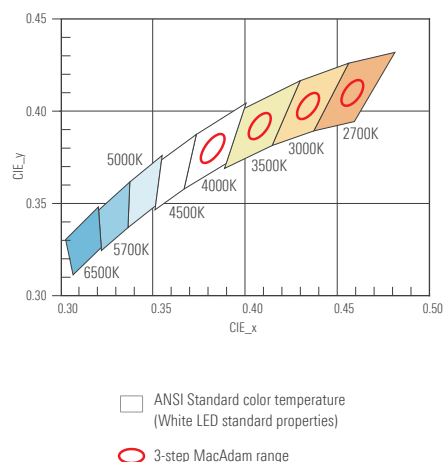

Variety of Color temperature

Nominal color temperature variation

		D	N	W	WW	L30	L27	L24	L21	L19
Power FLEX	P.60									
Power FLEX THOF	P.68									
Flat FLEX F	P.74									
Power FLEX α	P.82									
FLEX α F	P.88									
Vivoxo Graze	P.96								L22	
Vivoxo Graze THOF	P.104								L22	
nano line	P.154									
Power LEDs Line IP65	P.222									
LEDs Line IP67	P.234									

* Please check the product specification in detail.

* The actual color temperature may vary depends on product series.

Variety of Color temperature

Nominal color temperature variation

		D	N	W	WW	L30	L27	L24	L21	L19
UQ FLEX, UQ FLEX α	P.32/176									
Power FLEX EX	P.46									
Power FLEX Spect C	P.56									
Vivoxo Graze	P.96									
Vivoxo Graze THOF	P.104									
RECTA	P.112									
THOF	P.118									
Creide lens / Creide F	P.124									
silux K / silux wide K	P.134/144									
Vivoxo FLEX IP67	P.162								L22	
UQ Sauna IP67	P.170									
EFRO	P.214									
LEDs Bar IP65	P.228									

Design support

We regularly release the project reference and application book that includes the tips of installation to get the best performance of the lightings. For calculation, ies file of all products could be downloaded on our website.

In the case of customised requirement, our sales and design team will support the designer.

Showroom



Singapore office & Show room




Hong Kong Show room

Planning and customer support

This catalog covers all of the installation cross-section sizes, required mounting parts and also notes on installation. We would provide a free demo sample on your request as we believe the quality of light can not be compared only by seeing the specifications.


Our inbound sales team can respond to emails within short notice. Any inquiries are welcomed at info@luci.co.jp



HoteLuci



WEB site



lux distribution

Project List



A
SIA Kris Flyer Lounge
 Location: Singapore
 Lighting Design: Light Direction Singapore
 Architect: HBA



B
THE QUAYSIDE
 Location: Hong Kong
 Lighting Design: LIGHTLINKS INTERNATIONAL LIMITED



C
Shanghai Shui On Plaza
 Location: China




D
Mia Saigon, Luxury Collection Hotel
 Location: Vietnam
 Lighting design: LUMINO DESIGN



E
Chinese Restaurant at Hilton Colombo
 Location: Sri Lanka
 Architect office: Nu Studio
 Lighting design: BO Steiber Lighting Design
 Construction: Access Projects



F
Rosewood Cambodia Chinese Restaurant
 Location: Cambodia
 Owner: Vattanac Properties
 Interior Design: Vattanac Properties

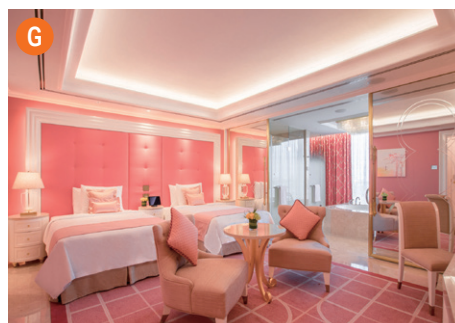

G
OKADA Manila
 Location: Philippines
 Architect Office: MIURASHIN ARCHITECT+ASSOCIATES
 Lighting Design : Christine Sicangco Lighting Design Inc
 Photo by: John Daryl Ocampo



H
JG Dubai
 Location: Dubai
 Architects Office: Curiosity
 Lighting Design: L'Observatoire International
 Construction: RK Gulf LLC
 Photo: Nacasa & Partners Inc.




Singapore	Gardens by the Bay	Vietnam	MOVENPICK HOTEL
	Victoria Theatre		Hilton Saigon
	National Art Gallery		Sheraton Danang
	Atlas Bar - Park View Square		Vingroup Resorts
	PLQ		Takashimaya Saigon Centre
	Google office	Cambodia	Rosewood Cambodia
	States Court	Indonesia	Menara Astra
	SIA Krisflyer Lounge		TOTO Building
	79 Anson Road		Verde Two
	SMU Extension		Trinity tower
China	Bugis Junction		Pakubuwono Spring
	Shanghai Dongjiao State Guest Hotel Meeting Center		InterContinental Jakarta Pondok Indah
	Taikoo Li Qiantan Shanghai	Malaysia	Genting Casino T2B
	Shanghai Times Square		The Ritz-Carlton, Langkawi
	Wework Shanghai Office		ABC Cooking Studio at Pavilion
	Wuxi qiangxiang Villa		Melawati Mall
	Shanghai Tomson Riviera Villa		The RuMa
	Shanghai Merchants Building		Dewakan restaurant
	Suzhou River landscape in Shanghai Shanxi Rd	Thailand	ICON SIAM
	Audi House of Progress Shanghai		SIAM TAKASHIMAYA
Hong Kong	Plaza 336 Building		Bangkok Thailand Temple
	Ocean Park Marriot Hotel		Sindhorn Kempinski Residence
	Novotel Century Wanchai	Brunei	ROYAL BRUNEI LOUNGE
	Hong Kong Jocky Club		The Okura Prestige Yangon
	Hong Kong Disneyland Hotel	Myammer	Rosewood Yangon
	The Lohas		OKADA Manila
	Goldman Sachs office		Ayala Mall Cebu
	Skycity		Proscenium at Rockwell
	Nam Cheong Station Driveway & Drop-Off		SMART
	FLEUR ISLAND		ArthaLand Century Pacific Tower
Macau	The Peak Tram Terminus	Philippines	Solaire Resort and Casino
	Hong Kong International Airport		TAJ VIVAANTA , BHOPAL
	MGM Cotai		Lupin office
	Wynn Macau		The Oberoi, New Delhi
	Studio City Iconic Hotel		Hilton Colombo
Taiwan	The Wings of The World, Taichung	Sri Lanka	Radisson Blu Chittagong Bay View
	GIVENCHY Breeze Xinyi Store	Bangladesh	Four Seasons Voavah
Japan	ANA Crown Plaza Hotel Osaka	Maldives	Shangri-la Hotel
	TOKYO MIDTOWN HIBIYA	Mauritius	Shangri-la Hotel Sydney
	The Prince Gellery Tokyo Kioicho	Australia	Arup Sydney office
	La Locanda at The Ritz-Carlton, Kyoto		Quay Quarter Tower
	ROKU KYOTO, LXR Hotels & Resorts		One Za'abeel
	InterContinental Yokohama Pier 8		Royal Atlantis
	Mitsui Garden Hotel Jingugaien Tokyo Premier		BVLGARI RESORT DUBAI
	Tokyo Bay Shiomi Prince Hotel		The District Tower
Korea	Signiel Hotel	Bahrain	Sheraton Baku Airport Hotel
	Josun Palace	Azerbaijan	Al Bustan Palace Hotel
	Paradise Hotel & Resort, Incheon	Oman	Hamad Internation Airport Terminal Expantion
	LEGO LAND	Qatar	Seef Lusail Doha
	Korean Air T2 Lounge		Hyatt Regency
Europe	SHIATZY CHEN PARIS		Four Seasons
	London Marriott Hotel Regents Park		Grand Hyatt Kuwait Chinese restrant
	Ace Hotel		Club Dining Beirut
Turkey	Roka Istanbul	Lebanon	Uganda Pedestrian Deck
		Uganda	

Lamp fitting list


Indoor

Strip Light

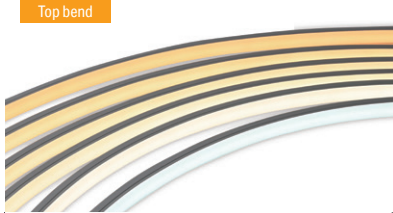			
Product name	New Luci UQ FLEX (15.8W/m)	Discontinue New Luci UQ FLEX (12.6W/m)	New Luci UQ FLEX (8.4W/m)
LED pitch	-	-	-
Model No. Description page	LFU-T * * * * -DF-I-15 P.34	LFU-T * * * * -DF-I-12 P.34	LFU-T * * * * -DF-I-8 P.34
Custom order	○	○	○
Max. customised Length	5m	5m	5m
Diffuser Tube	○	○	○
Input voltage	DC24V	DC24V	DC24V
Power consumption	15.8 W/m	12.6 W/m	8.4 W/m
Dimension	(Length)x16x15mm	(Length)x16x15mm	(Length)x16x15mm
LED beam angle	—	—	—
Max. length per circuit	10m	10m	10m
Cuttable unit	50mm	50mm	50mm
Delivered CCT	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent		
D 6000K Ra92	* 908 lm	* 724 lm	* 483 lm
N - -	* -	* -	* -
W 4000K Ra93	○ 921 lm	○ 734 lm	○ 490 lm
WW 3200K Ra93	○ 856 lm	○ 683 lm	○ 455 lm
L30 2700K Ra94	○ 774 lm	○ 617 lm	○ 411 lm
L27 2500K Ra93	○ 781 lm	○ 623 lm	○ 415 lm
L24 2300K Ra93	○ 718 lm	○ 573 lm	○ 382 lm
L21 - -	* -	* -	* -
L19 - -	* -	* -	* -

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Cross-sectional sizes
when mounted
scale=1:1

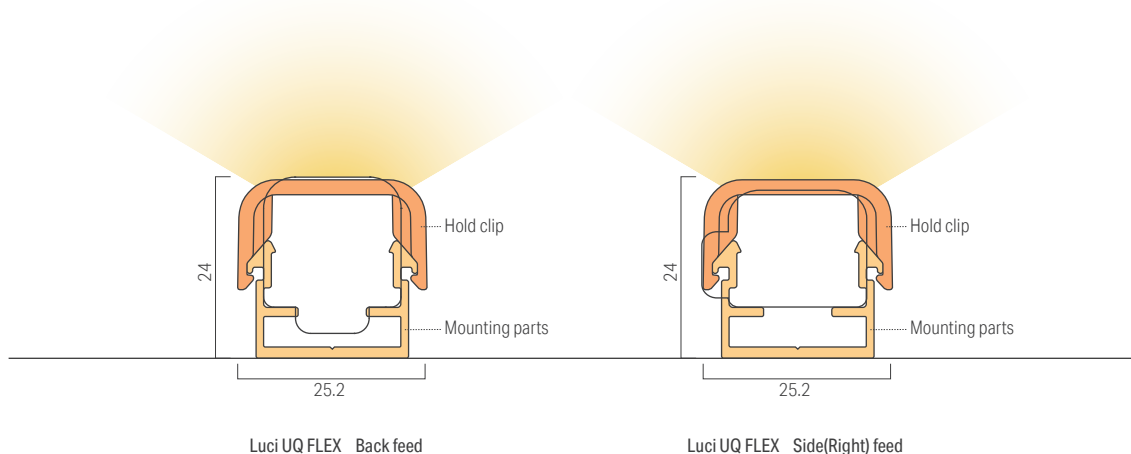


Indoor
Strip Light

Product name	New Luci UQ FLEX α (15.8W/m)	New Luci UQ FLEX α (12.6W/m)	New Luci UQ FLEX α (8.4W/m)
LED pitch	-	-	-
Model No. Description page	LFUA-T * * * * -DF-I-15 P.36	LFUA-T * * * * -DF-I-12 P.36	LFUA-T * * * * -DF-I-8 P.36
Custom order	○	○	○
Max. customised Length	5m	5m	5m
Diffuser Tube	○	○	○
Input voltage	DC24V	DC24V	DC24V
Power consumption	15.8 W/m	12.6 W/m	8.4 W/m
Dimension	(Length)x16x15mm	(Length)x16x15mm	(Length)x16x15mm
LED beam angle	—	—	—
Max. length per circuit	10m	10m	10m
Cuttable unit	50mm	50mm	50mm
Delivered CCT	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent		
D 6000K Ra92	* 687lm	* 548lm	* 365lm
N - -	* -	* -	* -
W 4000K Ra93	○ 694lm	○ 553lm	○ 369lm
WW 3200K Ra93	○ 632lm	○ 504lm	○ 336lm
L30 2700K Ra94	○ 573lm	○ 457lm	○ 305lm
L27 2500K Ra93	○ 561lm	○ 448lm	○ 298lm
L24 2300K Ra93	○ 522lm	○ 416lm	○ 278lm
L21 - -	* -	* -	* -
L19 - -	* -	* -	* -

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Cross-sectional sizes
when mounted
scale=1:1

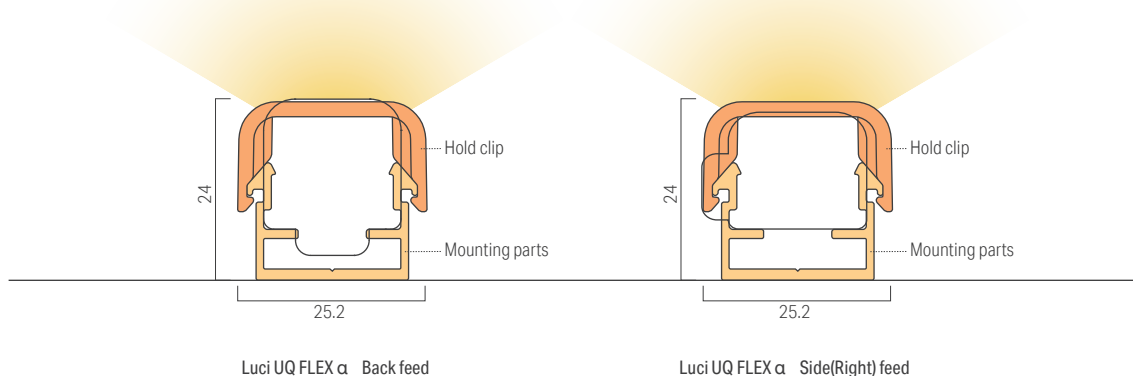

Lamp fitting list

Indoor

Strip Light




Product name

Discontinued Luci Power FLEX EX

LED pitch	15mm pitch	20mm pitch	30mm pitch (9.5W)	30mm pitch (6.5W)	30mm pitch (4.5W)
Model No. Description page	LFPEX15-1000-* -CL-I P.46	LFPEX20-1000-* -CL-I P.46	LFPEX30-1000-* -CL-I-9 P.46	LFPEX30-1000-* -CL-I-6 P.46	LFPEX30-1000-* -CL-I-4 P.46
Custom order	○	○	○	○	○
Max. customised Length	5m	5m	5m	5m	5m
Diffuser Tube	N/A	N/A	N/A	N/A	N/A
Input voltage	DC24V	DC24V	DC24V	DC24V	DC24V
Power consumption	18.2W/m	12.1W/m	9.5W/m	6.5W/m	4.5W/m
Dimension	1011x15x4.5mm	1011x15x4.5mm	1011x15x4.5mm	1011x15x4.5mm	1011x15x4.5mm
LED beam angle	120°	120°	120°	120°	120°
Max. length per circuit	5m	5m	5m	5m	5m
Cuttable unit	83.2mm (6 LED)	125mm (6 LED)	166.2mm (6 LED)	166.2mm (6 LED)	166.2mm (6 LED)
Light source color	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent				
D 6500K	-	-	-	-	-
N 5300K Ra92	* 1692lm	* 1150lm	* 847lm	* 536lm	* 405lm
W 4200K Ra93	○ 1680lm	○ 1125lm	○ 812lm*	○ 556lm*	○ 388lm*
WW 3500K Ra93	○ 1620lm	○ 1101lm	○ 704lm*	○ 564lm*	○ 337lm*
L30 3000K Ra94	○ 1493lm	○ 1008lm	○ 644lm*	○ 522lm*	○ 308lm*
L27 2700K Ra93	○ 1496lm	○ 1016lm	○ 643lm*	○ 516lm*	○ 307lm*
L24 2400K Ra93	○ 1260lm	○ 856lm	○ 592lm*	○ 494lm*	○ 283lm*
L21 2100K Ra93	* 1100lm	* 748lm	* 550lm	* 348lm	* 263lm
L19 1900K Ra63	* 1405lm	* 955lm	* 703lm	* 445lm	* 336lm




Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Cross-sectional sizes
when mounted
scale=1:1



Luci Power FLEX EX

Indoor
Strip Light


			
Product name	Luci Power FLEX Spect C	Discontinued Luci Power FLEX	Discontinued Renewal Luci Power FLEX THOF
LED pitch	20mm pitch	15mm pitch	20mm pitch
Model No. Description page	LFPSC20-1000-* - CL-I P.56	LFP15-0900-* - CL-I P.60	LFP20-1000-* - CL-I P.60
Custom order	—	○	○
Max. customised Length	—	4.5m	5m
Diffuser Tube	—	○	○
Input voltage	DC24V	DC24V	DC24V
Power consumption	14.2W/m	15.4W/m	10.5W/m
Dimension	1011x15x4.5mm	911x15x4.5mm	1011x15x4.5mm
LED beam angle	120°	120°	120°
Max. length per circuit	5m	4.5m	5m
Cuttable unit	125mm (6 LED)	30mm (2 LED)	40mm (2 LED)
Light source color	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent		
D	7100K (6500K) Ra 97 * 817 lm	Ra 90 * 875 lm	Ra 90 * 698 lm
N	5300K (5000K) Ra 97 * 869 lm	Ra 90 * 875 lm	Ra 90 * 639 lm
W	4200K -	Ra 90 ○ 818 lm	Ra 90 ○ 667 lm
WW	3500K -	Ra 90 ○ 774 lm	Ra 90 ○ 639 lm
L30	3000K -	Ra 90 ○ 710 lm	Ra 90 ○ 579 lm
L27	2700K -	Ra 90 ○ 711 lm	Ra 90 ○ 563 lm
L24	2400K -	Ra 90 ○ 608 lm	Ra 90 ○ 459 lm
L21	2100K -	-	-
L19	1900K -	Ra 70 * -	Ra 70 * 512 lm
B	Blue -	*	*

NL27 5300K~2700K○
Dimming rate
N 100% L27 0% Ra 89 / 360 lm
N 100% L27 100% Ra 90 / 660 lm
N 0% L27 100% Ra 86 / 326 lm

L30L19 3000K~1900K○
Dimming rate
L30 100% L19 0% Ra 89 / 322 lm
L30 100% L19 100% Ra 80 / 568 lm
L30 0% L19 100% Ra 65 / 262 lm

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.
Available to choose CCT from 1900K to 5000K and Blue

Cross-sectional sizes
when mounted
scale=1:1






Luci Power FLEX Spect C Luci Power FLEX Luci Power FLEX THOF

Lamp fitting list


Indoor

Strip Light

	<div>Top bend</div>  <div>3 years warranty</div>				<div>Side bend</div>  <div>3 years warranty</div>				<div>Side bend</div>  <div>3 years warranty</div>							
Product name	Discontinued Luci Flat FLEX F				Luci Power FLEX α				Luci FLEX α F							
LED pitch	10mm pitch				16mm pitch				20mm pitch				10mm pitch			
Model No.	LFTF10-1000-* -CL-I				LFTF16-1000-* -CL-I				LFPA20-0960-* -CL-I				LFXF10-1000-* -CL-I			
Description page	P.74				P.74				P.82				P.88			
Custom order	○				○				-				○			
Max. customised Length	5m				5m				-				5m			
Diffuser Tube	○				○				-				○			
Input voltage	DC24V				DC24V				DC24V				DC24V			
Power consumption	3.9W/m				2.5W/m				10.4W/m				3.9W/m			
Dimension	1010x9.8x4mm				1010x9.8x4mm				970x13.7x13.4mm				1010x9.8x4mm			
LED beam angle	120°				120°				120°				120°			
Max. length per circuit	5m				5m				5m				5m			
Cuttable unit	62.4mm (6 LED)				100mm (6 LED)				40mm (2 LED)				62.4mm (6 LED)			
Light source color	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent															
D	7100K	Ra 94	*	324lm	Ra 94	*	-	-	*	-	Ra 74	*	331lm*			
N	5300K	Ra 94	*	329lm*	Ra 94	*	-	Ra 90	○	613lm*	-	-	-			
W	4200K	Ra 90	○	294lm	Ra 90	○	-	Ra 90	○	640lm*	Ra 70	○	330lm*			
WW	3500K	Ra 90	○	305lm	Ra 90	○	-	Ra 90	○	613lm*	Ra 75	○	281lm*			
L30	3000K	Ra 90	○	300lm	Ra 90	○	187lm*	Ra 90	○	555lm*	Ra 70	○	302lm			
L27	2700K	Ra 87	○	282lm	Ra 87	○	176lm*	Ra 90	○	540lm*	Ra 71	○	253lm*			
L24	2400K	Ra 83	○	229lm*	Ra 83	○	143lm*	Ra 90	○	440lm*	Ra 65	*	245lm			
L21	2100K	-	-	-	-	-	-	-	-	-	-	-	-			
L19	1900K	-	-	-	-	-	-	Ra 70	*	492lm*	-	-	-			


Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Cross-sectional sizes when mounted
scale=1:1

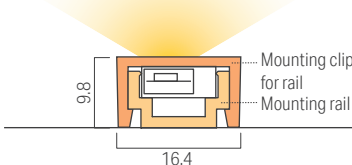


9.8
16.4
Mounting clip for rail
Mounting rail

Luci Flat FLEX F

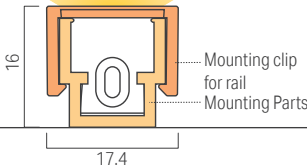

16
17.4
Mounting clip for rail
Mounting Parts


Luci Power FLEX α

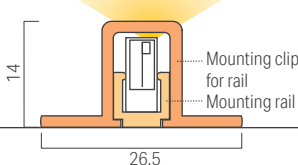

14
26.5
Mounting clip for rail
Mounting rail

Luci FLEX α F

Cross-sectional sizes
when mounted
scale=1:1

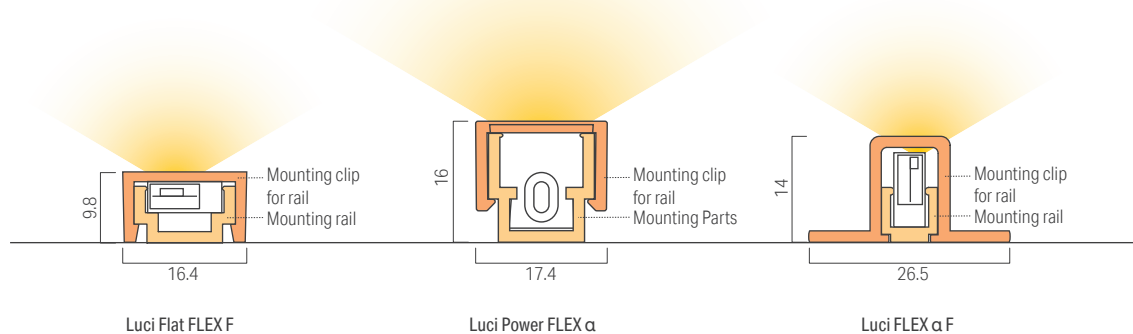


Indoor Rigid Light

				
Product name	Renewal Luci Vivoxy Graze	New Luci Vivoxy Graze THOF	Luci RECTA	Renewal Luci THOF®
Model No. Description page	LVV50-1200- *- SP- I P.96	LVVTH50-1200-NL27- SP- I P.104	LRE-1000- *- DF- I P.112	LTH-1000-NL27- DF- I P.118
Length Variation	4 types 0300, 0600, 0900, 1200	4 types 0300, 0600, 0900, 1200	3 types 0100, 0500, 1000 <small>*Refer to the product page for actual length.</small>	3 types 0100, 0500, 1000 <small>*Refer to the product page for actual length.</small>
Diffuser Cover	—	—	○	○
Input voltage	Constant Current	Constant Current	DC24V	DC24V
Power consumption	38.9W/m @700mA	38.9W/m @700mA	31.2W/m (Max)	31.2W/m (Max)
Cross section	27x24 mm	27x24 mm	24x39 mm	24x39 mm
LED beam angle	15°x32.5°	15°x32.5°	—	—
Max. length per circuit	2.7m @ 700mA (L22 2.4m @ 700mA)	5.7m @ 700mA	3.3m	4m
Cuttable unit	—	—	—	—
Light source color	○ = Device inventory * = Equivalent			
D	7100K	-	-	-
N	5300K (5000K) Ra90 ○ 5032lm	<div> NL27 5000K~2700K ○ Dimming rate N 100% L27 0% Ra90 / 2481lm N 100% L27 100% Ra92 / 4386lm N 0% L27 100% Ra93 / 1985lm </div>	(5000K) Ra92 ○ 2380lm	<div> NL27 5000K~2700K ○ Dimming rate N 100% L27 0% Ra92 / 1213lm N 100% L27 100% Ra95 / 2370lm N 0% L27 100% Ra94 / 1096lm </div>
W	4200K (4000K) Ra92 ○ 4977lm		(4000K) Ra92 ○ 2380lm	
WW	3500K Ra92 ○ 4152lm		Ra93 ○ 2303lm	
L30	3000K Ra92 ○ 4183lm		Ra94 ○ 2226lm	
L27	2700K Ra94 ○ 3912lm		Ra93 ○ 2150lm	
L24	2400K -		Ra93 ○ 1996lm	
L21	2100K (2200K) Ra82 ○ 3208lm		-	
L19	1900K -		-	



Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

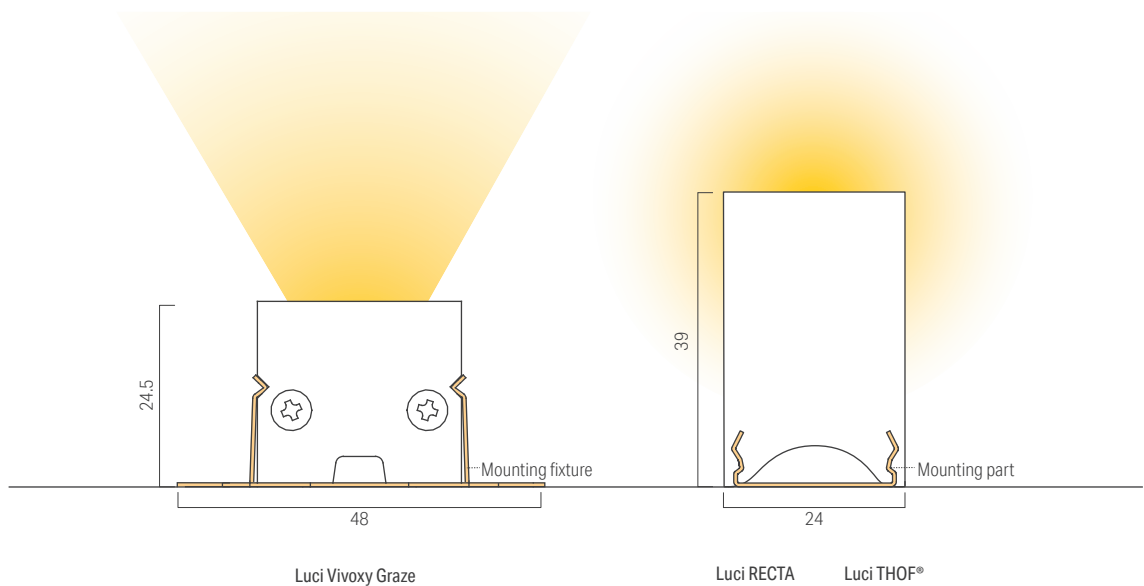Cross-sectional sizes
when mounted
scale=1:1




Lamp fitting list

Indoor Rigid Light

					
Product name	Luci Creide® lens	Luci Creide® F	Luci silux® K (13.1 W/m)	Luci silux® K (8.1 W/m)	Luci silux® K (4.3 W/m)
Model No. Description page	LCEL-1170-* - DF-I P.124	LCEF-1170-* - DF-I P.124	LSXK-1008-* - DF-I-13 P.134	LSXK-1008-* - DF-I-8 P.134	LSXK-1008-* - DF-I-4 P.134
Length Variation	6 types 0150, 0300, 0510, 0880, 1170, 1460 <small>*Refer to the product page for actual length.</small>	6 types 0150, 0300, 0510, 0880, 1170, 1460 <small>*Refer to the product page for actual length.</small>	10 types 0074, 0259, 0388, 0509, 0573, 0702, 0823, 1008, 1137, 1451		
Diffuser Cover	○	○	○	○	○
Input voltage	DC24V	DC24V	DC24V	DC24V	DC24V
Power consumption	20.6W/m	20.6W/m	13.1W/m	8.1W/m	4.3W/m
Cross section	17.4x42.5mm	17.4x42.5mm	12x14mm	12x14mm	12x14mm
LED beam angle	—	—	—	—	—
Max. length per circuit	5m	5m	6m	6m	6m
Cuttable unit	—	—	—	—	—
Light source color	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent				
D	7100K	-	-	-	-
N	5300K	-	(5000K) Ra93 ○ 620lm	(5000K) Ra93 ○ 450lm	(5000K) Ra93 ○ 213lm
W	4200K	(4000K) Ra92 ○ 1527lm	(4000K) Ra94 ○ 620lm	(4000K) Ra94 ○ 450lm	(4000K) Ra94 ○ 213lm
WW	3500K	Ra93 ○ 1477lm	Ra94 ○ 594lm	Ra94 ○ 431lm	Ra94 ○ 204lm
L30	3000K	Ra94 ○ 1428lm	Ra93 ○ 581lm	Ra93 ○ 421lm	Ra93 ○ 199lm
L27	2700K	Ra93 ○ 1379lm	Ra93 ○ 554lm	Ra93 ○ 402lm	Ra93 ○ 190lm
L24	2400K	Ra93 ○ 1280lm	Ra94 ○ 515lm	Ra94 ○ 373lm	Ra94 ○ 177lm
L21	2100K	-	Ra90 ○ 515lm	Ra90 ○ 351lm	Ra90 ○ 166lm
L19	1900K	-	-	-	-



Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

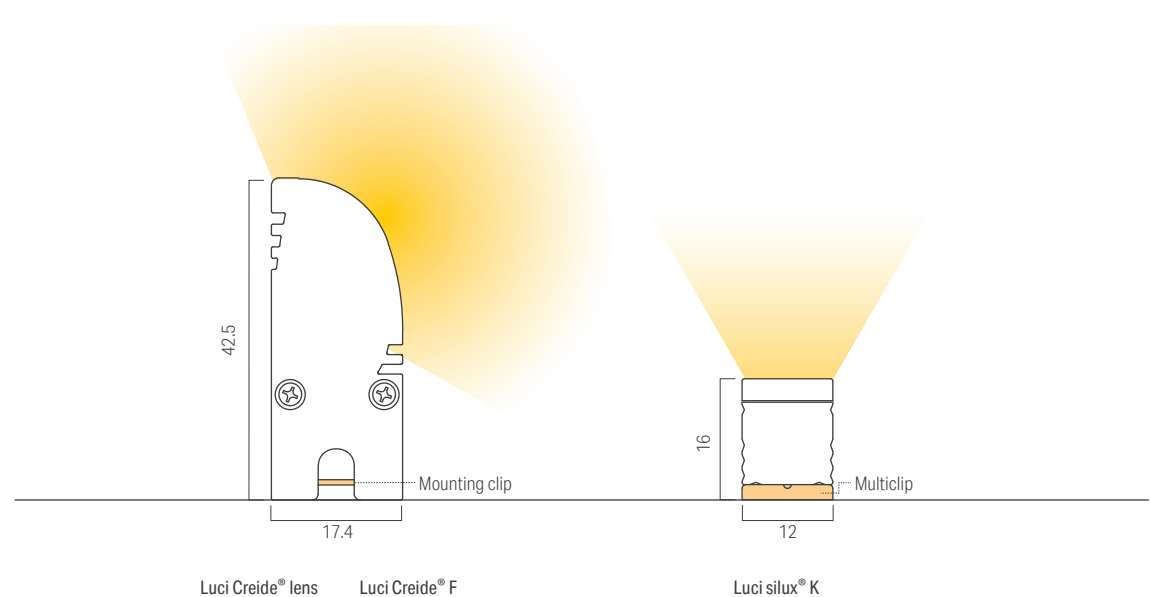Cross-sectional sizes
when mounted
scale=1:1




Luci Creide® lens Luci Creide® F Luci silux® K

Indoor
Rigid Light


		 <div>3 years warranty</div>			 <div>3 years warranty</div>
Product name		Luci silux® wide K (13.1 W/m)	Luci silux® wide K (8.1 W/m)	Luci silux® wide K (4.3 W/m)	Luci nano line
Model No. Description page		LSXWK-1008-* -DF-I-13 P.144	LSXWK-1008-* -DF-I-8 P.144	LSXWK-1008-* -DF-I-4 P.144	LNL-0984-* -DF-I P.154
Length Variation		10 types 0074, 0259, 0388, 0509, 0573, 0702, 0823, 1008, 1137, 1451			10 types 0109, 0206, 0303, 0400, 0498, 0595, 0692, 0789, 0886, 0984
Diffuser Cover		○	○	○	○
Input voltage		DC24V	DC24V	DC24V	DC24V
Power consumption		13.1W/m	8.1W/m	4.3W/m	7.2W/m
Cross section		12x18mm	12x18mm	12x18mm	5.5x18.8mm
LED beam angle		—	—	—	—
Max. length per circuit		6m	6m	6m	5m
Cuttable unit		—	—	—	—
Light source color		○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent			
D	7100K	-	-	-	-
N	5300K	(5000K) Ra93 ○ 811lm	(5000K) Ra93 ○ 589lm	(5000K) Ra93 ○ 279lm	- ○ -
W	4200K	(4000K) Ra94 ○ 811lm	(4000K) Ra94 ○ 589lm	(4000K) Ra94 ○ 279lm	Ra92 ○ 66lm
WW	3500K	Ra94 ○ 777lm	Ra94 ○ 564lm	Ra94 ○ 267lm	Ra91 ○ 58lm
L30	3000K	Ra93 ○ 759lm	Ra93 ○ 551lm	Ra93 ○ 261lm	Ra87 ○ 65lm
L27	2700K	Ra93 ○ 725lm	Ra93 ○ 526lm	Ra93 ○ 249lm	Ra87 ○ 59lm
L24	2400K	Ra94 ○ 673lm	Ra94 ○ 488lm	Ra94 ○ 231lm	Ra85 ○ 52lm
L21	2100K	Ra90 ○ -	Ra90 ○ 426lm	Ra90 ○ 201lm	-
L19	1900K	-	-	-	-

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Cross-sectional sizes when mounted
scale=1:1

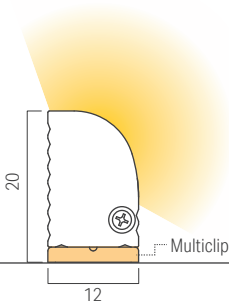


Luci silux® wide K

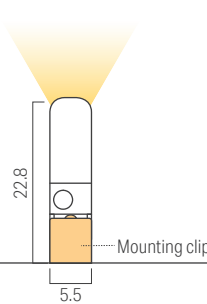

Luci nano line

Lamp fitting list

Outdoor Strip Light

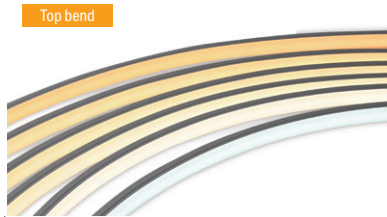

Product name	Renewal Luci UQ FLEX IP67 (15.8W/m)	Renewal Luci UQ FLEX IP67 (12.6W/m)	Renewal Luci UQ FLEX IP67 (8.4W/m)
LED pitch	-	-	-
Model No. Description page	LFU-T * * * * -DF-O-15 P.176	LFU-T * * * * -DF-O-12 P.176	LFU-T * * * * -DF-O-8 P.176
Custom order	○	○	○
Max. customised Length	2m	2m	2m
Diffuser Tube	○	○	○
Input voltage	DC24V	DC24V	DC24V
Power consumption	15.8 W/m	12.6 W/m	8.4 W/m
Dimension	(Length)x16x15mm	(Length)x16x15mm	(Length)x16x15mm
LED beam angle	—	—	—
Max. length per circuit	10m	10m	10m
Cuttable unit	Not available to cut		
Delivered CCT	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent		
D	6000K Ra92	* 937lm	* 498lm
N	-	* -	* -
W	4000K Ra93	○ 966lm	○ 513lm
WW	3200K Ra93	○ 865lm	○ 460lm
L30	2700K Ra94	○ 803lm	○ 427lm
L27	2500K Ra93	○ 781lm	○ 415lm
L24	2300K Ra93	○ 730lm	○ 388lm
L21	-	* -	* -
L19	-	* -	* -

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Caution


Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Prohibited installation places

- pooling of water
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Cross-sectional sizes
when mounted
scale=1:1

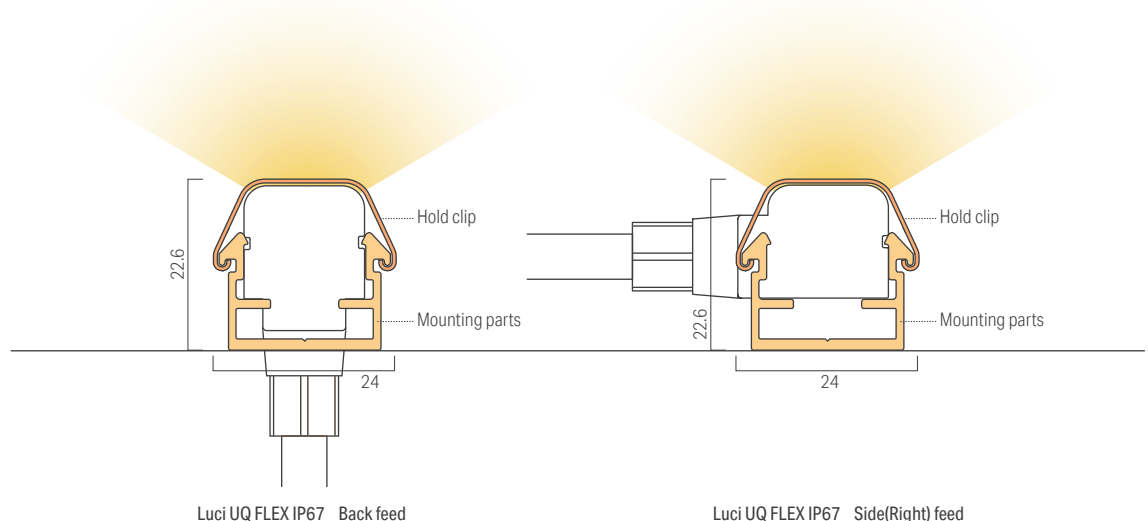

Luci UQ FLEX IP67 _ Back feed

Luci UQ FLEX IP67 _ Side(Right) feed

Outdoor
Strip Light

Product name	New Luci UQ FLEX α IP67 (15.8W/m)	New Luci UQ FLEX α IP67 (12.6W/m)	New Luci UQ FLEX IP67 (8.4W/m)
LED pitch	-	-	-
Model No. Description page	LFUA-T * * * *-DF-0-15 P.178	LFUA-T * * * *-DF-0-12 P.178	LFUA-T * * * *-DF-0-8 P.178
Custom order	○	○	○
Max. customised Length	2m	2m	2m
Diffuser Tube	○	○	○
Input voltage	DC24V	DC24V	DC24V
Power consumption	15.8 W/m	12.6 W/m	8.4 W/m
Dimension	(Length)x16x15mm	(Length)x16x15mm	(Length)x16x15mm
LED beam angle	—	—	—
Max. length per circuit	10m	10m	10m
Cuttable unit	Not available to cut		
Delivered CCT	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent		
D 6000K Ra92	* 656lm	* 523lm	* 349lm
N - -	* -	* -	* -
W 4000K Ra93	○ 666lm	○ 531lm	○ 354lm
WW 3200K Ra93	○ 603lm	○ 481lm	○ 320lm
L30 2700K Ra94	○ 592lm	○ 472lm	○ 315lm
L27 2500K Ra93	○ 547lm	○ 436lm	○ 291lm
L24 2300K Ra93	○ 514lm	○ 410lm	○ 273lm
L21 - -	* -	* -	* -
L19 - -	* -	* -	* -


Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Caution


Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Prohibited installation places

- pooling of water
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Cross-sectional sizes
when mounted
scale=1:1

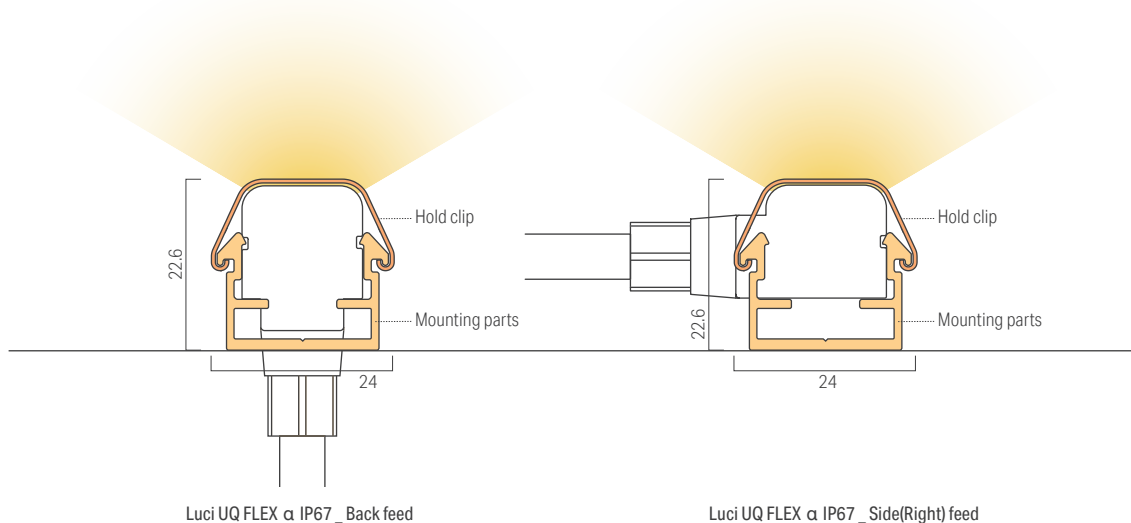

Luci UQ FLEX α IP67 _ Back feed

Luci UQ FLEX α IP67 _ Side(Right) feed

Lamp fitting list

Outdoor Strip Light

	<div>Top/Side bend</div> 		<div>Top bend</div> 	
Product name	<div>New</div> Luci Vivoxy FLEX IP67 (24 W/m)	<div>New</div> Luci Vivoxy FLEX IP67 (16 W/m)	<div>New</div> Luci UQ FLEX Sauna	
LED pitch	-	-	-	
Model No.	LVF40-1000 * - * - * -O-24- *	LVF40-1000 * - * - * -O-16- *	LFUS-T * * * - * -DF-O	
Description page	P.162	P.162	P.170	
Custom order	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Max. customised Length	2m	2m		
Diffuser Tube	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Input voltage	DC24V	DC24V	DC24V	
Power consumption	24 W/m	16 W/m	5.1 W/m	
Dimension	*x27x33mm	*x27x33mm	*x16x15mm	
LED beam angle	22°×35°, 35°, 50°	22°×35°, 35°, 50°	—	
Max. length per circuit	5m	5m	5m	
Cuttable unit	Not available to cut			
Light source color	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent			
D	6500K	<div>Ra 85</div> <input type="radio"/> 1844 lm	<div>Ra 85</div> <input type="radio"/> 1230 lm	-
N	5000K	<div>Ra 84</div> <input type="radio"/> 1970 lm	<div>Ra 84</div> <input type="radio"/> 1314 lm	-
W	4000K	<div>Ra 94</div> <input type="radio"/> 1587 lm	<div>Ra 94</div> <input type="radio"/> 1059 lm	-
WW	3500K	<div>Ra 82</div> <input type="radio"/> 1880 lm	<div>Ra 82</div> <input type="radio"/> 1253 lm	-
L30	3000K	<div>Ra 92</div> <input type="radio"/> 1614 lm	<div>Ra 92</div> <input type="radio"/> 1076 lm	-
L27	2700K	<div>Ra 93</div> <input type="radio"/> 1605 lm	<div>Ra 93</div> <input type="radio"/> 1071 lm	<div>Ra 83</div> <input type="radio"/> 234 lm*
L24	2400K	-	-	-
L21	2100K	(L22 2200K) <div>Ra 81</div> <input type="radio"/> 1563 lm	(L22 2200K) <div>Ra 81</div> <input type="radio"/> 1042 lm	-
L19	1900K	-	-	-


Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Caution

Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Prohibited installation places

- pooling of water
- liquids including chlorine or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray




Prohibited installation places

- pooling water
- liquids including chlorine or chemicals
- coastal areas which are affected by sea spray
- where sulfide gas is contained in the air such as hot spring



Cross-sectional sizes
when mounted
scale=1:1

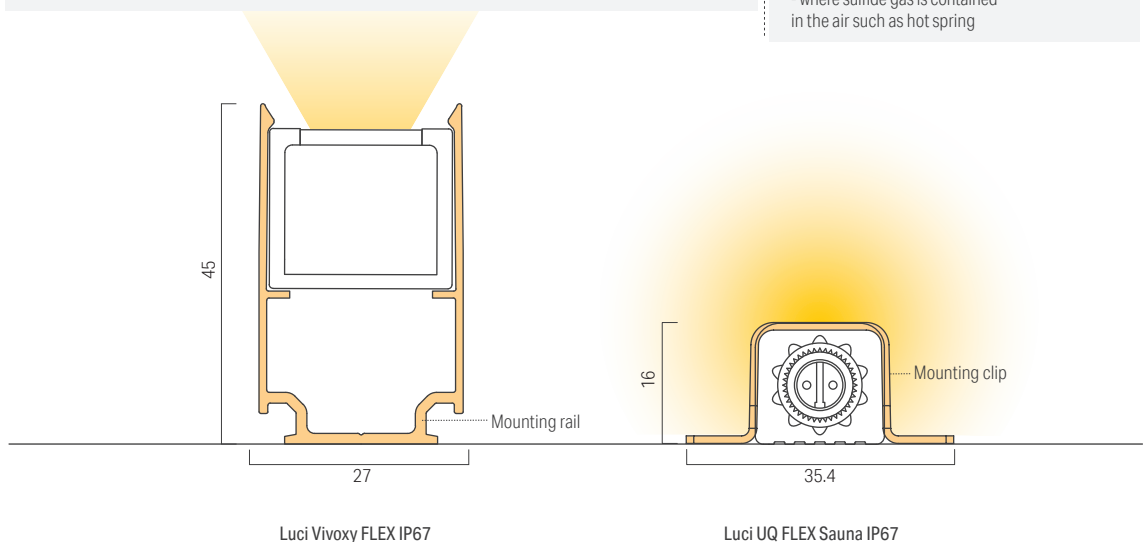

Luci Vivoxy FLEX IP67

Luci UQ FLEX Sauna IP67

Outdoor
Strip Light

Top bend

3 years
warranty

Product name

Discontinued Luci Power FLEX EX IP65

LED pitch	15mm pitch	20mm pitch	30mm pitch (9.5W)	30mm pitch (6.5W)	30mm pitch (4.5W)
Model No. Description page	LFPEX15-1000-* -CL-O P.190	LFPEX20-1000-* -CL-O P.190	LFPEX30-1000-* -CL-O-9 P.190	LFPEX30-1000-* -CL-O-6 P.190	LFPEX30-1000-* -CL-O-4 P.190
Custom order	○	○	○	○	○
Max. customised Length	3.5m	5m	5m	5m	5m
Diffuser Tube	N/A	N/A	N/A	N/A	N/A
Input voltage	DC24V	DC24V	DC24V	DC24V	DC24V
Power consumption	18.2W/m	12.1W/m	9.5W/m	6.5W/m	4.5W/m
Dimension	1011x15x4.5mm	1011x15x4.5mm	1011x15x4.5mm	1011x15x4.5mm	1011x15x4.5mm
LED beam angle	120°	120°	120°	120°	120°
Max. length per circuit	3.5m	5m	5m	5m	5m
Cutable unit	Not available to cut				
Light source color	○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent				
D 6500K	-	-	-	-	-
N 5300K Ra92	* 1692lm	* 1150lm	* 847lm	* 536lm	* 405lm
W 4200K Ra93	○ 1680lm	○ 1125lm	○ 812lm*	○ 556lm*	○ 388lm*
WW 3500K Ra93	○ 1620lm	○ 1101lm	○ 704lm*	○ 564lm*	○ 337lm*
L30 3000K Ra94	○ 1493lm	○ 1008lm	○ 644lm*	○ 522lm*	○ 308lm*
L27 2700K Ra93	○ 1496lm	○ 1016lm	○ 643lm*	○ 516lm*	○ 307lm*
L24 2400K Ra93	○ 1260lm	○ 856lm	○ 592lm*	○ 494lm*	○ 283lm*
L21 2100K Ra93	* 1100lm	* 748lm	* 550lm	* 348lm	* 263lm
L19 1900K Ra63	* 1405lm	* 955lm	* 703lm	* 445lm	* 336lm

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Caution


Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Prohibited installation places

- Direct exposed to water / pooling of water
- Direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Cross-sectional sizes
when mounted
scale=1:1



Luci Power FLEX EX IP65

Lamp fitting list

Outdoor Strip Light



Product name	Discontinued Luci Power FLEX IP65		Discontinued Luci Flat FLEX F IP65		Luci FLEX α F IP65
LED pitch	15mm pitch	20mm pitch	10mm pitch	16mm pitch	10mm pitch
Model No. Description page	LFP15-0900- * -CL-O P.196	LFP20-1000- * -CL-O P.196	LFTF10-1000- * -CL-O P.202	LFTF16-1000- * -CL-O P.202	LFXF10-1000- * -CL-O P.208
Custom order	○	○	○	○	○
Max. customised Length	4.5m	5m	5m	5m	5m
Diffuser Tube	○	○	○	○	○
Input voltage	DC24V	DC24V	DC24V	DC24V	DC24V
Power consumption	15.4W/m	10.5W/m	3.9W/m	2.5W/m	3.9W/m
Dimension	911x15x4.5mm	1011x15x4.5mm	1010x9.8x4mm	1010x9.8x4mm	1010x9.8x4mm
LED beam angle	120°	120°	120°	120°	120°
Max. length per circuit	4.5m	5m	5m	5m	5m
Cutttable unit	Not available to cut				

Light source color		○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent														
D	7100K	Ra90	*	875lm	Ra90	*	698lm	Ra94	*	324lm	Ra94	*	-	Ra74	*	331lm*
N	5300K	Ra90	*	875lm	Ra90	*	639lm	Ra94	○	329lm*	Ra94	○	-	-	-	-
W	4200K	Ra90	○	818lm	Ra90	○	667lm	Ra90	○	294lm	Ra90	○	-	Ra70	○	330lm*
WW	3500K	Ra90	○	774lm	Ra90	○	639lm	Ra90	○	305lm	Ra90	○	-	Ra75	○	281lm*
L30	3000K	Ra90	○	710lm	Ra90	○	579lm	Ra90	○	300lm	Ra90	○	187lm*	Ra70	○	302lm
L27	2700K	Ra90	○	711lm	Ra90	○	563lm	Ra87	○	282lm	Ra87	○	176lm*	Ra71	○	253lm*
L24	2400K	Ra90	○	608lm	Ra90	○	459lm	Ra83	○	229lm*	Ra83	○	143lm*	Ra65	*	245lm
L21	2100K	-	-	-	-	*	-	-	-	-	-	-	-	-	-	-
L19	1900K	-	*	-	-	*	-	-	-	-	-	-	-	-	-	-
B	Blue	-	*	-	-	*	-	-	-	-	-	-	-	-	-	-


Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Caution


Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Prohibited installation places

- direct expose to water / pooling of water
- direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Cross-sectional sizes
when mounted
scale=1:1

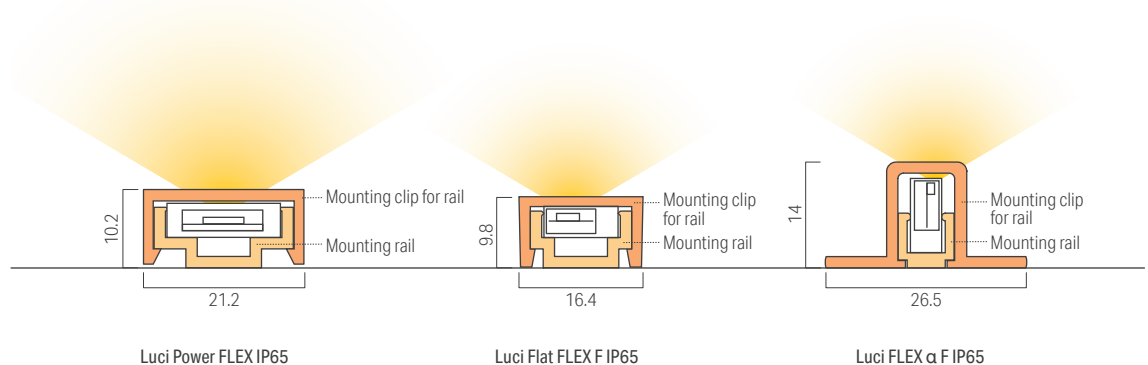

Luci Power FLEX IP65

Luci Flat FLEX F IP65

Luci FLEX α F IP65

Outdoor
Rigid Light

Product name	Luci EFRO IP65	Discontinued Power LEDs Line IP65	Discontinued LEDs Bar IP65	Discontinued LEDs Line IP67
Model No. Description page	LRO-1142- * -DF-IW P.214	L-ELA9K2-096 * * * -24C-P P.222	L-ELS7K1-098 * * * -24 P.228	L-ELR9K2-098 * * * -M-24 P.234
Length Variation	5 types 0162, 0302, 0582, 0862, 1142	12 types 012, 024, 036, 048, 060, 072, 084, 096, 108, 120, 132, 144 *Refer to the product page for actual length.	12 types 014, 026, 038, 050, 062, 074, 086, 098, 110, 122, 134, 146 *Refer to the product page for actual length.	12 types 014, 026, 038, 050, 062, 074, 086, 098, 110, 122, 134, 146 *Refer to the product page for actual length.
Diffuser Cover	○	N/A	○	○
Input voltage	DC24V	DC24V	DC24V	DC24V
Power consumption	8.4W/m	19.2 W/965mm	7.7 W/983mm	7.7 W/980mm
Cross section	24.6x28.3mm	35x22mm	13.2x13.6mm	14.6x13.8mm
LED beam angle	—	—	—	—
Max. length per circuit	4.5 m	9m	9m	9m
Cuttable unit	—	—	—	—
Light source color	○ = Device inventory * = Equivalent			
D	7100K	-	-	-
N	5300K	-	-	-
W	4200K (4000K) Ra94 ○ 802lm	(4000K) Ra83 ○ 1820lm	(4000K) Ra82 ○ 850lm	(4000K) Ra83 ○ 960lm
WW	3500K Ra94 ○ 862lm	Ra83 ○ 1820lm	Ra82 ○ 810lm	Ra83 ○ 960lm
L30	3000K Ra93 ○ 688lm	Ra83 ○ 1820lm	Ra82 ○ 790lm	Ra83 ○ 960lm
L27	2700K Ra93 ○ 697lm	Ra83 ○ 1760lm	Ra82 ○ 780lm	Ra83 ○ 930lm
L24	2400K Ra94 ○ 662lm	-	-	-
L21	2100K -	-	-	-
L19	1900K -	-	-	-

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed.
Please use as reference materials for your planning.

Caution

Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Prohibited installation places


- direct expose to water / pooling of water
- direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray

**Prohibited installation places**

- direct expose to water / pooling of water
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Cross-sectional sizes
when mounted
scale=1:1

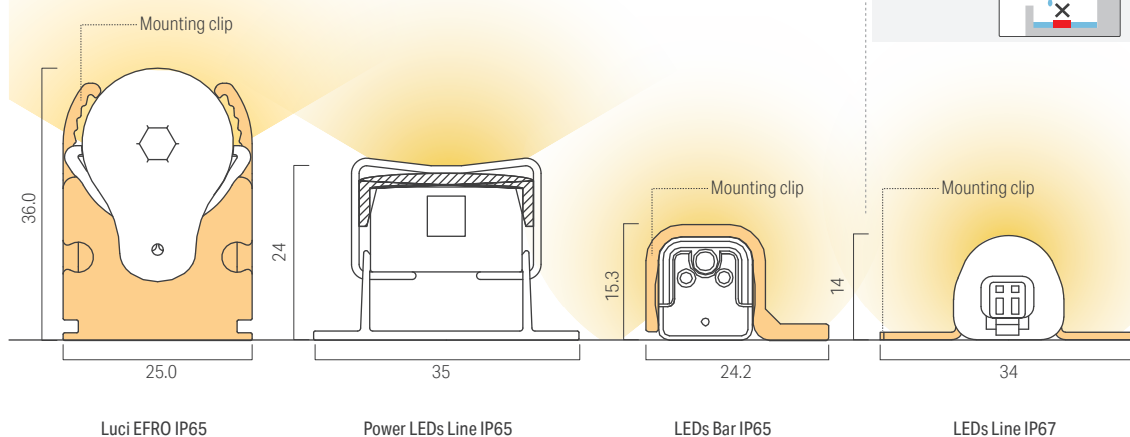

Luci EFRO IP65

Power LEDs Line IP65

LEDs Bar IP65

LEDs Line IP67

Product size & Brightness

Indoor

Strip Light

All of these data belong to L27.

Top bend

Luci UQ FLEX Indoor P.32 New

774 lm/m

Ra 94

15.8 w/m

D^{*}

N^{*}

W

WW



L30

L27

L24

L21^{*}

L19^{*}

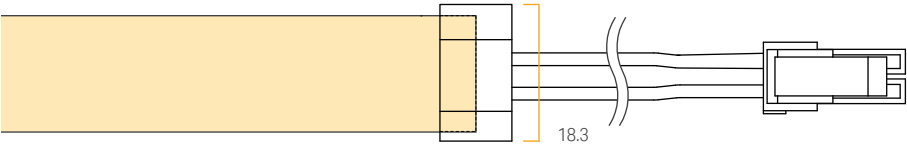

Luci Power FLEX EX 15mm pitch Indoor P.46 Discontinued

1496 lm/m

Ra 93

18.2 w/m

N^{*}

W

WW

L30

L27

L24

L21^{*}

L19^{*}

Luci Power FLEX Spect C 20mm pitch Indoor P.56 Discontinued



- lm/m

Ra 97

14.2 w/m

D^{*}

N^{*}

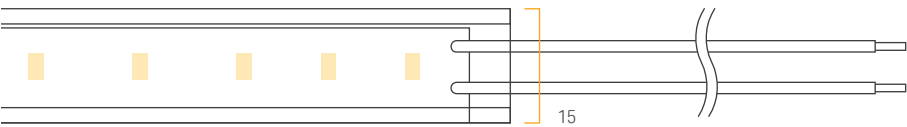

Luci Power FLEX 15mm pitch Indoor P.60 Discontinued

790 lm/m

Ra 90

15.4 w/m

D^{*}

N^{*}

W

WW

L30

L27

L24

L19^{*}

B^{*}

Luci Power FLEX THOF Indoor P.68 Renewal

326 lm/m

Ra 86



11 w/m

NL27

L30L19

Choice of N-L19 Blue

(NL27 N:0% L27:100%)

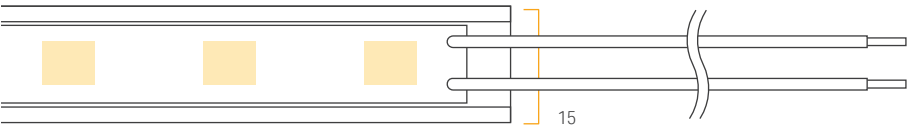

Luci Flat FLEX F 10mm pitch Indoor P.74 Discontinued

282 lm/m

Ra 87

3.9 w/m

D^{*}

N^{*}



W

WW

L30

L27


L24



Indoor **Strip Light**

All of these data belong to L27.

Side bend



**Luci UQ FLEX α** P.32 **New**

573 lm/m

Ra 90

15.8 w/m

D*	N*	W	WW	L30	L27	L24	L21*	L19*
----	----	---	----	-----	-----	-----	------	------


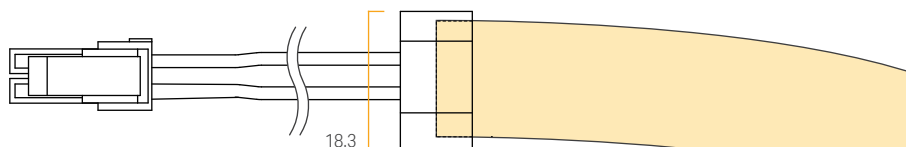
**Luci Power FLEX α 20mm pitch Indoor** P.82

540 lm/m

Ra 90

10.4 w/m

D*	N	W	WW	L30	L27	L24	L19*
----	---	---	----	-----	-----	-----	------

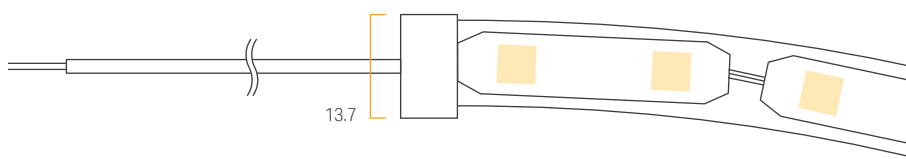**Luci FLEX α F 10mm pitch Indoor** P.88

252 lm/m

Ra 71

3.9 w/m

D*	W	WW*	L30	L27	L24*
----	---	-----	-----	-----	------



Product size & Brightness

Indoor

Rigid Light

All of these data belong to L27.

Luci Vivoxy Graze Indoor

P.96

Renewal

3268 lm/m
(700mA)

Ra 94

38.9 w/m

N



W

WW

L30

L27

L22

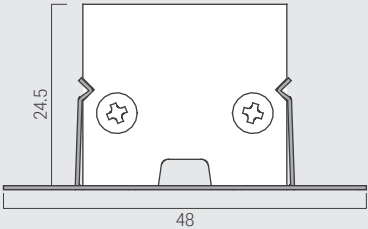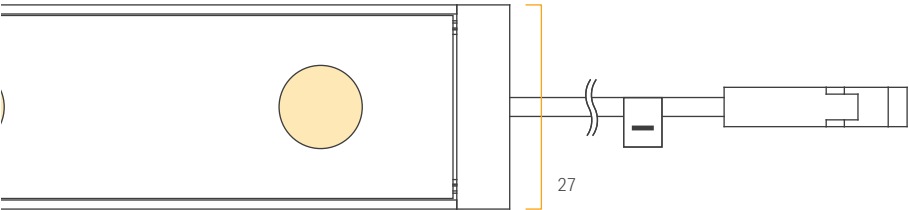

Luci Vivoxy Graze THOF® Indoor

P.104

New



3655 lm/m
(700mA N 100%, L27 100%)

Ra 92

38.9 w/m

NL27

Choice N ⇌ L27

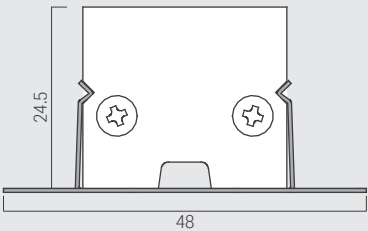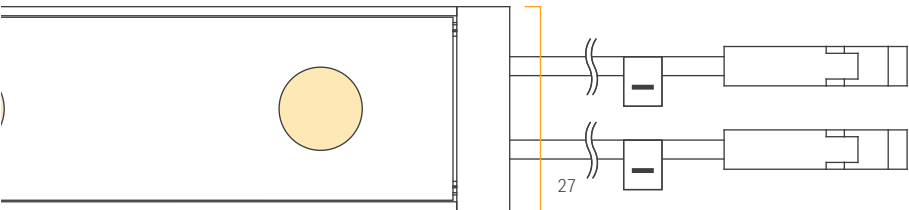

Luci RECTA

P.112

2150 lm/m

Ra 93

31.2 w/m

N



W

WW

L30

L27

L24

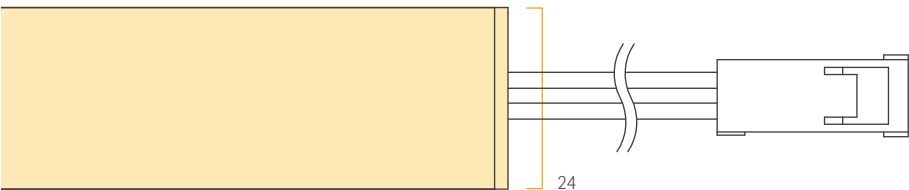

Luci THOF®

P.118

Renewal



1096 lm/m
(NL27 N:0% L27:100%)

Ra 94

31.2 w/m
(Max)

NL27

Choice N - L24

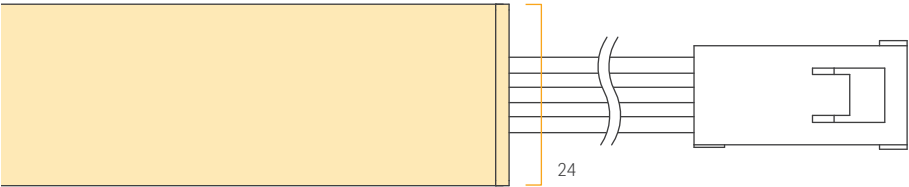

Indoor

Rigid Light

All of these data belong to L27.

Lamp fitting list

Product size & Brightness

Application

Project reference

Model No. INDEX

Luci Creide® lens P.124

1178lm/m

Ra 93

20.6 w/m

W

WW

L30

L27

L24

Luci Creide® F P.124

1195 lm/m

Ra 93

20.6 w/m



W

WW

L30

L27

L24

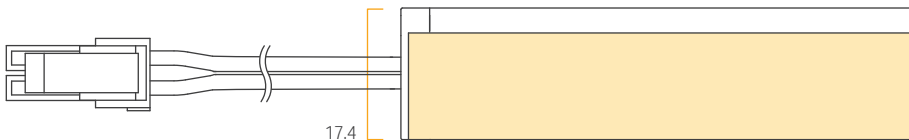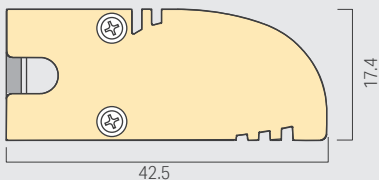

Luci silux® K P.134

549 lm/m

Ra 93

13.1 w/m

N

W



WW

L30

L27

L24

L21



Luci silux® wide K P.144

719 lm/m

Ra 93

13.1 w/m

N

W


WW

L30

L27

L24

L21



Luci nano line P.154

59 lm/m

Ra 87

7.2 w/m

N


W

WW

L30

L27

L24



Product size & Brightness

Outdoor



Strip Light

All of these data belong to L27.

Top bend



Luci UQ FLEX Sauna IP67 P.170 New

- 234 lm/m
- Ra 83
- 5.1 w/m
- L27

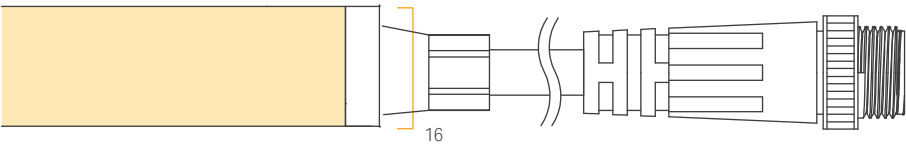


Luci UQ FLEX IP67 P.176 Renewal

- 803 lm/m
- Ra 94
- 15.8 w/m
- D
- N
- W
- WW
- L30
- L27
- L24
- L21
- L19

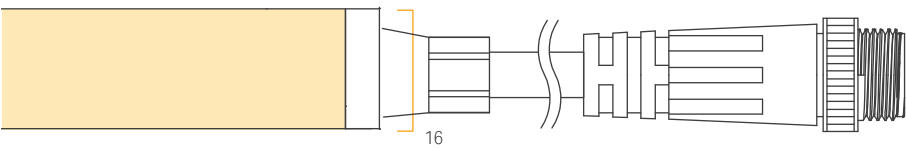

All of these data belong to L27.



Top bend



Luci Power FLEX EX 15mm pitch IP65 P.190

Discontinued



1496 lm/m Ra 93 18.2 w/m N* W WW L30 L27 L24 L21* L19*

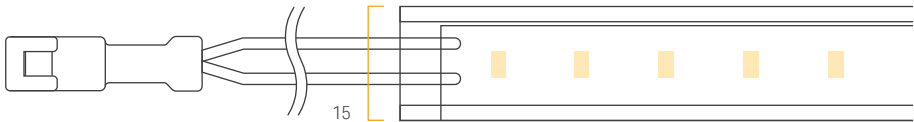

Luci Power FLEX 15mm pitch IP65 P.196

Discontinued


790 lm/m Ra 90 15.4 w/m D* N* W WW L30 L27 L24 L19* B*

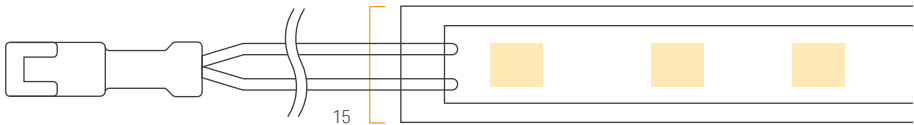

Luci Flat FLEX F 10mm pitch IP65 P.202

Discontinued

282 lm/m Ra 87 3.9 w/m D* N* W WW L30 L27 L24



Product size & Brightness

Outdoor



Strip Light

All of these data belong to L27.

Side bend



Luci Vivoxy FLEX IP67 P.162 New

- 1605 lm/m
- Ra 93
- 66.9 w/m
- D
- N
- W
- WW
- L30
- L27
- L24
- L22

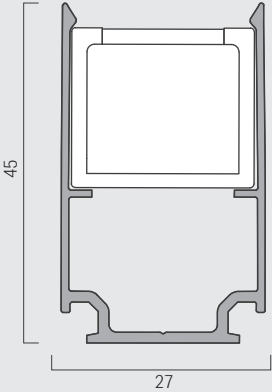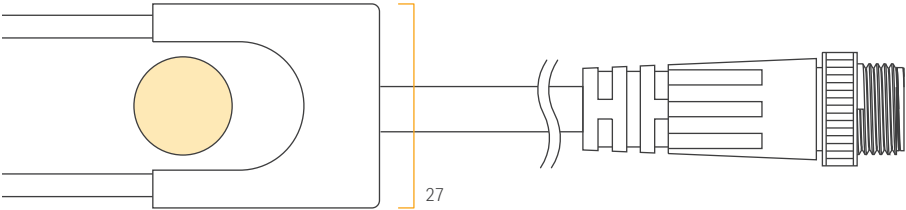



Luci UQ FLEX α IP67 P.176 New

- 592 lm/m
- Ra 90
- 15.8 w/m
- D
- N
- W
- WW
- L30
- L27
- L24
- L21
- L19

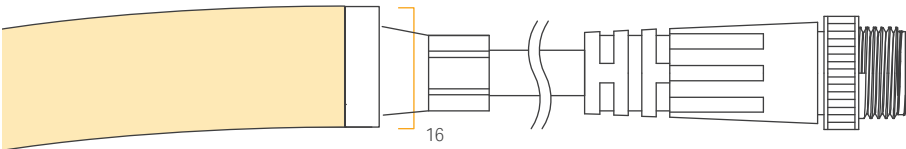


Luci FLEX α F 10mm pitch IP65 P.208

- 252 lm/m
- Ra 71
- 3.9 w/m
- D
- W
- WW
- L30
- L27
- L24



All of these data belong to L27.



Luci EFRO IP65 P.214

606 lm/m

Ra 93

8.4 w/m



W

WW

L30

L27

L24

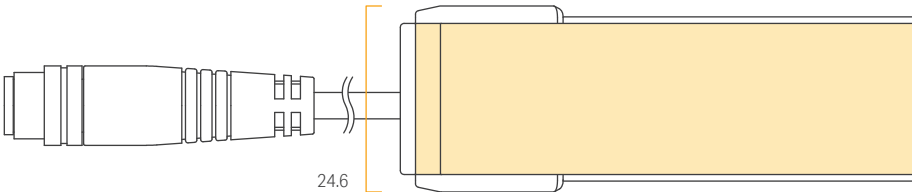

Power LEDs Line IP65 P.222 Discontinued

1575 lm/m

Ra 83



19.8 w/m

W

WW

L30

L27

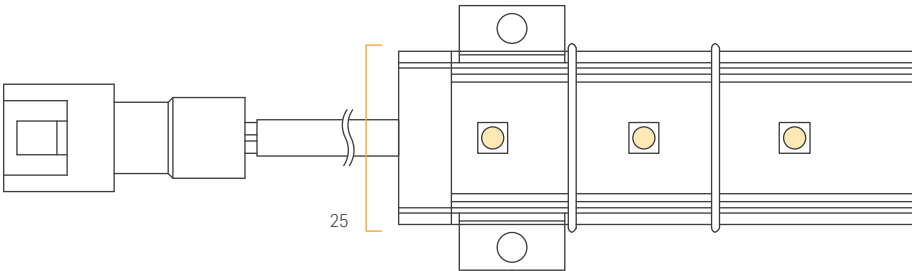

LEDs Bar IP65 P.228 Discontinued

780 lm/m

Ra 82



7.8 w/m

W

WW

L30

L27



LEDs Line IP67 P.234 Discontinued

930 lm/m

Ra 83


7.8 w/m

W

WW

L30

L27

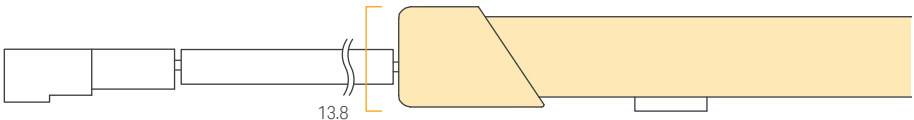

Application

The stated luminous flux values are at 2700 K and 1 m.



A Direct view for facade, indirect light for high rise building

Directly expose light with the straight or curved installation. The random layout can make a futuristic design and install along the shape of the building can emphasise the shape of the building. It is necessary to consider the weather resistance and UV resistance of the LED fixture. IP67 products are suggested to use.

- **Luci UQ FLEX IP67** 15.8W 781lm | 12.6W 623lm | 8.4W 415lm P.176
Dot-free flexible linear light with min. bending R150mm. Highly customizable which is up to 2m. Original silicone material with high weather resistance is used, and it is less deteriorated by UV.
Newly available side bend in addition to top bend.



C Grazing light for facade (upward / downward)

Illuminate the outdoor wall surface upwards or downwards to make eye-catching facade. To get gradual stretch of the light, using fixture with narrow beam angle is recommended. It is necessary to consider to making water drains to avoid LED fixtures submerged.

- **Luci Vivoxo FLEX IP67** 24W 1605lm | 16W 1071lm P.162
With 22°35° spread lens, beautiful graze lighting. Suitable for curved facade or organic shape buildings as it is bendable. For high foot traffic area, glare cut shield is also available.



- **Power LEDs line IP65 (for downward)** 19.2W 1570lm P.222
Since it has compact cross-section, it is ideal for the facade wall of a roadside shop where installation space is small. Because of the extrusion lens, unexpected scalloped pattern hardly comes out even if the distance from the wall is short.



B Under canopy, indirect light for low rise building

Appropriate brightness as well as warm glow without dot to welcome customers. For indirect lighting of glass surfaces and shiny wall materials, dot-free LED fixtures are recommended. IP65 lighting fixture can be used on areas where there are no pooling of water and no direct sunlight.

- **Luci EFRO IP65** 8.4W 610lm P.214
Ideal for large installation space. Can bring the indirect lighting of soft and smooth effect by the circular cross-section lighting.



- **LEDs Bar IP65** 7.7 W | 780lm P.228
Ideal for small installation space. Light spreads beautifully with three sided light emission.



- **Luci Vivoxo FLEX IP67** 24W 1605lm | 16W 1071lm P.162
With the choice of 35, 50 lens, this is suitable for canopy and entrance lighting. wattage up to 24W/m powerful enough to accentuate main entrances. Available with glare cut shield or glare cut silicone



D Light box

Surface Light from diffused glass or stretching sheet needs to have appropriate distance of the depth and place lighting at an equal pitch, which creates less unevenness flat light.

- **Luci Power FLEX EX series IP65** P.190
18.2W 1450lm | 12.1W 1020lm | 9.5W 700lm | 6.5W 520lm | 4.5W 370lm

High efficient, MacAdam 3steps, suitable for lightsource of surface lighting. Various brightness, power consumption and LED pitching provide wide selection depending on installation area. For making uniform light surface, at least 100mm depth is required.



- **Luci Flat FLEX F series IP65** 3.9W 280lm | 2.5W 180lm P.202
When making the line of a recessed light, the minimum depth may be required. Flat FLEX has 10mm pitch and 16mm pitch of LED package gap so that can make the box at least 30mm depth.





E Handrail, steps and stairs

Light installed inside a handrail to illuminate walkway and baluster. Side bend flexible light is suitable for a curved area. Stairs require various lengths and mounting parts to prevent fixtures from falling.

- **Luci FLEX α F IP65** 3.9W 250lm P.208
Only 14 x 18.5mm dimension size including mounting rail and clip is ideal for under the edge of steps. Custom length is available every 62.4mm up to 5m.



F Under bench

Enhance the texture of the reflected tile and stones for night landscape.

- **Luci EFRO IP65** 8.4W 610lm P.214
700lm/m which is appropriate brightness for landscape. High CRI is good for real color of tile and stone material.
- **Luci Flat FLEX F series IP65** 3.9W 280lm | 2.5W 180lm P.202
2.5W/m or 3.9W/m could be chosen which is ideal for landscape lighting where is not necessary for high brightness..
- **Luci UQ FLEX α IP67** 15.8W 547lm | 12.6W 436lm | 8.4W 291lm P.176
Side bend dot-free flexible linear light with min. bending R150mm. Up to 10m per run, ideal for restricted driver installation locations.



G Sauna Lighting

Lighting for saunas must withstand high temperatures and humidity and require less frequent maintenance.

- **Luci UQ FLEX Sauna** 5.1W 234lm P.170
Withstand up to 100°C and 95% humidity, suitable for traditional, infrared and steam sauna. Customizable in length from 250mm to 5M. Available color is only 2700K.



H Bathroom cove, cornice, grazing light

Steam-proof is required for everyday bathroom use. The cove and grazing lighting are suitable for bathroom enhancing relaxing effect. Downward installation with a narrow beam angle highlights the texture of wall-surface and get the feeling of brightness without downlight.

- **Luci EFRO IP65** 8.4W 610lm P.214
Steam proof by both-end gasket and integrated fuse guarantee safety. Bright enough for bathroom indirect lighting.



- **Power LEDs line IP65** 15.4W 1570lm P.222
Powerful 1500lm light and choice of extrusion lens provide ideal grazing light for bathroom.



I Mirror light, vanity light

When doing make-up in front of a mirror, lighting from an appropriate position is required. It is recommended to light both sides of the mirror, as the downlight alone will cast shadows on the face. It is good to light up the whole space by shining light from under the mirror or under the counter.

- **Luci EFRO IP65** 8.4W 610lm P.214
No glare with fully diffused fixture, using High CRI LED which is over 90. Refined design with aluminium rail which can conceal the cables.
- **Luci UQ FLEX IP67** 15.8W 781lm | 12.6W 623lm | 8.4W 415lm P.176
For curve mirror light or indirect light on reflected surface, fully dot less and bendable UQ FLEX is recommended. The wattage can be chosen from 15W/m, 12W/m or 8W/m.





A Wall grazing, curtain box

Lighting walls evenly to make space brighter and brings out wall texture.

- **Luci Vivoxo Graze Indoor** 39W 3268lm | 28W 2447lm | 19W 1759 lm P.96
Ideal for a pattern panel wall and high ceiling wall. Beam angle of 15° x 32° enhances the texture of the wall surface. By using an adjustable clip, you can adjust the angle to which the maximized spreading of light.

- **Luci Creide lens** 20.6W 1180lm P.124
There is an extrusion lens in the diffuse cover, it will not be glaring even if you see it directly. Since the thickness of the fixture is 17.4mm, it is suitable for places with small installation dimensions such as curtain boxes.

B Cove / cornice light

To show the higher ceiling and get even light in the space, a linear light is being hidden into a ledge on the ceiling or wall. It is important to make a line of light continuously, choose seamless LED fixture and get enough space to hide the fixture and to do maintenance.

- **Luci Creide F** 20.6W 1190lm P.124
Dot-free, high enough lumen output with good appearance for direct lighting or cove lighting.

- **Luci Power FLEX EX series** 18.2W 1450lm | 12.1W 1020lm | 9.5W 700lm | 6.5W 520lm | 4.5W 370lm P.46
High efficient, MacAdam 3steps, suitable for curved cove or cornice as well. Various brightness, power consumption and LED pitching provide wide selection depending on the installation area. Using 45° rail can spread light to furthermore.

- **Luci UQ FLEX Indoor series** (Top bend) 15.8W 781lm | 12.6W 623lm | 6.4W 415lm P.32
Dot less flexible and cuttable on site. Both top bend and side bend are the same 16mm x 15 mm squarish shape, suitable for cove lighting with glossy finish on ceiling.

C Recessed line

Recessed line light in walls expands the possibilities of space design.

- **Luci nano Line** 7.2W 59lm P.154
nano line with ultra fine line light of 5.5mm width gives a sharp impression of space. Magnet installation parts can be used for where the maintenance is difficult.

- **Luci silux K** 13.3W 550lm | 8.1W 400lm | 4.3W 190lm P.134
12*16mm Squared shape fitting, dot free, seamless connection. Available lower wattage for glare-less accent line.

D Curved indirect light

Emphasizing the design by adding lights to curved cove lighting and the like.

- **Luci Power FLEX α** 10.4W 550lm P.82
Side bend type strip with minimum 300mm bending radius. Since light is emitted perpendicular to the direction of bending, the light can be efficiently applied to the ceiling surface of the curved cove.

- **Luci Power FLEX EX series** 18.2W 1450lm | 12.1W 1020lm | 9.5W 700lm | 6.5W 520lm | 4.5W 370lm P.46
Top bend type strip, high efficient, MacAdam 3steps, suitable for lightsource of surface lighting. Various brightness, power consumption and LED pitching provide wide selection depending on installation area.

- **Luci UQ FLEX α** 15.8W 573 lm | 12.6W 457 lm | 8.4W 305 lm P.32
Side bend dot-free flexible linear light with min. bending R150mm. Cuttable on site. Up to 10m per run, ideal for restricted driver installation locations.

E Surface mount

As an ambient or task lighting, a linear light can be installed on the ceiling or the wall.

- **Luci RECTA** 31.2W 2150lm P.112
Square shape with 3 surface light-emitting makes space simple and clean. Variety of fixture length is ideal for installing a random pattern of line or matching the length with site conditions. Over 2000lm/m is bright enough for use as ceiling light instead of fluorescent light.



F Display shelf, wardrobe

Since light does not reach the inside of the shelf or wardrobe only by using the lighting from the ceiling surface, it is common to install lighting inside the furniture. In stores, select dotless linear lighting to make the product look beautiful. The lighting is preferred to be hidden under the shelf by using small dimension one.

■ Luci silux K, silux wide K

P.134, 144

silux K 13.3W 550lm | 8.1W 400lm | 4.3W 190lm
silux wide K 13.3W 730lm | 8.1W 530lm | 4.3W 250lm

High color rendering, Ra>93 for retail stores.

silux K; squared shape, only 12 x 16mm dimension, suitable for using as recessed light at the edge of shelf board to light the light on the objects.

silux wide K; quarter circular shape, suitable for lighting to the back of the shelf.



G Headboard

H Mirror Lighting

Soft light wraps space from the head of the bed. Also, lighting around mirrors to make the appearance of faces brighter and more beautiful.

■ Luci silux K 13.3W 550lm | 8.1W 400lm | 4.3W 190lm P.134

Covered with the polycarbonate cover, square shape rigid light can be easy to install in the headboard. Variation of power consumption, 4, 8 and 13 W/m meets the requirement of brightness and limitation of power density.



■ Luci Power FLEX EX series

18.2W 1450lm | 12.1W 1020lm | 9.5W 700lm | 6.5W 520lm | 4.5W 370lm

Strip light with high color rendering Ra>93, suitable for mirror light. Use as backlit or as lightsource of diffused line light on the mirror.



I Step / floor

Improve safety with increased visibility of steps and floor surfaces, and highlight stairs in space by adding light to steps and foot lights.

■ Luci Flat FLEX F series

3.9W 280lm | 2.5W 180lm P.74

Only 14x 18.5mm dimension size including mounting rail and clip is ideal for under the edge of steps. Custom length is available every 62.4mm up to 5m.



■ Luci UQ FLEX Indoor series

Top bend) 15.8W 781lm | 12.6W 623lm | 6.4W 415lm

Dot less flexible and cuttable on site. Both top bend and side bend are the same 16mm x 15mm squarish shape, suitable for glossy floor finish and curved step.



Dynamic white series

Create an appropriate atmosphere for a scene by the color and light adjustable lighting. Suitable for office, hospital and all day restaurant. Contributes to a healthy life in a lighting space that does not break the circadian rhythm.

■ Luci THOF 31.2W 2370lm P.118

Square shaped rigid light, max 2370 lm/m. Ideal for surface mount, cove light where is required high brightness. Free choice of two different CCT from 2400K to 5000K.



■ Luci Power FLEX THOF

11W 660lm P.68

Strip light with soft acrylic clear tube, max 660 lm/m. Ideal for indirect light, curved cove light. Free choice of two different CCTs from 1900K to 5000K and Blue..



■ Luci Vivoxo Graze THOF

38.9W 3655lm P.104

The brightest dynamic white option in Luci. Maximum 3520lm which is sufficient for task lighting as well as wall grazing light. Upgraded to CRI 90 for most of the color range, available from 2200K to 5000K.



LFU / LFUA NEW



TOKYO MIDTOWN HIBIYA
Location: Japan
Architect office: NOMURA Co., Ltd.

Lighting Design: Noosa Design Co., Ltd.
Construction: KAJIMA CORPORATION
Photo: Nacása & Partners Inc.



JG Dubai
Location: Dubai
Architects Office: Curiosity

Lighting Design: L'Observatoire International
Construction: RK Gulf LLC
Photo: Nacása & Partners Inc.

Luci UQ FLEX / Luci UQ FLEX α

Homogenous bendable linear light cuttable every 50mm at site

Ideal choice to avoid unpleasant dot reflection
for any curved concealed lighting

LFU: Vertical (Top) bend

LFUA: Horizontal (Side) bend

Specifications

Dimensions

Cross section W 16 x H 15 mm
Custom order up to 5m at every 50 mm length with both ends or one end feed cable
Up to 5 m in 50 mm increment


Feed cables are available in two directions: side or back feed

Cuttable the LED fixture every 50mm at site. If a luminaire with a both-side feed cable is cut, the left and right sides of the luminaire can be used separately, as if the luminaire were a one-side feed.

Electrical & Output


Model	15	12	8
Power Consumption (W/m)	15.8	12.6	8.4
Luminous flux @ 3000K (lm/m)			
UQ FLEX (LFU) Top bend	774	617	411
UQ FLEX α (LFUA) Side bend	573	457	305

Color temperature




Please refer to the product specification page for the delivered CCT.

Optics



- Unique rounded corner light emitting surface for wide light distribution for less unpleasant peaks on the illuminated surface
- Cross-sectional size common to LFU-I and LFUA-I

Min Bending radius



Features

Cable feed directions


Back feed

For cove/recessed light in various cable outgoing directions




Side(Right) feed

For indirect cove


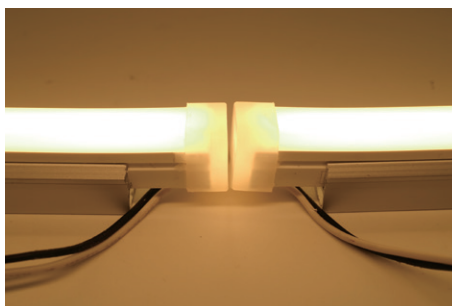


Less visible dark spot at joint
Easy and safe connection of two fixtures
with attached connector

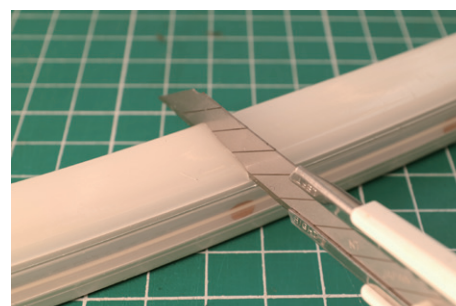

Customise and cuttable at site every 50mm length
Suitable for complex length projects
which can't expect accurate length when ordering


Up to 10m of luminaire per run. Less concern of PSU location!

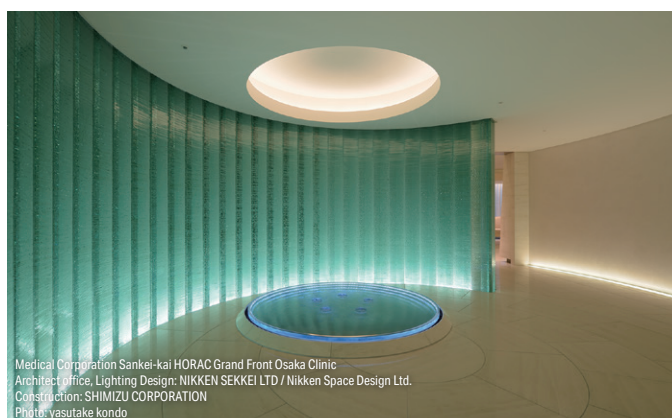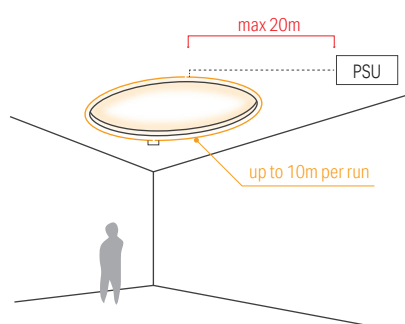

Color management
MacAdam 3 step



- Top bend dot-free flexible light, cuttable every 50mm at site
- Indoor usage only, custom length max.5m per roll, connectable 10m in run

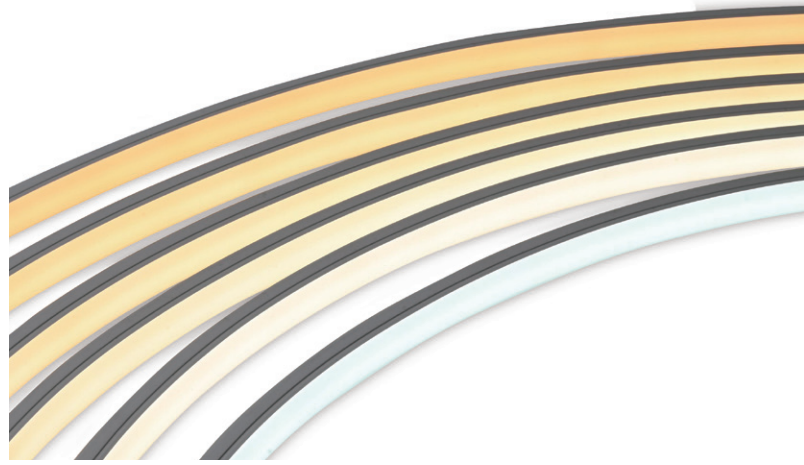


Model No.

LFU - **T** ☐ ☐ ☐ ☐ ☐ - ☐ - **DF** - **I** - ☐

Product Name	Length	Lead wire	Light source color	Tube type	Wattage
LFU	Refer to Custom order length	W: Bothends S: Oneend Lead wire B: Back feed R: Side(Right) feed	D : Daylight white N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L21 : Warm white 2100K L19 : Warm white 1900K	DF: Diffuser Environment I: Indoor	15: 15.8 W/m 12: 12.6 W/m 8: 8.4 W/m

Light Intensity

Refer to P.44



Specification

Model No.	LFU-T1000S/W S/R-□-DF-I-15			LFU-T1000S/W S/R-□-DF-I-12			LFU-T1000S/W S/R-□-DF-I-8		
Power consumption	15.8 W/m			12.6 W/m			8.4 W/m		
Fitting length(L)	1000mm (Refer to Custom order length)			1000mm (Refer to Custom order length)			1000mm (Refer to Custom order length)		
Weight	-			-			-		
Luminaire efficacy(2700K)	49 lm/W			49 lm/W			49 lm/W		
Light source color	Delivered CCT	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.							
D 6500K Ra92	6000K	908lm	*	724lm	*	483lm	*		
N 5300K -	-	-	*	-	*	-	*		
W 4200K Ra93	4000K	921lm	○	734lm	○	490lm	○		
WW 3500K Ra93	3200K	856lm	○	683lm	○	455lm	○		
L30 3000K Ra94	2700K	774lm	○	617lm	○	411lm	○		
L27 2700K Ra93	2500K	781lm	○	623lm	○	415lm	○		
L24 2400K Ra93	2300K	718lm	○	573lm	○	382lm	○		
L21 2100K -	-	-	*	-	*	-	*		
L19 1900K -	-	-	*	-	*	-	*		

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length	5m
Max. length Per circuit	10m
Min. bending range	R150mm
Material (body)	Silicone
Attachments	-
Option parts	① Mounting rail set ② Mounting parts set ③ Mounting Clip ④ End cap ⑤ Power supply cable ⑥ Joint cable
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required


Luci UQ FLEX (15.8 W/m, 12.6 W/m, 8.4 W/m)

Corresponds to Length of Model No. and External dimensions


0050	0650	1250	1850	2450	3050	3650	4250	4850
0100	0700	1300	1900	2500	3100	3700	4300	4900
0150	0750	1350	1950	2550	3150	3750	4350	4950
0200	0800	1400	2000	2600	3200	3800	4400	5000
0250	0850	1450	2050	2650	3250	3850	4450	
0300	0900	1500	2100	2700	3300	3900	4500	
0350	0950	1550	2150	2750	3350	3950	4550	
0400	1000	1600	2200	2800	3400	4000	4600	
0450	1050	1650	2250	2850	3450	4050	4650	
0500	1100	1700	2300	2900	3500	4100	4700	
0550	1150	1750	2350	2950	3550	4150	4750	
0600	1200	1800	2400	3000	3600	4200	4800	

External dimensions


W: Both ends lead, B: Back feed

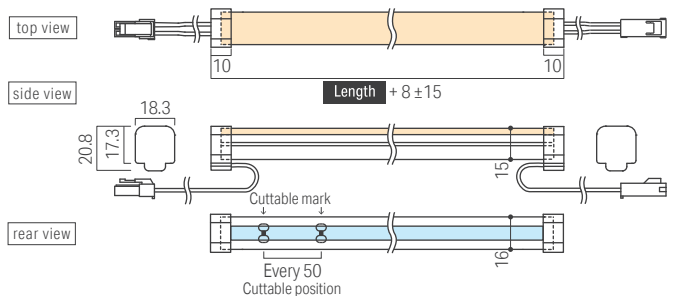

W: Both ends lead, R: Side(Right) feed



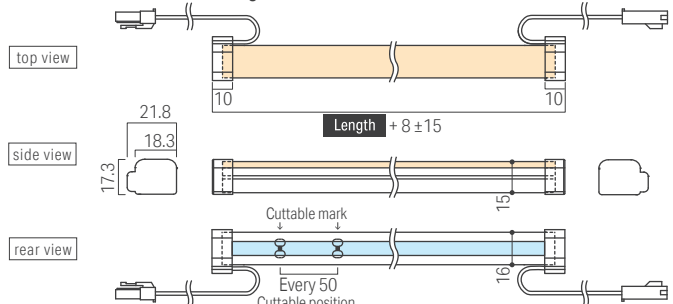


Cross sectional view when installing optional items

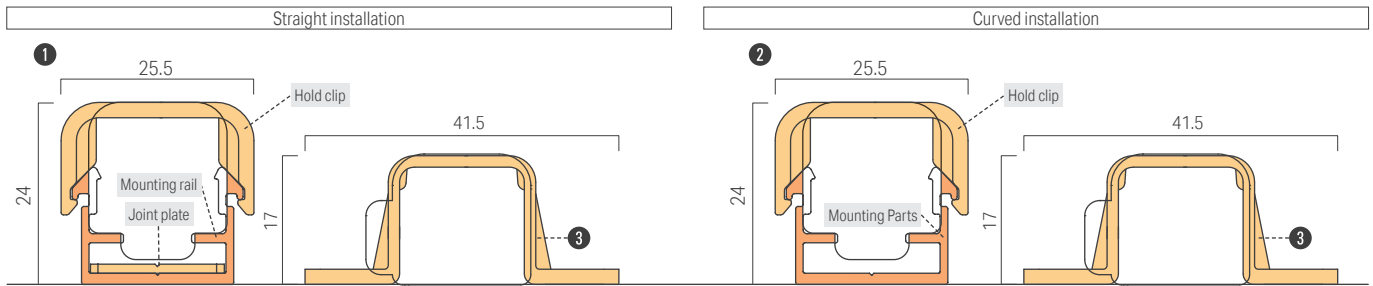


Option parts



- 1** Aluminium mounting rail 950 set for UQ FLEX Indoor
Model No : LFU-RL0950-AL-C-I
The set includes Mounting rail (1pc) and PC Hold clip (5 pcs/bag) and Joint plate (1pc)
For straight installation (Back/Side feed)

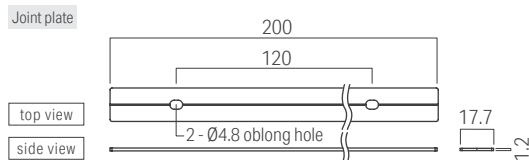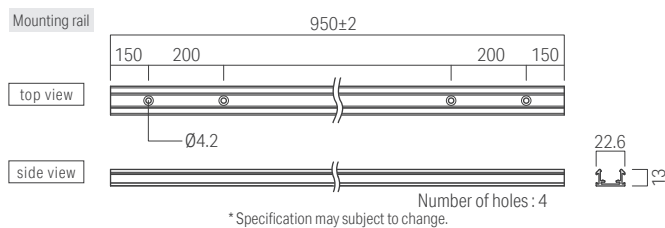


- 3** PC Mounting clip for UQ FLEX
Model No : LFU-RC
5 pcs/bag
Recommended 5 pcs/m
For curved installation (Side feed)
*When back feed, need a hole for endcap on installation surface.




- 2** AL mounting parts set for UQ FLEX Indoor
Model No : LFU-RL0018-AL-C-I
The set include Mounting parts (5 pcs/bag) and PC Hold clip (5 pcs/bag)
Recommended each 5 pcs/m
For curved installation (Back/Side feed)

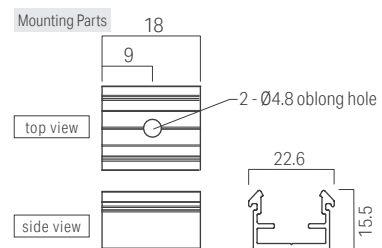


- 4** Endcap for UQ FLEX indoor
Model No : LFU-EC
Attached with LED fixture (2pcs/bag)
for extra order 2pcs/bag



- 5** Power supply cable 3000mm for SL connector **Required**
Model No : CAD-3000-MCNC-I



- 6** Joint cable 1000mm / 5000mm for SL connector
Model No : CAD-1000-MCFC-I / CAD-5000-MCFC-I



Max. connectable length per power supply


Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
15.8W/m	12.6W/m	8.4W/m	50W power supply
~2.2m	~2.9m	~4.3m	
~4.4m	~5.8m	~8.7m	100W power supply
~6.6m	~8.7m	~13.1m*	150W power supply

LFUA NEW

Color management
MacAdam 3 step



- Side bend dot-free flexible light, cuttable every 50mm at site
- Indoor usage only, custom length max.5m per roll, connectable 10m in run

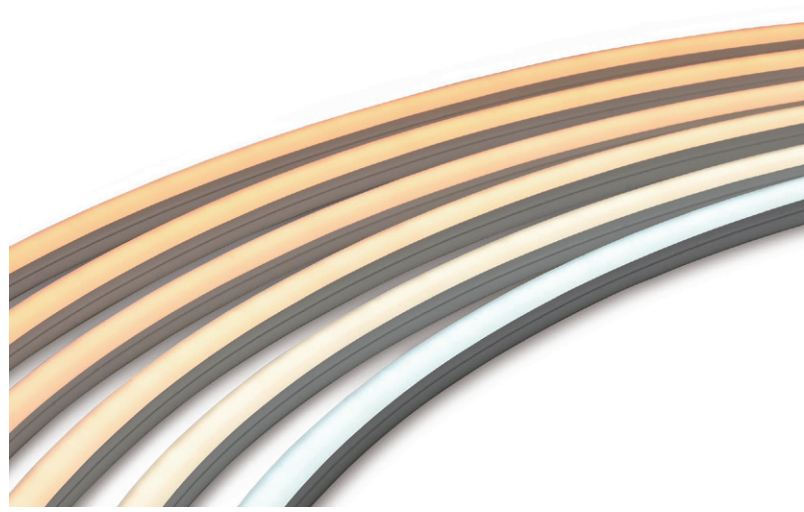


Model No.

LFUA - **T** ☐ ☐ ☐ ☐ ☐ ☐ - ☐ - **DF** - **I** - ☐

Product Name	Length	Lead wire	Light source color	Tube type	Wattage
LFUA	Refer to Custom order length	W: Bothends S: Oneend Lead wire B: Back feed R: Side(Right) feed	D : Daylight white N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L21 : Warm white 2100K L19 : Warm white 1900K	DF: Diffuser Environment I: Indoor	15: 15.8 W/m 12: 12.6 Wm 8: 8.4 W/m

Light Intensity

Refer to P.45



Specification

Model No.				LFUA-T1000S/W S/R-□-DF-I-15		LFUA-T1000S/W S/R-□-DF-I-12		LFUA-T1000S/W S/R-□-DF-I-8	
Power consumption				15.8 W/m		12.6 W/m		8.4 W/m	
Fitting length(L)				1000mm (Refer to Custom order length)		1000mm (Refer to Custom order length)		1000mm (Refer to Custom order length)	
Weight				-		-		-	
Luminaire efficacy(2700K)				36.3 lm/W		36.3 lm/W		36.3 lm/W	
Light source color		Delivered CCT		○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.					
D	6500K	Ra92	6000K	687lm	*	548lm	*	365lm	*
N	5300K	-	-	-	*	-	*	-	*
W	4200K	Ra93	4000K	694lm	○	553lm	○	369lm	○
WW	3500K	Ra93	3200K	632lm	○	504lm	○	336lm	○
L30	3000K	Ra94	2700K	573lm	○	457lm	○	305lm	○
L27	2700K	Ra93	2500K	561lm	○	448lm	○	298lm	○
L24	2400K	Ra93	2300K	522lm	○	416lm	○	278lm	○
L21	2100K	-		-	*	-	*	-	*
L19	1900K	-		-	*	-	*	-	*

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length	5m
Max. length Per circuit	10m
Min. bending range	R150mm
Material (body)	Silicone
Attachments	-
Option parts	① Mounting rail set ② Mounting parts set ③ Mounting Clip ④ End cap ⑤ Power supply cable ⑥ Joint cable
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required


Luci UQ FLEX α (15.8 W/m, 12.6 W/m, 8.4 W/m)

Corresponds to Length of Model No. and External dimensions


0050	0650	1250	1850	2450	3050	3650	4250	4850
0100	0700	1300	1900	2500	3100	3700	4300	4900
0150	0750	1350	1950	2550	3150	3750	4350	4950
0200	0800	1400	2000	2600	3200	3800	4400	5000
0250	0850	1450	2050	2650	3250	3850	4450	
0300	0900	1500	2100	2700	3300	3900	4500	
0350	0950	1550	2150	2750	3350	3950	4550	
0400	1000	1600	2200	2800	3400	4000	4600	
0450	1050	1650	2250	2850	3450	4050	4650	
0500	1100	1700	2300	2900	3500	4100	4700	
0550	1150	1750	2350	2950	3550	4150	4750	
0600	1200	1800	2400	3000	3600	4200	4800	

External dimensions


W: Both ends lead, B: Back feed

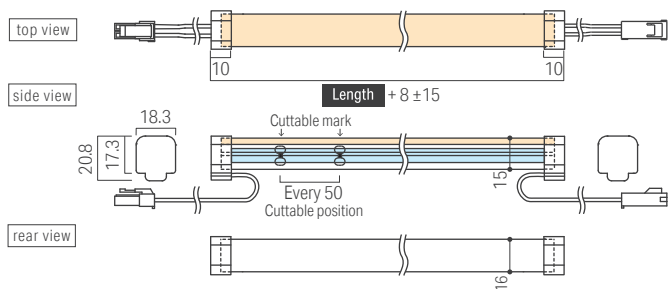

W: Both ends lead, R: Side(Right) feed


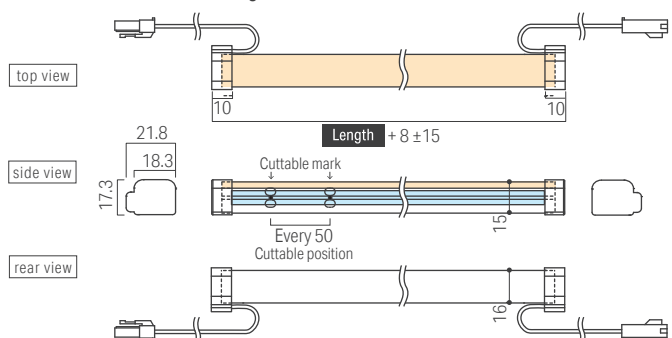


Cross sectional view when installing optional items

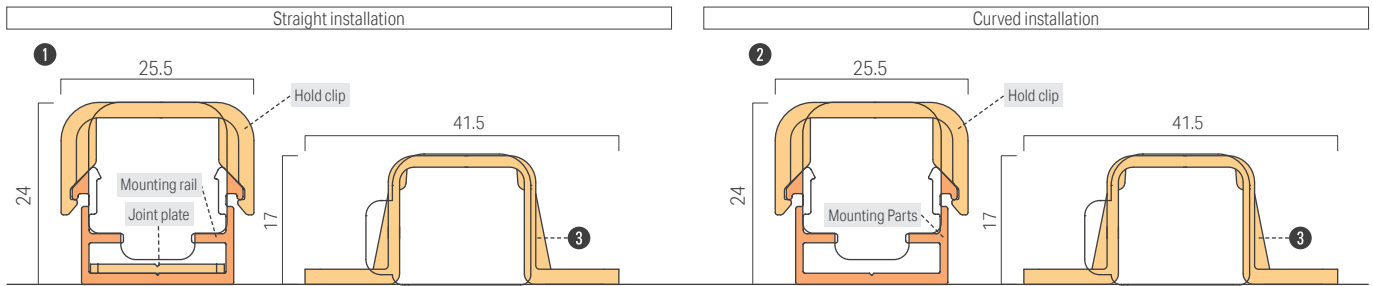


Option parts


- 1** Aluminium mounting rail 950 set for UQ FLEX Indoor
Model No : LFU-RL0950-AL-C-I
The set include Mounting rail (1pc) and PC Hold clip (5 pcs/bag) and Joint plate (1pc)
For straight installation (Back/Side feed)

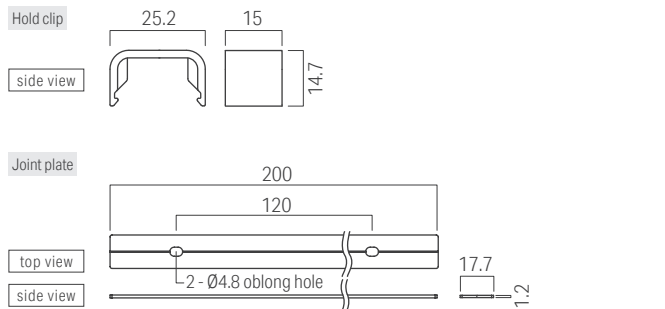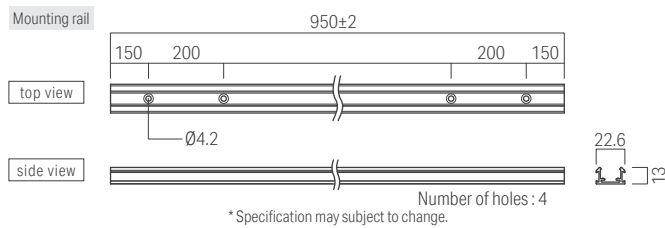


- 3** PC Mounting clip for UQ FLEX
Model No : LFU-RC
5 pcs/bag
Recommended 5 pcs/m
For curved installation (Side feed)
*When back feed, need a hole for endcap on installation surface.




- 2** AL mounting parts set for UQ FLEX Indoor
Model No : LFU-RL0018-AL-C-I
The set include Mounting parts (5 pcs/bag) and PC Hold clip (5 pcs/bag)
Recommended each 5 pcs/m
For curved installation (Back/Side feed)

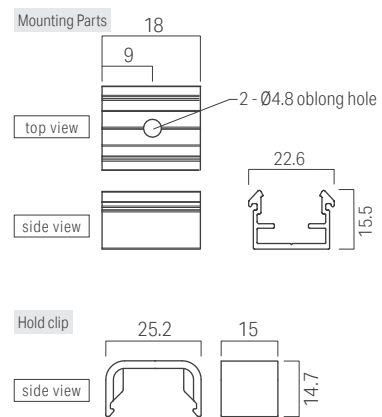


- 4** Endcap for UQ FLEX indoor
Model No : LFU-EC
Attached with LED fixture (2pcs/bag)
for extra order 2pcs/bag



- 5** Power supply cable 3000mm for SL connector **Required**
Model No : CAD-3000-MCINN-I



- 6** Joint cable 1000mm / 5000mm for SL connector
Model No : CAD-1000-MCFC-I / CAD-5000-MCFC-I



Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
15.8W/m	12.6W/m	8.4W/m	50W power supply
~2.2m	~2.9m	~4.3m	
~4.4m	~5.8m	~8.7m	100W power supply
~6.6m	~8.7m	~13.1m*	150W power supply


Luci UQ FLEX / Luci UQ FLEX α

Installing the product


Installation with Mounting rail

1 Aluminium mounting rail 950 set for UQ FLEX Indoor (LFU-RL0950-AL-C-I)


- ① Fix the aluminium rail by screws (pan head screw M4 recommended) supplied by installer. The screw holes at both ends should be left unused for installing with the Joint plate.

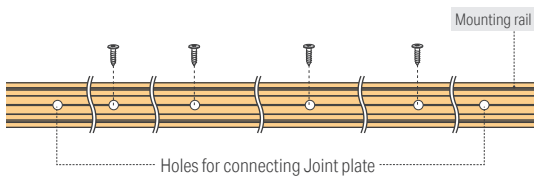


- ② When two or more rails are installed in a straight line, insert the Joint plate into bottom of the rail.

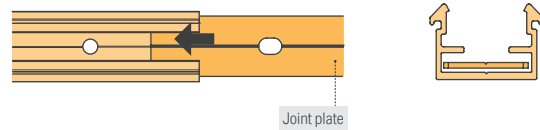


- ③ Put the second rail and slide the Joint plate as below.

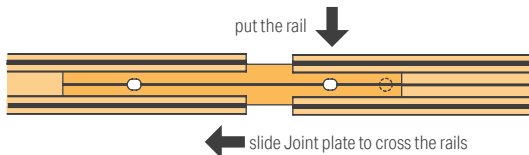

- ④ Fix the holes of rails and plate altogether by screws.

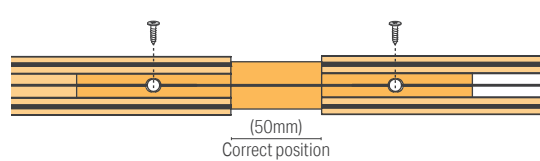


- ⑤ Fix the holes of second rail for installation like ①...




LFU-I Top / Vertical bend only

- ⑥ Hold one side of the LED fixture and gradually push on the other side into the aluminum rail.

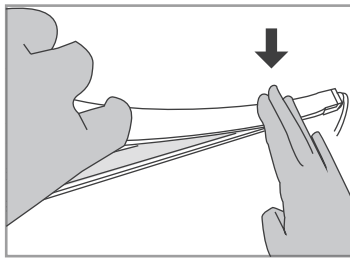


LFUA-I Side / Horizontal bend only

- ⑥ When installing LFUA (side bend) on the mounting rail, the LED fixture shall first be placed horizontally on the rail and the entire LED fixture shall be pushed gradually horizontally into the rail so that the LED fixture does not bend vertically.

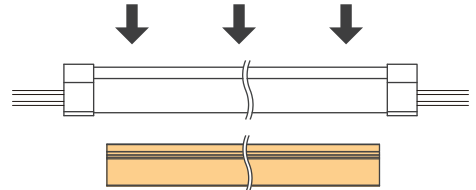

- ⑦ Push the PC hold clip for UQ FLEX rail (LFU-PT-B) until click sound and make sure it is securely locked. SUS hold clip is recommended in the environment where requires durability or downwards installation. Recommended number of LFU-PT-B is minimum 3 pcs/m.




Installation with Mounting clip

3 PC Mounting clip for UQ FLEX (LFU-RC)

- ① Place the LED fixture on the surface to be installed. Do not twist and bend the LED fixture in the wrong direction.

- ② Fix the mounting clip by 2pcs of screws supplied by installer.(pan head screw M4 recommended) The recommended distance between clips is 200 mm or less. The clips at both ends should be 50 mm away from the ends of the LED luminaire to prevent it from lifting.

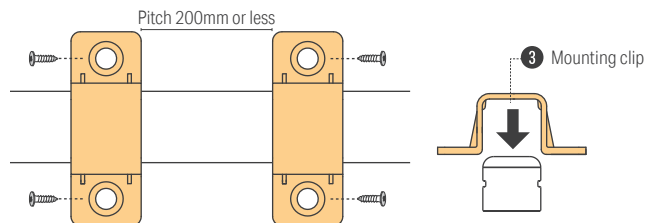


Installation with Mounting parts

2 AL mounting parts set for UQ FLEX Indoor (LFU-RL0018-AL-C-I)

- ① Fix the aluminum mounting parts by 1 pc of screw to the points where the LED fixture is to be installed. (pan head screw M4 recommended) The recommended distance between clips is 200 mm or less. The mounting parts at both ends should be 50 mm away from the ends of the LED fixture to prevent it from lifting.

- ② Push the LED fixture into the clip while keeping the correct bending direction. Caution: Do not bend the LED fixture in the wrong direction.



- ③ Put the PC hold clip (LFU-PT-B) until click sound and make sure it is securely locked. The hold clips should be used if the LED fixture is easily dislodged or installed downward.

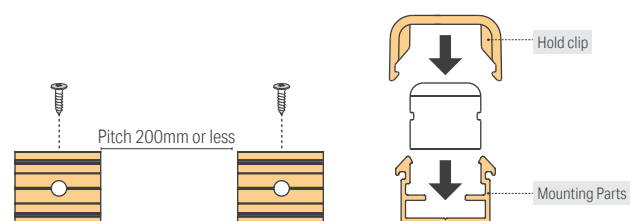

Cutting and terminal sealing



LFU-I Top / Vertical bend only

Pen knife/Box cutter
Push the blade straight down



LFUA-I Side / Horizontal bend only

Pen knife/Box cutter
Push the blade straight down



Wipe off any dirt, etc. from the adhesive area.


Use a thin blade such as a Pen knife/Box cutter for cutting.
Use of thick blades, scissors, nippers, etc. will bend the board and cause malfunctions.

When cutting the LED fixture, be sure to cut at the cutting marks shown above. If anywhere other than the cut mark is cut, the LED fixture will not turn on. When cutting, push the blade straight down along the cutting mark. Pulling the blade back and forth like a saw may cause the circuit board to fold, resulting in malfunction.

Cutting should always be done on a flat, stable surface.

The cut and insulated LED fixture with end cap can only be used indoors. Do not install the products in wet or humid places.

Before installation and lighting, check that the cap adheres properly.

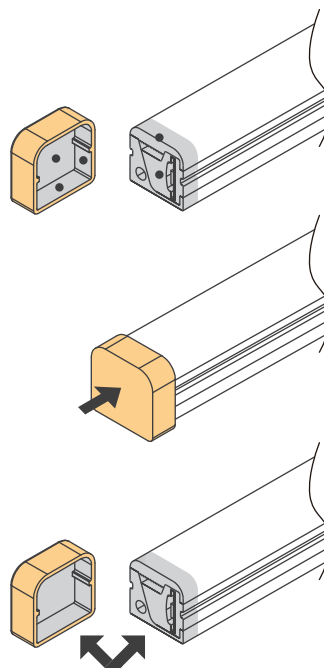


Apply primer on the cut area of the light fixture and the inside of the cap (gray area in the figure).

Apply sufficient adhesive on the cut area of the LED fixture and the inside of the cap (gray area in the figure).

Immediately attach the end cap to the LED fixture and dry it for at least 30 minutes.

System configuration diagram

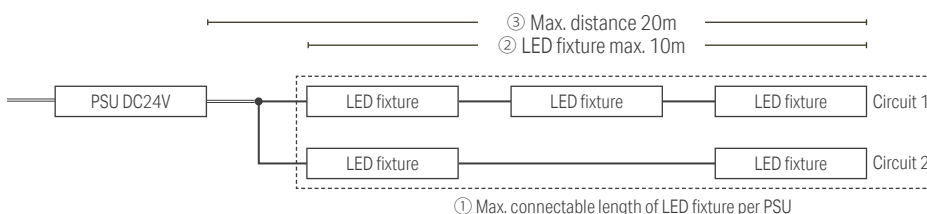

① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)

② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.

③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
15.8W/m	12W/m	8W/m	50W power supply
~2.2m	~2.9m	~4.3m	
~4.4m	~5.8m	~8.7m	100W power supply
~6.6m	~8.7m	~13.1m*	150W power supply

Luci UQ FLEX / Luci UQ FLEX α

Luci UQ FLEX Indoor -Custom order-

Model No.

Product name	Length	Lead wire	Light source color	Tube type	Environment	Wattage
LFU - T □□□□ □□ - □ - DF - I - □	Refer to "Custom order products size"	W Both ends lead wire S One end lead wire B Back feed R Side(Right) feed	D Daylight! white 6500K N Natural white 5300K W White 4200K WW Warm white 3500K 3500K L30 Warm white 3000K 3000K L27 Warm white 2700K 2700K L24 Warm white 2400K 2400K L21 Warm white 2100K 2100K L19 Warm white 1900K 1900K	DF Diffuser	I Indoor	15 15.8W 12 12.6W 8 8.4W

External dimension

<p>Luci UQ FLEX Indoor / W Both ends lead wire, B Back feed</p> <p>LFU - T□□□□ WB - □ - DF - I - □</p> <p>Length Color Wattage</p>	<p>Luci UQ FLEX Indoor / S One end lead wire, B Back feed</p> <p>LFU - T□□□□ SB - □ - DF - I - □</p> <p>Length Color Wattage</p>
<p>Luci UQ FLEX Indoor / W Both ends lead wire, R Side(Right) feed</p> <p>LFU - T□□□□ WR - □ - DF - I - □</p> <p>Length Color Wattage</p>	<p>Luci UQ FLEX Indoor / S One end lead wire, R Side(Right) feed</p> <p>LFU - T□□□□ SR - □ - DF - I - □</p> <p>Length Color Wattage</p>

Custom order products size

Luci UQ FLEX (15.8 W/m, 12.6 W/m, 8.4 W/m)																
Corresponds to Length of Model No. and External dimensions																
0050	0350	0650	0950	1250	1550	1850	2150	2450	2750	3050	3350	3650	3950	4250	4550	4850
0100	0400	0700	1000	1300	1600	1900	2200	2500	2800	3100	3400	3700	4000	4300	4600	4900
0150	0450	0750	1050	1350	1650	1950	2250	2550	2850	3150	3450	3750	4050	4350	4650	4950
0200	0500	0800	1100	1400	1700	2000	2300	2600	2900	3200	3500	3800	4100	4400	4700	5000
0250	0550	0850	1150	1450	1750	2050	2350	2650	2950	3250	3550	3850	4150	4450	4750	
0300	0600	0900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500	4800	

Luci UQ FLEX α Indoor -Custom order-

Model No.

LFUA - T□□□□ □□ - □ - DF - I - □

Product name

Length

Lead wire

Light source color

Tube type

Environment

Wattage

Refer to
"Custom order
products size"

W Both ends lead wire
S One end lead wire

B Back feed
R Side(Right) feed

D	Daylight white	6500K
N	Natural white	5300K
W	White	4200K
WW	Warm white 3500K	3500K
L30	Warm white 3000K	3000K
L27	Warm white 2700K	2700K
L24	Warm white 2400K	2400K
L21	Warm white 2100K	2100K
L19	Warm white 1900K	1900K

DF Diffuser


I Indoor

15 15.8W
12 12.6W
8 8.4W

External dimension


Luci UQ FLEX α Indoor / **W** Both ends lead wire, **B** Back feed

LFUA - T□□□□ **WB** - □ - DF - I - □

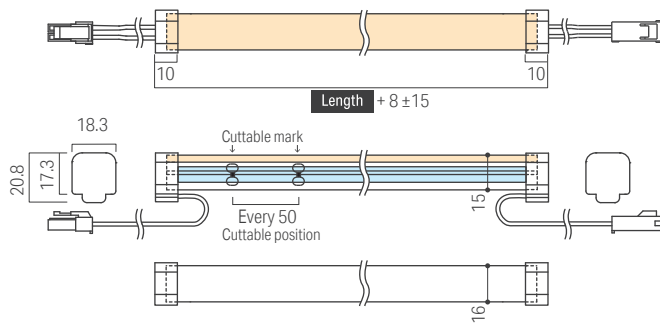


Luci UQ FLEX α Indoor / **S** One end lead wire, **B** Back feed

LFUA - T□□□□ **SB** - □ - DF - I - □

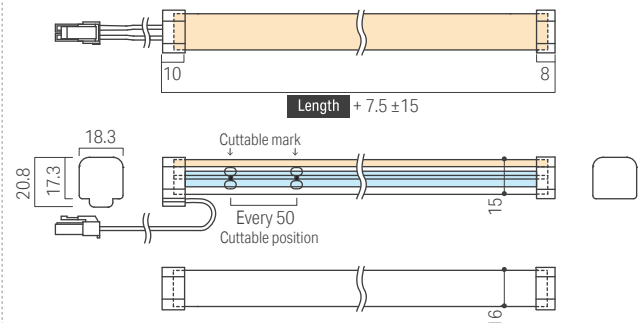


Luci UQ FLEX α Indoor / **W** Both ends lead wire, **R** Side(Right) feed

LFUA - T□□□□ **WR** - □ - DF - I - □

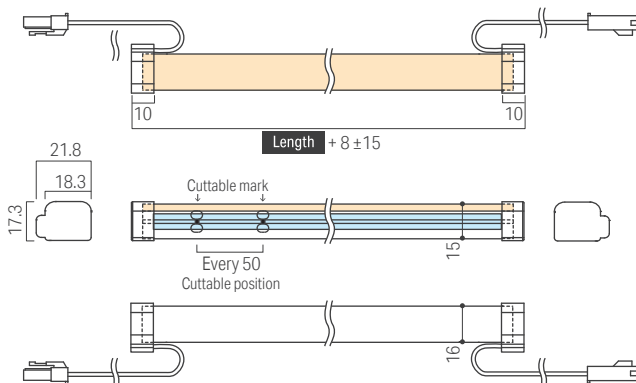

Luci UQ FLEX α Indoor / **S** One end lead wire, **R** Side(Right) feed

LFUA - T□□□□ **SR** - □ - DF - I - □

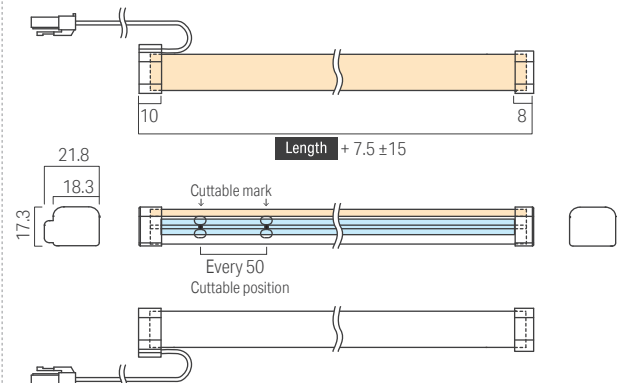

Custom order products size


Luci UQ FLEX α (15.8 W/m, 12.6 W/m, 8.4 W/m)

Corresponds to Length of Model No. and External dimensions

0050	0350	0650	0950	1250	1550	1850	2150	2450	2750	3050	3350	3650	3950	4250	4550	4850
0100	0400	0700	1000	1300	1600	1900	2200	2500	2800	3100	3400	3700	4000	4300	4600	4900
0150	0450	0750	1050	1350	1650	1950	2250	2550	2850	3150	3450	3750	4050	4350	4650	4950
0200	0500	0800	1100	1400	1700	2000	2300	2600	2900	3200	3500	3800	4100	4400	4700	5000
0250	0550	0850	1150	1450	1750	2050	2350	2650	2950	3250	3550	3850	4150	4450	4750	
0300	0600	0900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500	4800	

Luci UQ FLEX / Luci UQ FLEX α

Illuminance data



LFU Luci UQ FLEX


Color temperature

6500K 5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

Direct horizontal surface light intensity distribution chart


LFU-T1000**-D-DF-I-15

Light source color 6500K
Brightness 256 cd
Luminous flux 909 lm
Color rendering index Ra 93




LFU-T1000**-W-DF-I-15

Light source color 4200K
Brightness 260 cd
Luminous flux 921 lm
Color rendering index Ra 92




LFU-T1000**-WW-DF-I-15

Light source color 3500K
Brightness 242 cd
Luminous flux 857 lm
Color rendering index Ra 95




LFU-T1000**-L30-DF-I-15

Light source color 3000K
Brightness 211 cd
Luminous flux 774 lm
Color rendering index Ra 97




LFU-T1000**-L27-DF-I-15

Light source color 2700K
Brightness 214 cd
Luminous flux 781 lm
Color rendering index Ra 96



LFU-T1000**-L24-DF-I-15

Light source color 2400K
Brightness 203 cd
Luminous flux 712 lm
Color rendering index Ra 97



Illuminance data



LFUA Luci UQ FLEX α


Color temperature

6500K 5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

Direct horizontal surface light intensity distribution chart


LFUA-T1000**-D-DF-I-15

Light source color 6500K
Brightness 196 cd
Luminous flux 687 lm
Color rendering index Ra 94




LFUA-T1000**-W-DF-I-15

Light source color 4200K
Brightness 198 cd
Luminous flux 694 lm
Color rendering index Ra 92




LFUA-T1000**-WW-DF-I-15

Light source color 3500K
Brightness 180 cd
Luminous flux 632 lm
Color rendering index Ra 95




LFUA-T1000**-L30-DF-I-15

Light source color 3000K
Brightness 165 cd
Luminous flux 573 lm
Color rendering index Ra 97




LFUA-T1000**-L27-DF-I-15

Light source color 2700K
Brightness 161 cd
Luminous flux 562 lm
Color rendering index Ra 97



LFUA-T1000**-L24-DF-I-15

Light source color 2400K
Brightness 149 cd
Luminous flux 523 lm
Color rendering index Ra 97



LFPEX / LFPSC / LFP / LFPTH / LFTF / LFPA / LFXF

Luci FLEX series

3 years warranty

Top bend



Luci Power FLEX EX

Our next FLEX standard with preferable price

- Renewed to High CRI LED package, >Ra90
- High-energy efficacy achieving up to 92.4lm/W
- 3 steps MacAdam ellipse LED package
- 5 types of wattage and lumen output (18.2W, 12.1W, 9.5W, 6.5W, 4.5W per meter)
- 3 types of LED pitch (15mm, 20mm, 30mm)
- No need to attach aluminum profile for heat sink
- Customized length available up to 5m per roll



Luci Power FLEX Spect C

- High color rendering Ra>96 in 6500K and 5000K
- Ideal for inspection lighting, museum, office lighting
- Covered with soft acrylic tube
- Cuttable every 6 LEDs (125 mm)



Luci Power FLEX THOF

RENEWAL Dynamic White

Dynamic white strip light

- Change atmosphere by tuning the color temperature
- Arrange 2 colors of LED package alternately
- Free choice of two different CCTs from 1900K, 2400K, 2700K, 3000K, 4200K, 5300K and Blue
- Cuttable every 4 LEDs (83.2mm)
- Customized length available up to 5m per roll



Luci Power FLEX

- Short cuttable unit suitable for furniture lighting, and for unpredictable requirements on site (30mm in LFP15, 40mm in LFP20)
- 2 types of wattage (15.4W, 10.5W per meter)
- Customised length available up to 4.5m (LFP15), 5m (LFP20)



Luci Flat FLEX F

- Narrow LED pitch suitable for limited space installation (10mm pitch, 16mm pitch)
- Small section W10mm * H4mm
- 2 types of wattage (3.9W, 2.5W per meter)
- Customized length available up to 5m per roll



Why we use soft acrylic tube

-Maintain high transparency

Silicon is not contained in tube of Luci FLEX series.

Luci original soft acrylic prevents yellowing and preserves the original LED colors.

-High durability

The material properties of the tube for FLEX series are verified with resistant to secular changes such as deformation, discoloration, and deterioration by outdoor weather-resistant test* result.

-Protection against dust and external force

Compared to bare type LED strip, tube type LED strip is superior in terms of protection performance against external force and environmental factors which may cause damage to the circuit board and components.


Side bend



Luci Power FLEX α

High-powered LED strip with bending sideways

- Suitable for curved light trough
- Cuttable every 2 LEDs (40mm)
- Accessory for curved installation

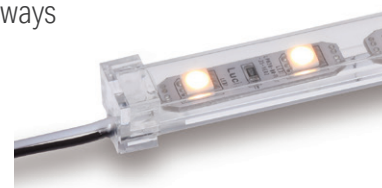

Luci FLEX α F

- Low-powered LED strip with bending sideways
- Side view LED package
- Small bending radius (Min. R 50mm)
- Narrow LED pitch suitable for limited space installation (10mm pitch)
- Small section W4mm * H10mm
- Customized length available up to 5m per roll



	Product Series	Series code	Wattage/m	Lumen/m	CRI	Cuttable unit	Custom order		IP65 available
							Max. length	Diffser Tube	
Top bend	Luci Power FLEX EX LFPEX P.46	LFPEX15	18.2 W/m	1496 lm/m	Ra 93	83.2 mm			
		LFPEX20	12.1 W/m	1016 lm/m	Ra 92	125 mm			
		LFPEX30(9.5W)	9.5 W/m	695 lm/m	Ra 91	166.2 mm	○	5m	○ P.190
		LFPEX30(6.5W)	6.5 W/m	516 lm/m	Ra 93	166.2 mm			
		LFPEX30(4.5W)	4.5 W/m	371 lm/m	Ra 93	166.2 mm			
	Luci Power FLEX Spect C LFPSC P.56	LFPSC20	14.2 W/m	965 lm/m	Ra96	125 mm	N/A	N/A	N/A
	Luci Power FLEX LFP P.60	LFP15	15.4 W/m	790 lm/m	Ra 90	30 mm	○	4.5m	○ P.196
		LFP20	10.5 W/m	563 lm/m		40 mm		5m	
	Luci Power FLEX THOF LFPTH Dynamic White P.68	LFPTH	11 W/m	281 lm/m	Ra 86	83.2 mm	○	5m	N/A
	Luci Flat FLEX F LFTF P.74	LFTF10	3.9 W/m	282 lm/m	Ra 87	62.4 mm	○	5m	○ P.202
		LFTF16	2.5 W/m	176 lm/m		100 mm			
Side bend	Luci Power FLEX α LFPA P.82	LFPA20	10.4 W/m	586 lm/m	Ra 90	40 mm	N/A	N/A	N/A
	Luci FLEX α F LFXF P.88	LFXF10	3.9 W/m	252 lm/m	Ra 71	62.4 mm	○	5m	○ P.208

LFPEX



TOKYO MIDTOWN HIBIYA
Location: Japan
Architect office: NOMURA Co., Ltd.

Lighting Design: Noosa Design Co., Ltd.
Construction: KAJIMA CORPORATION
Photo: Nacasa & Partners Inc.



Sun House
Location: Hong Kong
Client: The Sun Company Limited
Architect: Shadow Design




Luci Power FLEX EX

Best - selling strip light with superb price-performance
ideal for large scale projects.
Application is ideal for concealed lighting
with sufficient depth, backlit for light box.

Specifications

Dimensions

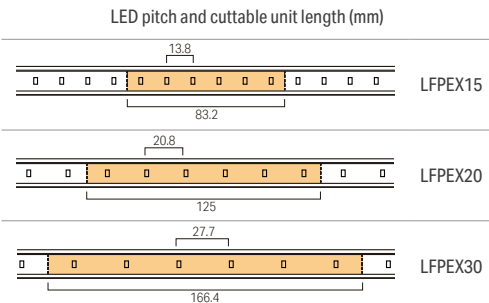

Cross section W 15 x H 4.5 mm

Standard length 1m with both ends open end wire


Custom order up to 5m lengths at every unit length with both ends or one end feed cable

Cuttable luminaire at site at scissor mark. If a luminaire with a both side feed cable is cut, the left and right sides of the luminaire can be used separately, as if the luminaire were one side feed.

Electrical & Output

Model	LFPEX15	LFPEX20	LFPEX30	LFPEX30	LFPEX30
Power Consumption (W/m)	18.2	12.1	9.5	6.5	4.5
Luminous flux @ 3000K (lm/m)	1493	1008	644	408	308

Color temperature




Min Bending radius

R 50mm in top (vertical) bend direction




Accessories


Mounting rail 1000 for Power FLEX





45° Mounting rail 1000 for Power FLEX



Easy to cut these rails at site as it's made by AES material

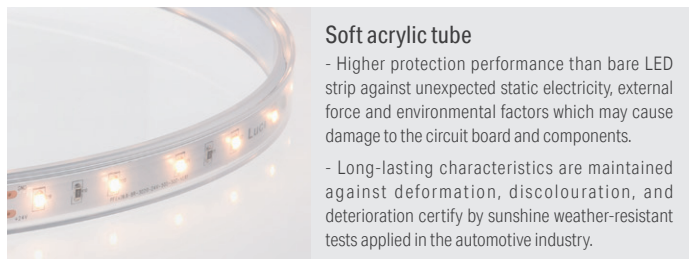

Project reference

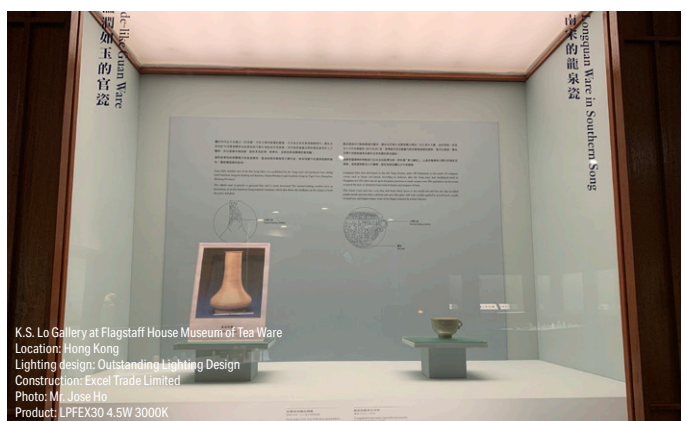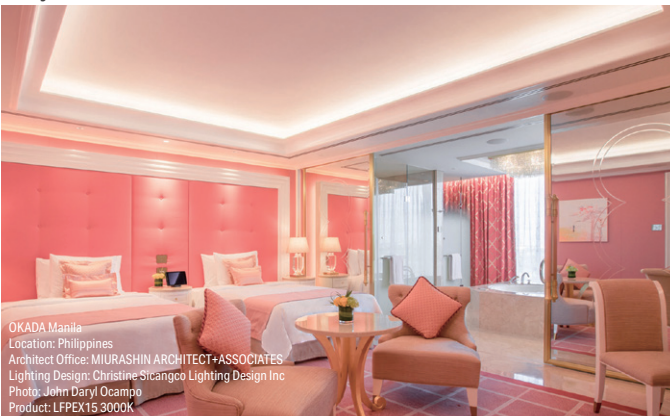

Discontinued

Luci Power FLEX EX

LFPEX

Color management
MacAdam 3 step

CE

3 years warranty


- High-energy efficacy achieving up to 92lm/W
- 5 types of wattage and lumen output in 3 kinds of LED pitch
- Covered by soft acrylic tube



Model No.

LFPEX -T - -CL-I


Product Name / LED pitch	Length / Lead wire	Light source color	Tube type	Environment	Wattage	
LFPEX15 : 15mm pitch	Custom order length P.51	N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L21 : Warm white 2100K L19 : Warm white 1900K	CL : Clear	I : Indoor	only for LFPEX30 9 : 9.5W 6 : 6.5W 4 : 4.5W	
LFPEX20 : 20mm pitch						
LFPEX30 : 30mm pitch						
W : Both ends S : One ends						



Specification @ Clear cover

LED pitch	15mm pitch	20mm pitch	30mm pitch														
Model No.	LFPEX15-T1000W-□-CL-I	LFPEX20-T1000W-□-CL-I	LFPEX30-T1000W-□-CL-I-9	LFPEX30-T1000W-□-CL-I-6	LFPEX30-T1000W-□-CL-I-4												
Power consumption	18.2W/m	12.1W/m	9.5W/m	6.5W/m	4.5W/m												
Fitting length	1011mm	1011mm	1011mm														
Weight	60g	60g	60g														
Cutttable unit	83.2mm (6 LED)	125mm (6 LED)	166.2mm (6 LED)														
Luminaire efficacy (2700K)	86.6 lm/W	88.2 lm/W	85.2 lm/W	89.6 lm/W	92 lm/W												
Light source color											○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent						
D	6500K	-		-		-		-		-		-		-		-	
N	5300K	Ra 92	*	1692 lm	Ra 92	*	1150 lm	Ra 92	*	847 lm	Ra 92	*	536 lm	Ra 92	*	405 lm	
W	4200K	Ra 93	○	1680 lm	Ra 93	○	1125 lm	Ra 93	○	812 lm*	Ra 93	○	514 lm*	Ra 93	○	388 lm*	
WW	3500K	Ra 93	○	1620 lm	Ra 93	○	1101 lm	Ra 93	○	704 lm*	Ra 93	○	446 lm*	Ra 93	○	337 lm*	
L30	3000K	Ra 94	○	1493 lm	Ra 94	○	1008 lm	Ra 94	○	644 lm	Ra 94	○	408 lm	Ra 94	○	308 lm	
L27	2700K	Ra 93	○	1496 lm	Ra 92	○	1016 lm	Ra 92	○	643 lm	Ra 92	○	407 lm	Ra 92	○	307 lm	
L24	2400K	Ra 93	○	1260 lm	Ra 93	○	856 lm	Ra 93	○	592 lm	Ra 93	○	375 lm	Ra 93	○	283 lm	
L21	2100K	Ra 93	*	1100 lm	Ra 96	*	748 lm	Ra 96	*	550 lm	Ra 96	*	348 lm	Ra 96	*	263 lm	
L19	1900K	Ra 63	*	1405 lm	Ra 63	*	955 lm	Ra 63	*	703 lm	Ra 63	*	445 lm	Ra 63	*	336 lm	


General Specification	
Input voltage	DC24V
LED beam angle	120°
Environment	Indoors (no condensation)
Max. length per circuit	5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachments	⑥ End cap 2pcs
Option parts	① ② ③ Mounting rail ④ ⑤ Mounting clip ⑥ End cap ⑦ Magnet
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

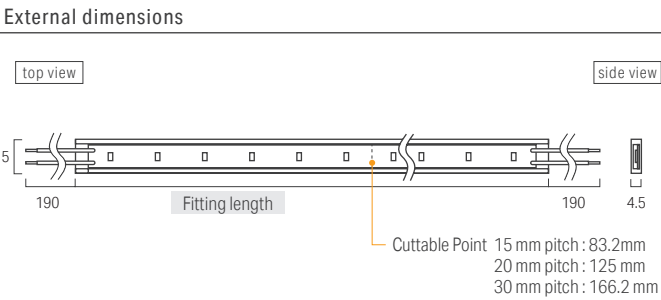








Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits					Power supply
15mm pitch	20mm pitch	9.5W	30mm pitch		
			6.5W	4.5W	
~1.9m	~2.8m	~3.6m	~5.3m*	~7.7m*	50W power supply
~3.8m	~5.7m*	~7.3m*	~10.7m*	~15.5m*	100W power supply
~5.7m*	~8.6m*	~11m*	~16.1m*	~23.3m*	150W power supply

Cross sectional view when installing optional items

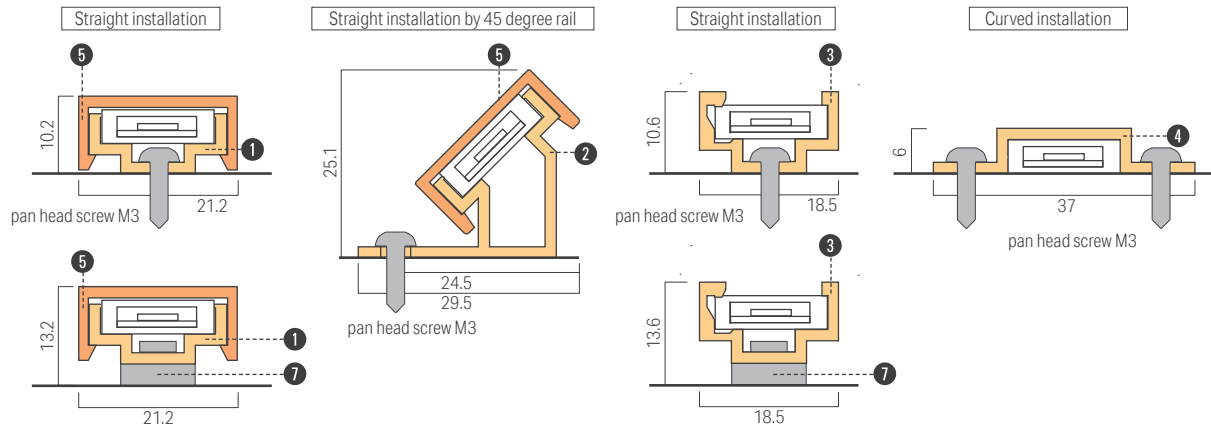


Option parts

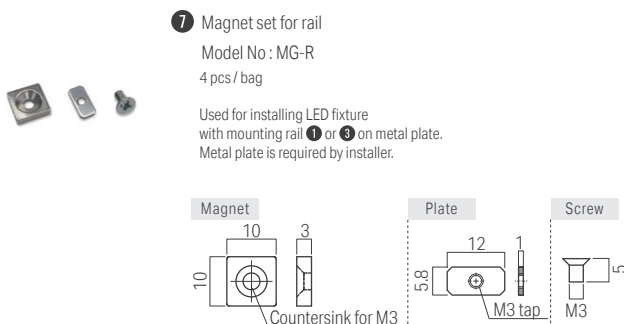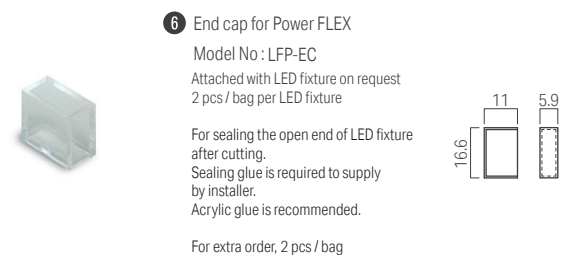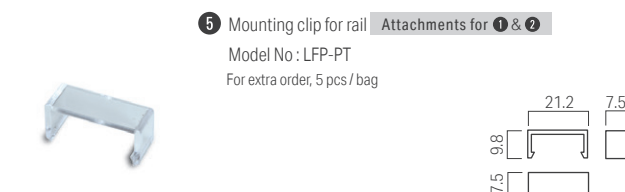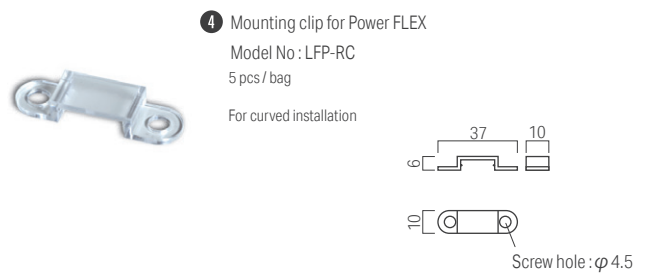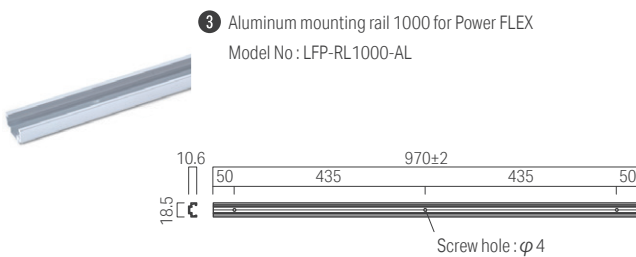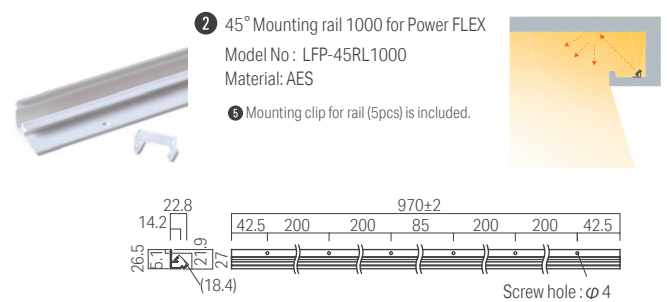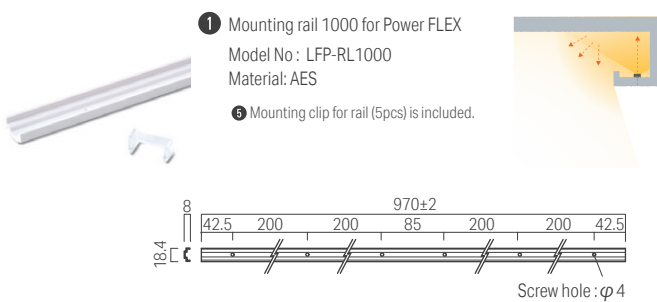

Luci Power FLEX EX


Installing the product

Straight installation

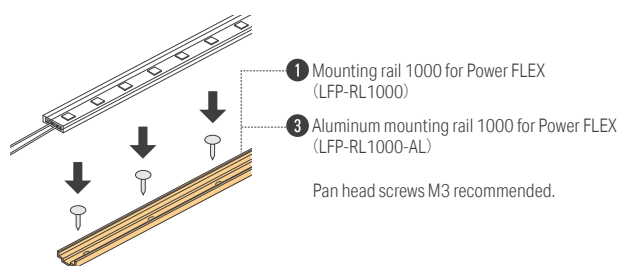


Magnet Installation


Mounting rail 1000 for Power FLEX

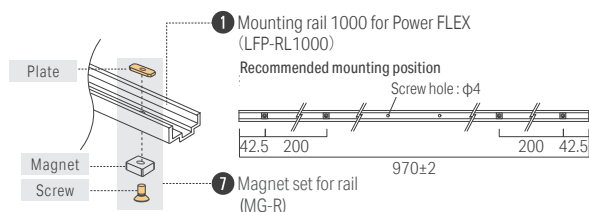

Cove lighting




Cornice lighting




For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m
* In case of Aluminum mounting rail 1000 for Power FLEX, Mounting clip for rail is not necessary.


Aluminum mounting rail 1000 for Power FLEX

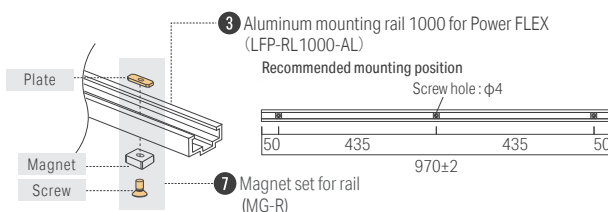


Straight installation by 45 degree rail

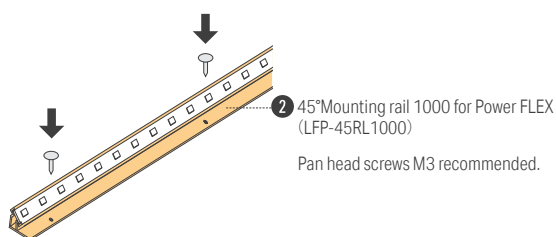

Cove lighting



Cornice lighting



For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m


Curved installation



Minimum bending radius




Cutting of lamp fitting

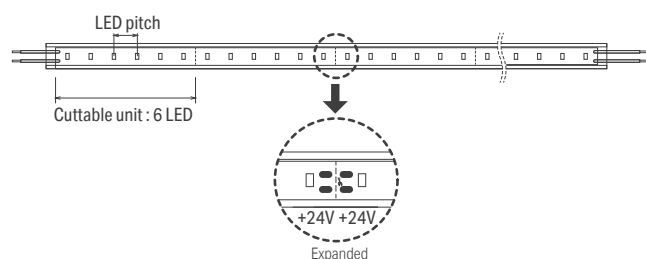

The cutable unit of Luci Power FLEX EX is 6 LEDs.

Cutting the LED fixture at the wrong point may cause failure or a non-lit. End caps are required to seal the open end of the LED fixture after cutting. Acrylic adhesive is recommended. Do not solder cables to the circuit board of the cut LED fixture.

System configuration diagram

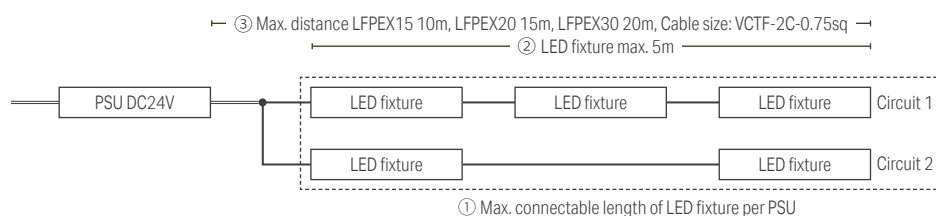

- Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci Power FLEX EX Indoor -Custom order-

Model No.

LFPEX

-

T

-

-

CL

-


I

-


LED Pitch	Length	Lead Wire	Light source color	Tube type	Environment	Wattage
<div>15 15mm Pitch</div> <div>20 20mm Pitch</div> <div>30 30mm Pitch</div>	Refer to "Custom order products size"	<div>W Both ends lead wire</div> <div>S One end lead wire</div>	<div>N Natural white 5300K</div> <div>W White 4200K</div> <div>WW Warm white 3500K 3500K</div> <div>L30 Warm white 3000K 3000K</div> <div>L27 Warm white 2700K 2700K</div> <div>L24 Warm white 2400K 2400K</div> <div>L21 Warm white 2100K 2100K</div> <div>L19 Warm white 1900K 1900K</div>	<div>CL Clear</div>	<div>I Indoor</div>	only for LFPEX30 <div>9 9.5W</div> <div>6 6.5W</div> <div>4 4.5W</div>

External dimension

Luci Power FLEX EX Indoor / **W** Both ends lead wire

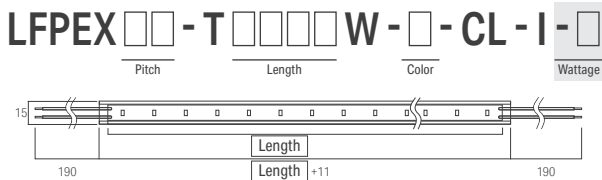

Luci Power FLEX EX Indoor / **S** One end lead wire

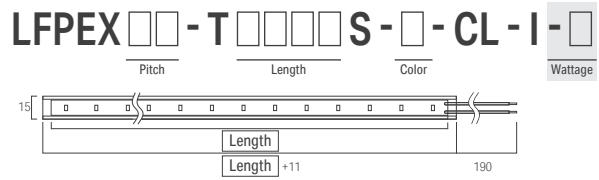

- The lead wires are delivered without connectors. Contact us if indoor connectors are needed.

Custom order products size

Luci Power FLEX EX 15mm pitch (18.2 W/m)				
Corresponds to Length of Model No. and External dimensions				
0083	1082	2080	3078	4077
0166	1165	2163	3162	4160
0250	1248	2246	3245	4243
0333	1331	2330	3328	4326
0416	1414	2413	3411	4410
0499	1498	2496	3494	4493
0582	1581	2579	3578	4576
0666	1664	2662	3661	4659
0749	1747	2746	3744	4742
0832	1830	2829	3827	4826
0915	1914	2912	3910	4909
1000	2000	3000	4000	5000

Luci Power FLEX EX 20mm pitch (12.1 W/m)				
Corresponds to Length of Model No. and External dimensions				
0125	1123	2122	3120	4118
0250	1248	2246	3245	4243
0374	1373	2371	3370	4368
0499	1498	2496	3494	4493
0624	1622	2621	3619	4618
0749	1747	2746	3744	4742
0874	1872	2870	3869	4867
1000	2000	3000	4000	5000

Luci Power FLEX EX 30mm pitch (9.5 W/m, 6.5 W/m, 4.5W/m)				
Corresponds to Length of Model No. and External dimensions				
0166	1165	2163	3162	4160
0333	1331	2330	3328	4326
0499	1498	2496	3494	4493
0666	1664	2662	3661	4659
0832	1830	2829	3827	4826
1000	2000	3000	4000	5000



LFPEX15 Luci Power FLEX EX 15mm pitch


Color temperature

5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

Direct horizontal surface light intensity distribution chart


LFPEX15-T1000W-N-CL-I

Light source color 5300K
Brightness 600 cd
Luminous flux 1692 lm
Color rendering index Ra 92




LFPEX15-T1000W-W-CL-I

Light source color 4200K
Brightness 596 cd
Luminous flux 1680 lm
Color rendering index Ra 93




LFPEX15-T1000W-WW-CL-I

Light source color 3500K
Brightness 575 cd
Luminous flux 1620 lm
Color rendering index Ra 93




LFPEX15-T1000W-L30-CL-I

Light source color 3000K
Brightness 530 cd
Luminous flux 1493 lm
Color rendering index Ra 94




LFPEX15-T1000W-L27-CL-I

Light source color 2700K
Brightness 531 cd
Luminous flux 1496 lm
Color rendering index Ra 93




LFPEX15-T1000W-L24-CL-I

Light source color 2400K
Brightness 447 cd
Luminous flux 1260 lm
Color rendering index Ra 93




LFPEX15-T1000W-L21-CL-I

Light source color 2100K
Brightness 390 cd
Luminous flux 1100 lm
Color rendering index Ra 93



LFPEX15-T1000W-L19-CL-I


Light source color 1900K
Brightness 498 cd
Luminous flux 1405 lm
Color rendering index Ra 63




Recommend dimensions and illumination distributions

@2700K


Cornice lighting-1 CH=2800

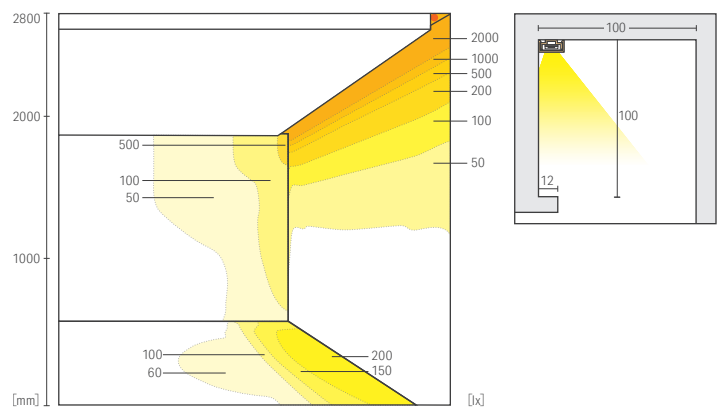

Cornice lighting-2 CH=2800

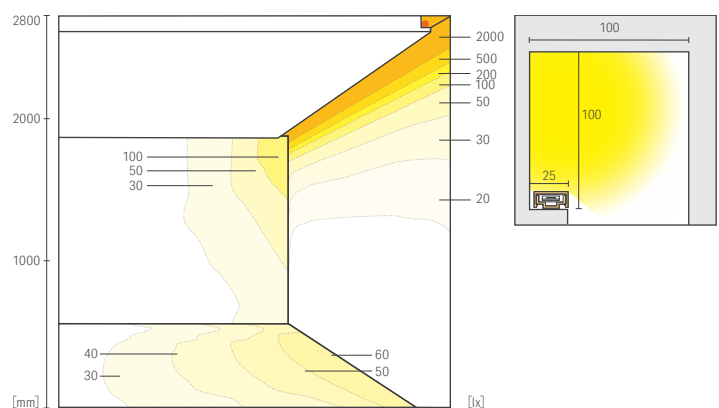

Cove lighting CH=2800

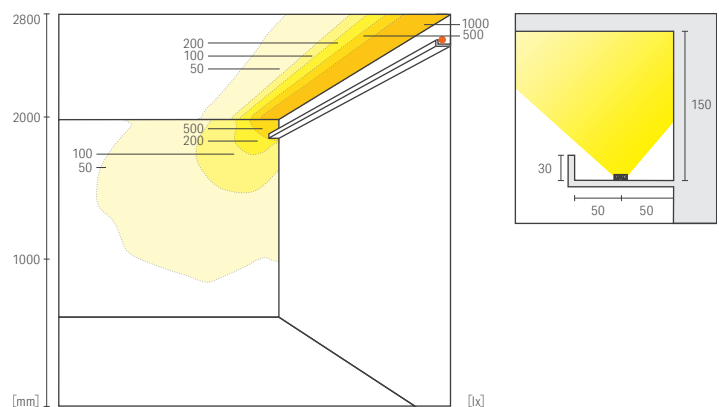

Illuminance data



LFPEX20 Luci Power FLEX EX 20mm pitch


Color temperature

5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

Direct horizontal surface light intensity distribution chart


LFPEX20-T1000W-W-CL-I

Light source color 5300K
Brightness 406 cd
Luminous flux 1150 lm
Color rendering index Ra 93




LFPEX20-T1000W-W-CL-I

Light source color 4200K
Brightness 398 cd
Luminous flux 1125 lm
Color rendering index Ra 93




LFPEX20-T1000W-WW-CL-I

Light source color 3500K
Brightness 390 cd
Luminous flux 1101 lm
Color rendering index Ra 93




LFPEX20-T1000W-L30-CL-I

Light source color 3000K
Brightness 357 cd
Luminous flux 1008 lm
Color rendering index Ra 94




LFPEX20-T1000W-L27-CL-I

Light source color 2700K
Brightness 360 cd
Luminous flux 1016 lm
Color rendering index Ra 92




LFPEX20-T1000W-L24-CL-I

Light source color 2400K
Brightness 398 cd
Luminous flux 856 lm
Color rendering index Ra 93




LFPEX20-T1000W-L21-CL-I

Light source color 2100K
Brightness 264 cd
Luminous flux 748 lm
Color rendering index Ra 96



LFPEX20-T1000W-L19-CL-I


Light source color 1900K
Brightness 337 cd
Luminous flux 955 lm
Color rendering index Ra 63




Recommend dimensions and illumination distributions

@2700K


Cornice lighting-1 CH=2800

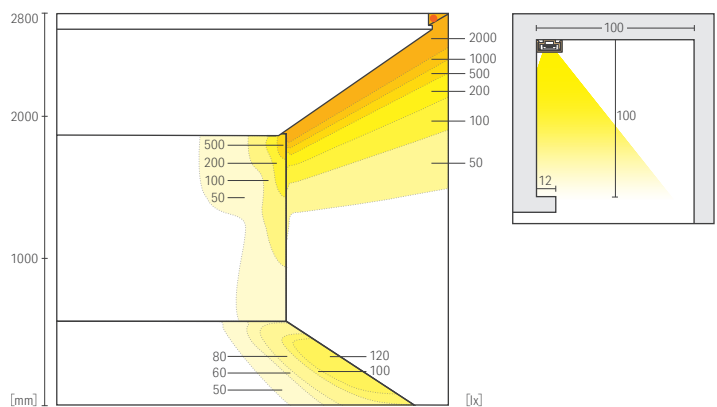

Cornice lighting-2 CH=2800

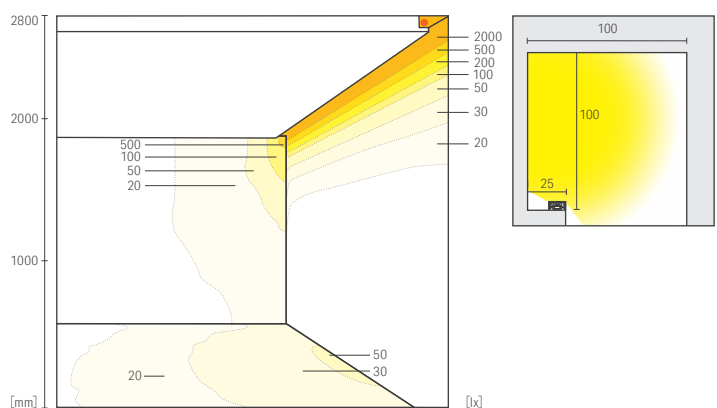

Cove lighting CH=2800

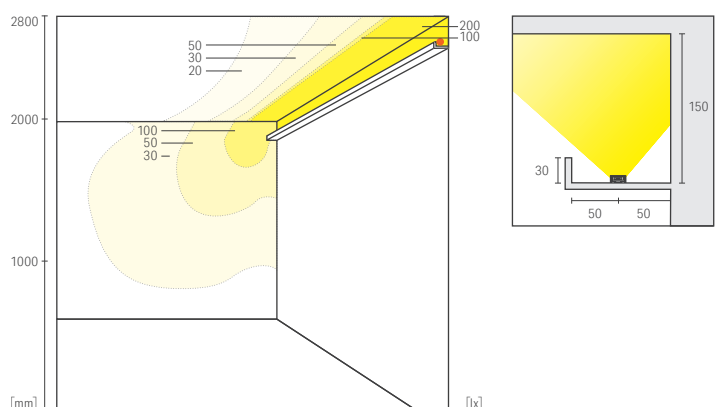

LFPEX

UQ FLEX / UQ FLEX α

Power FLEX EX

Power FLEX Spect C

Power FLEX

Power FLEXTHOF

Flat FLEX F

Power FLEX α

FLEX α F



LFPEX30 Luci Power FLEX EX 30mm pitch

Color temperature


5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

9.5W

Direct horizontal surface light intensity distribution chart


LFPEX30-T1000W-N-CL-I-9

Light source color 5300K
Brightness 303 cd
Luminous flux 847 lm
Color rendering index Ra 92




LFPEX30-T1000W-W-CL-I-9

Light source color 4200K
Brightness 290 cd
Luminous flux 812 lm
Color rendering index Ra 93




LFPEX30-T1000W-WW-CL-I-9

Light source color 3500K
Brightness 252 cd
Luminous flux 704 lm
Color rendering index Ra 93




LFPEX30-T1000W-L30-CL-I-9

Light source color 3000K
Brightness 230 cd
Luminous flux 644 lm
Color rendering index Ra 94




LFPEX30-T1000W-L27-CL-I-9

Light source color 2700K
Brightness 230 cd
Luminous flux 643 lm
Color rendering index Ra 92




LFPEX30-T1000W-L24-CL-I-9

Light source color 2400K
Brightness 211 cd
Luminous flux 592 lm
Color rendering index Ra 93




LFPEX30-T1000W-L21-CL-I-9

Light source color 2100K
Brightness 196 cd
Luminous flux 550 lm
Color rendering index Ra 96



LFPEX30-T1000W-L19-CL-I-9

Light source color 1900K
Brightness 251 cd
Luminous flux 703 lm
Color rendering index Ra 63




6.5W

Direct horizontal surface light intensity distribution chart


LFPEX30-T1000W-N-CL-I-6

Light source color 5300K
Brightness 191 cd
Luminous flux 536 lm
Color rendering index Ra 92




LFPEX30-T1000W-W-CL-I-6

Light source color 4200K
Brightness 183 cd
Luminous flux 514 lm
Color rendering index Ra 93




LFPEX30-T1000W-WW-CL-I-6

Light source color 3500K
Brightness 158 cd
Luminous flux 446 lm
Color rendering index Ra 93




LFPEX30-T1000W-L30-CL-I-6

Light source color 3000K
Brightness 145 cd
Luminous flux 408 lm
Color rendering index Ra 94




LFPEX30-T1000W-L27-CL-I-6

Light source color 2700K
Brightness 145 cd
Luminous flux 407 lm
Color rendering index Ra 92




LFPEX30-T1000W-L24-CL-I-6

Light source color 2400K
Brightness 133 cd
Luminous flux 375 lm
Color rendering index Ra 93




LFPEX30-T1000W-L21-CL-I-6

Light source color 2100K
Brightness 124 cd
Luminous flux 348 lm
Color rendering index Ra 96



LFPEX30-T1000W-L19-CL-I-6

Light source color 1900K
Brightness 158 cd
Luminous flux 445 lm
Color rendering index Ra 63



Illuminance data



LFPEX30

Luci Power FLEX EX 30mm pitch

Color temperature


5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

4.5W

Direct horizontal surface light intensity distribution chart


LFPEX30-T1000W-N-CL-I-4

Light source color 5300K
Brightness 144 cd
Luminous flux 405 lm
Color rendering index Ra 92




LFPEX30-T1000W-W-CL-I-4

Light source color 4200K
Brightness 138 cd
Luminous flux 388 lm
Color rendering index Ra 93




LFPEX30-T1000W-WW-CL-I-4

Light source color 3500K
Brightness 120 cd
Luminous flux 337 lm
Color rendering index Ra 93




LFPEX30-T1000W-L30-CL-I-4

Light source color 3000K
Brightness 109 cd
Luminous flux 308 lm
Color rendering index Ra 94




LFPEX30-T1000W-L27-CL-I-4

Light source color 2700K
Brightness 109 cd
Luminous flux 307 lm
Color rendering index Ra 92




LFPEX30-T1000W-L24-CL-I-4

Light source color 2400K
Brightness 100 cd
Luminous flux 283 lm
Color rendering index Ra 93




LFPEX30-T1000W-L21-CL-I-4

Light source color 2100K
Brightness 93 cd
Luminous flux 263 lm
Color rendering index Ra 96



LFPEX30-T1000W-L19-CL-I-4

Light source color 1900K
Brightness 119 cd
Luminous flux 336 lm
Color rendering index Ra 63



LFPSC

ここにテキストを入力



Cosmetic company office
Architect office: tashiromasafumiDESIGNROOM
Construction: CBK CO., LTD.
Photo: Satoshi Shigeta




Luci Power FLEX Spect C

Flexible strip light with high color rendering >Ra 96, ideal for backlit lighting with an artificial sunlight effect, light for shelves in retail shops, and inspection lighting of printing, cosmetics and textile, etc.

Specifications

Dimensions

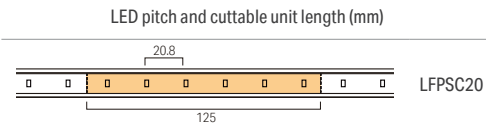


Cross section : W 15 x H 4.5 mm
Standard length : 1010 mm with both ends open end wire

Electrical & Output

Model	LFPSC20
Power Consumption (W/m)	14.2
Luminous flux @ 5000K (lm/m)	869

Color temperature




Min Bending radius

R 50mm in top (vertical) bend direction




Accessories

Mounting rail 1000 for Power FLEX



45° Mounting rail 1000 for Power FLEX



Easy to cut these rails at site as it's made by AES material


Features

Differences in vision of colors



Value of Ra96

The reproducibility of colors on illuminated objects by a light source is called "color rendering property". The benchmark of light source for color rendering property is sunlight, whose Ra ("average of color Rendering index") is defined as 100. That means color rendering property level is higher if Ra value is closer to 100. Luci Power FLEX SpectC maintains Ra96 in "average of Rendering index" (R1 to R8), while it also achieves high property value in "special color rendering index".

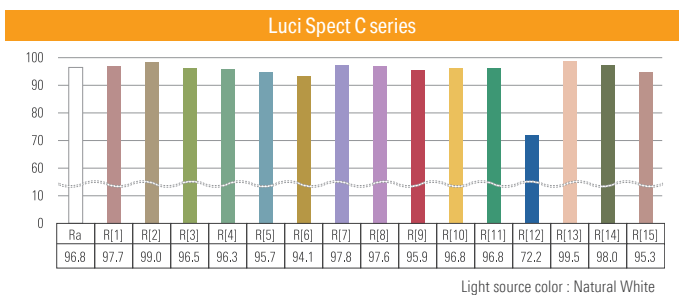

Discontinued

Luci Power FLEX Spect C

LFPSC

Ra96

ISO 23603

Color evaluation

Color management

ANSI BIN

CE

3 years warranty

- Flexible strip with bending sideways suitable for curved light trough

- Cutable every 2 LEDs (40mm)

- Accessory for straight/curved installation






Model No.				
LFPSC20 - 1000 - <div></div> - CL - I				
Product Name / LED pitch	Length	Light source color	Tube type	Environment
LFPSC20 : 20mm pitch	1000	D : Daylight white N : Natural white	CL : Clear	I : Indoor


Specification	
Model No.	LFPSC20-1000- <div></div> -CL-I
Power consumption	14.2W/m
Fitting length(L)	1011mm
Weight	60g
Cutable unit	125mm (6 LED)
Light source color	* = Please contact us since it is made-to-order products and has MOQ
D 6500K	Ra 97
N 5000K	Ra 97

General Specification	
Input voltage	DC24V
LED beam angle	120°
Environment	Indoors (no condensation)
Max. length per circuit	5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachments	⑥ End cap 2pcs
Option parts	① ② ③ Mounting rail ④ ⑤ Mounting clip ⑥ End cap ⑦ Magnet
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required








Max. connectable length per power supply	
Length of LED fixture (70% loading factor)	Power supply
During dimmer use *: split into multiple circuits	
~1.4m	50W power supply
~3.6m	100W power supply
~7.3m*	150W power supply

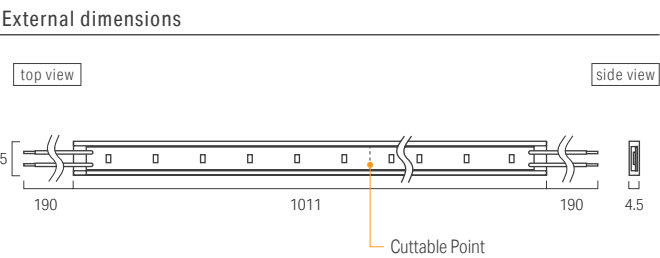

Cross sectional view when installing optional items

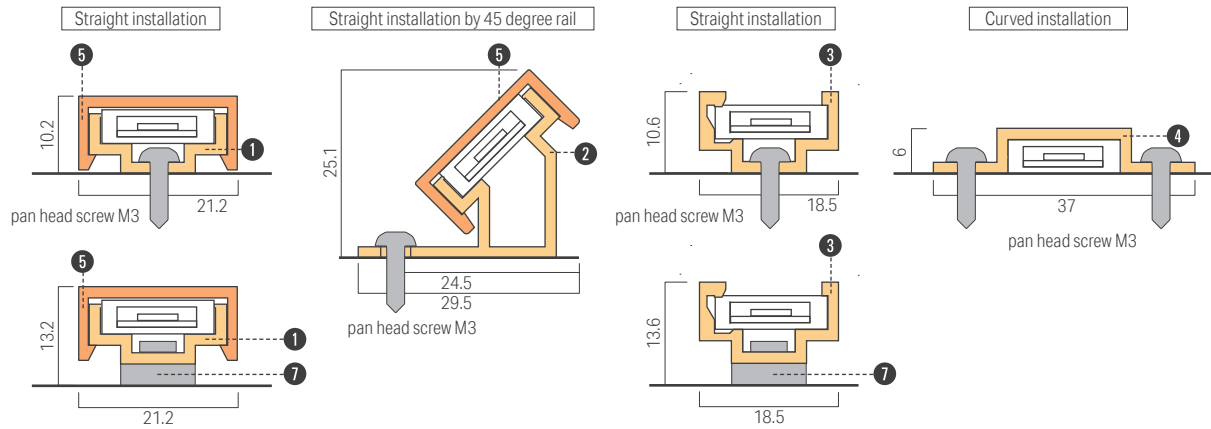

Option parts

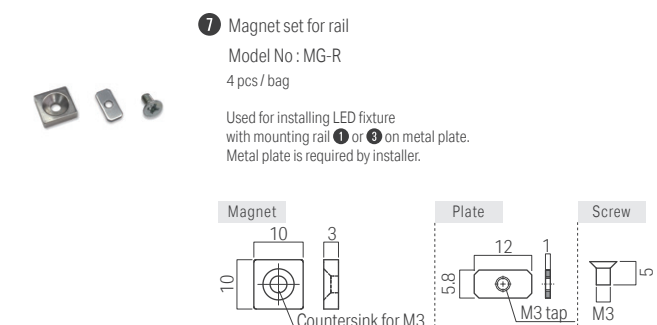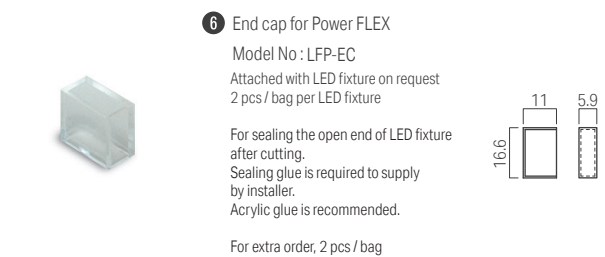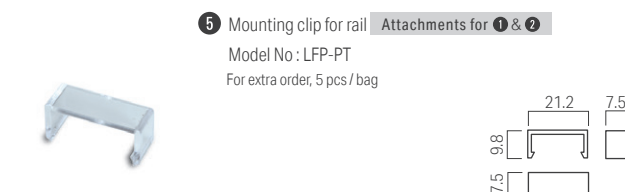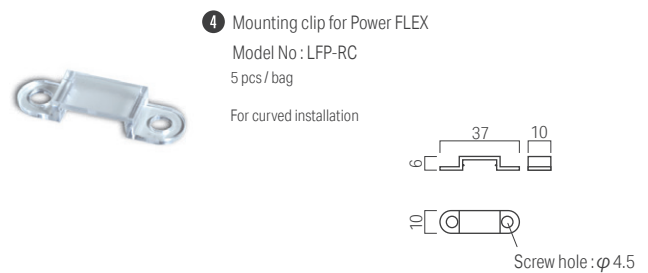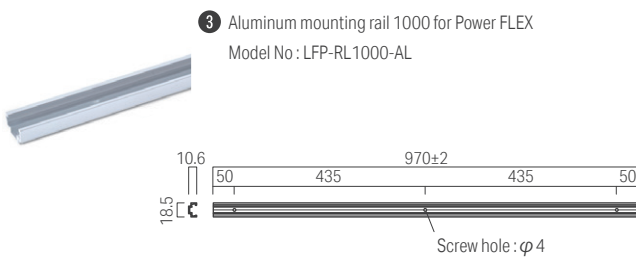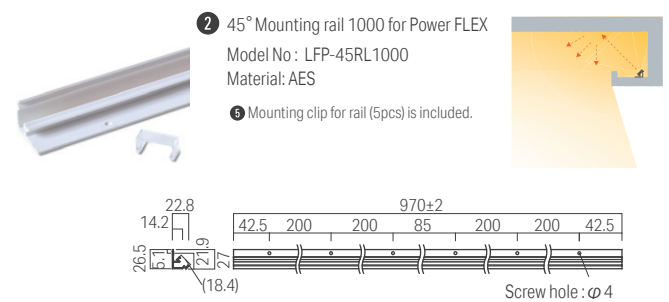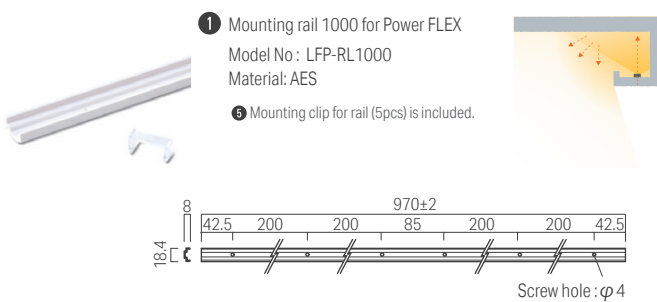

LFP



Ritz Carlton Langkawi
Location: Malaysia
Architect office: Light moment
Photo: Zoom



Raikouji
Location: Japan
Architect office: Atelier Sotaro Yamamoto

Lighting Design: Nakajima Tatsuaki Lighting Design Laboratory Inc.
Construction: SATOHIDE CORPORATION
Photo: Shigeo Ogawa Studio



Luci Power FLEX


Luci's long-selling strip light best use for concealed light, furniture and ceiling cove

Short unit lengths for delicate designs, with easy custom length order and on-site adjustment

Specifications

Dimensions

LED pitch and cuttable unit length (mm)

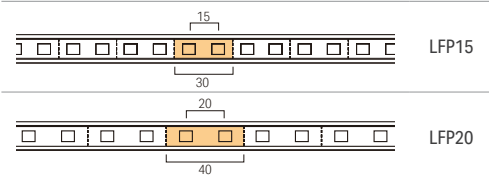

Cross section W 15 x H 4.5 mm

Standard length 1m with both ends open end wire


Custom order up to 4.5m in LFP15 and 5m in LFP20 length at every the unit length with both ends or one end feed cable.

Cuttable luminaire at site at scissor mark. If a luminaire with a both side feed cable is cut, the left and right sides of the luminaire can be used separately, as if the luminaire were one side feed.

Electrical & Output

Model	LFP15	LFP20
Power Consumption (W/m)	15.4	10.5
Luminous flux @ 3000K (lm/m)	789	510

Color temperature




Min Bending radius

R 50mm in top (vertical) bend direction



Accessories

Mounting rail 1000 for Power FLEX



45° Mounting rail 1000 for Power FLEX




Easy to cut these rails at site as it's made by AES material

Soft acrylic tube

- Higher protection performance than bare LED strip against unexpected static electricity, external force and environmental factors which may cause damage to the circuit board and components.

- Long-lasting characteristics are maintained against deformation, discolouration, and deterioration certify by sunshine weather-resistant tests applied in the automotive industry.

Project reference

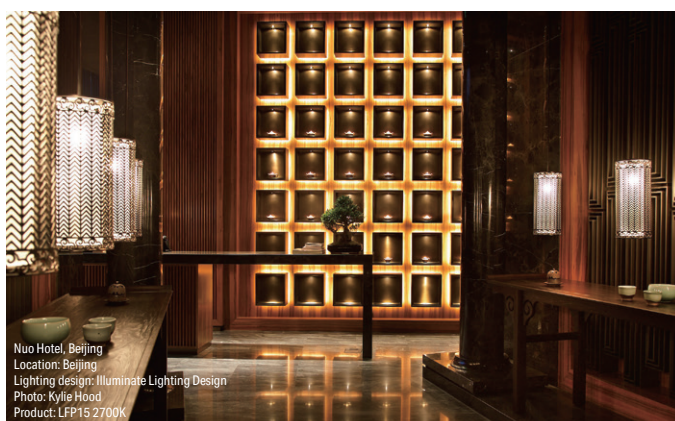

LFP




- Model No.









1

Light Intensity Refer to P.66

Cross sectional view when installing optional items

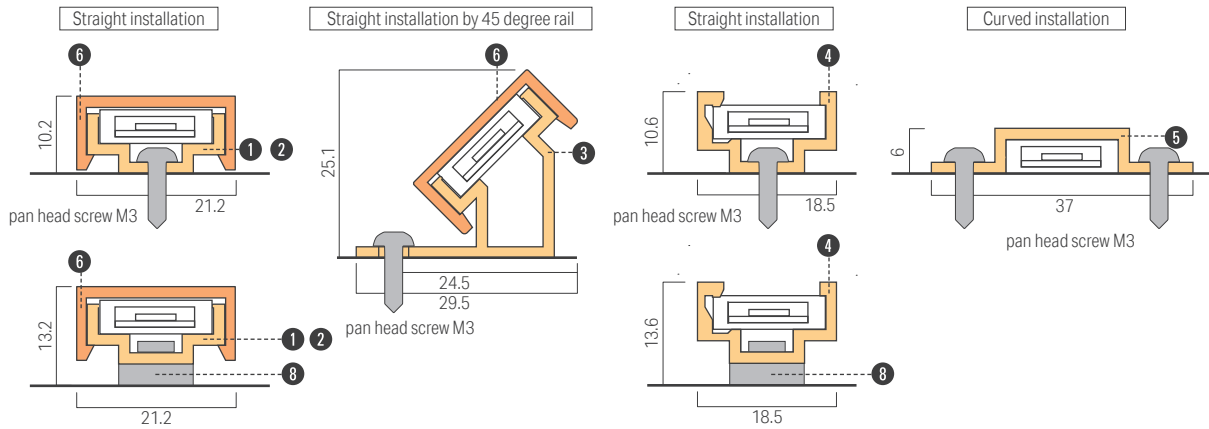


Option parts

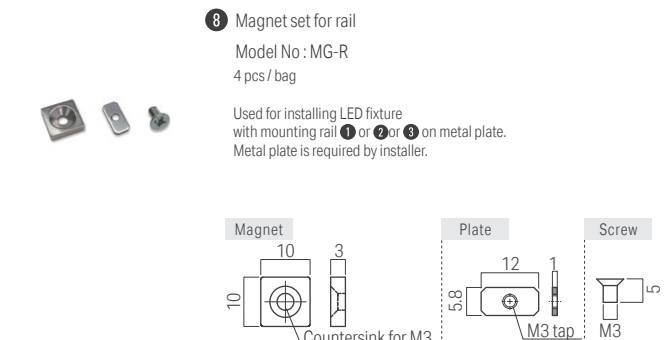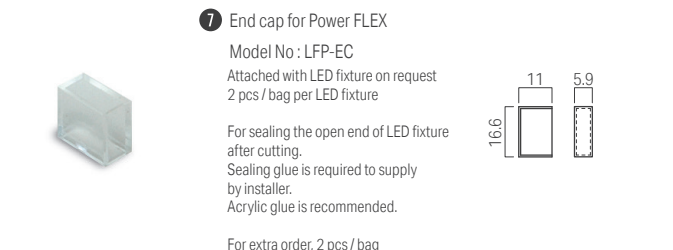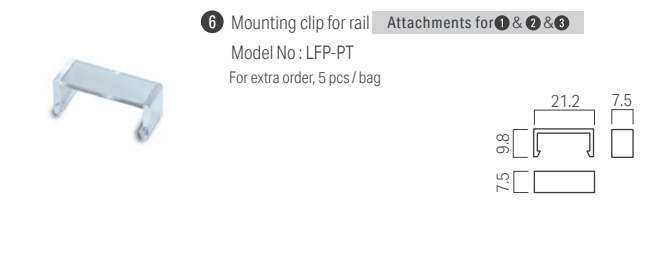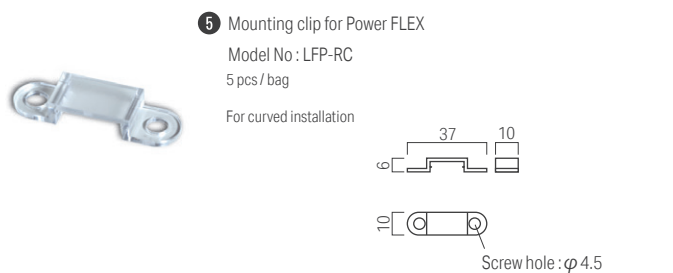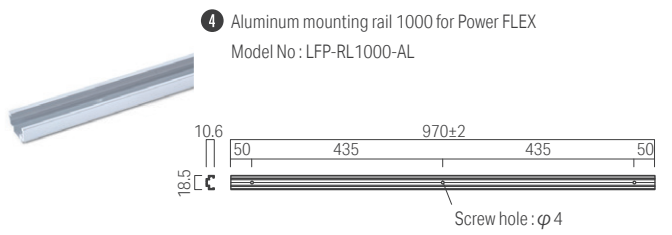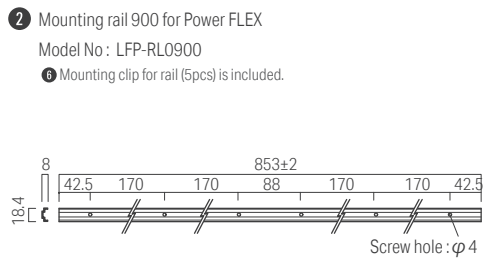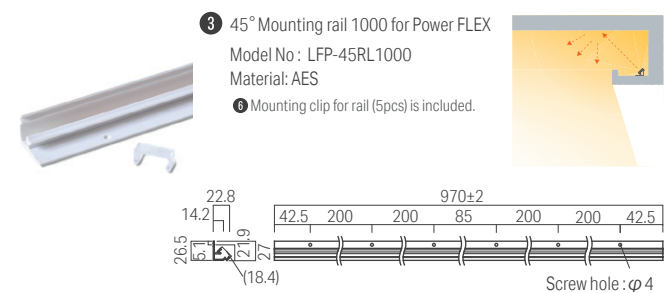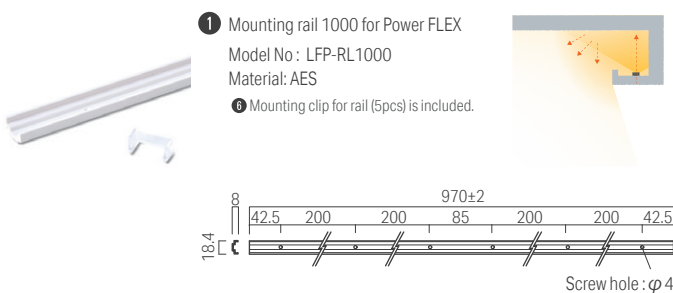

Luci Power FLEX


Installing the product

Straight installation

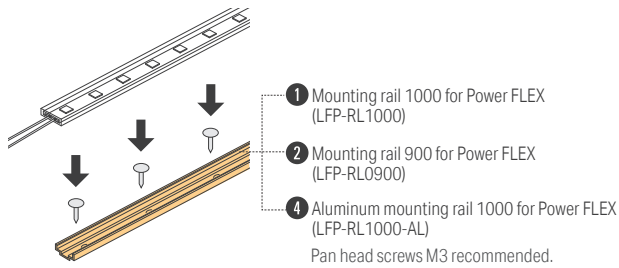


Magnet Installation


Mounting rail 1000 for Power FLEX

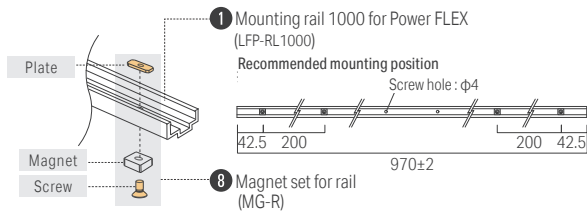

Cove lighting




Cornice lighting




For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m
* In case of Aluminum mounting rail 1000 for Power FLEX, Mounting clip for rail is not necessary.


Aluminum mounting rail 1000 for Power FLEX

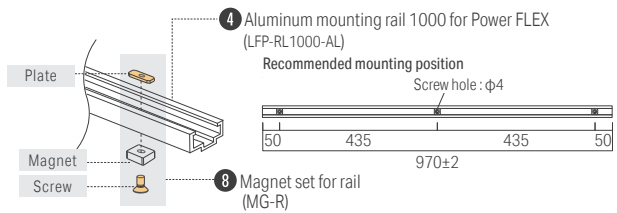


Straight installation by 45 degree rail

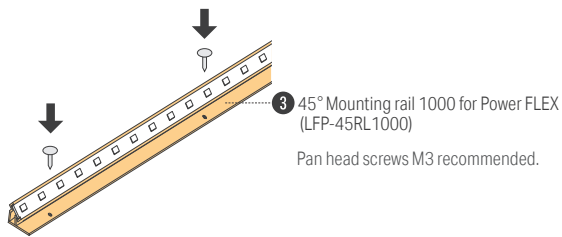

Cove lighting



Cornice lighting




For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m


Curved installation



Minimum bending radius




Cutting of lamp fitting

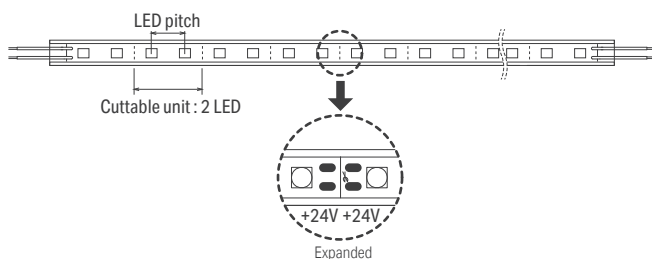

The cuttable unit of Luci Power FLEX is 2 LEDs.

Cutting the LED fixture at the wrong point may cause failure or a non-lit. End caps are required to seal the open end of the LED fixture after cutting. Acrylic adhesive is recommended. Do not solder cables to the circuit board of the cut LED fixture.

System configuration diagram

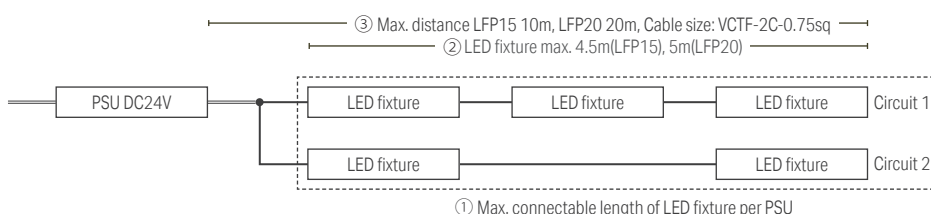

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci Power FLEX Indoor -Custom order-

Model No.

LFP - **T** - - - - **I**

LED Pitch	Length	Lead Wire	Light source color	Tube type	Environment
15 15mm Pitch 20 20mm Pitch	Refer to "Custom order products size"	W Both ends lead wire S One end lead wire	D Daylight white 7100K N Natural white 5300K W White 4200K WW Warm white 3500K 3500K L30 Warm white 3000K 3000K L27 Warm white 2700K 2700K L24 Warm white 2400K 2400K L19 Warm white 1900K 1900K B Blue Blue	CL Clear DF Diffuser	I Indoor

External dimension


Luci Power FLEX Indoor / **W** Both ends lead wire

LFP - **T** **W** - - - **I**



Luci Power FLEX Indoor / **S** One end lead wire

LFP - **T** **S** - - - **I**

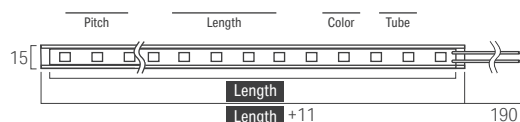

- The lead wires are delivered without connectors. Contact us if indoor connectors are needed.

Custom order products size

Luci Power FLEX 15mm pitch (15.4 W/m)					
Corresponds to Length of Model No. and External dimensions					
0030	0930	1830	2730	3630	
0060	0960	1860	2760	3660	
0090	0990	1890	2790	3690	
0120	1020	1920	2820	3720	
0150	1050	1950	2850	3750	
0180	1080	1980	2880	3780	
0210	1110	2010	2910	3810	
0240	1140	2040	2940	3840	
0270	1170	2070	2970	3870	
0300	1200	2100	3000	3900	
0330	1230	2130	3030	3930	
0360	1260	2160	3060	3960	
0390	1290	2190	3090	3990	
0420	1320	2220	3120	4020	
0450	1350	2250	3150	4050	
0480	1380	2280	3180	4080	
0510	1410	2310	3210	4110	
0540	1440	2340	3240	4140	
0570	1470	2370	3270	4170	
0600	1500	2400	3300	4200	
0630	1530	2430	3330	4230	
0660	1560	2460	3360	4260	
0690	1590	2490	3390	4290	
0720	1620	2520	3420	4320	
0750	1650	2550	3450	4350	
0780	1680	2580	3480	4380	
0810	1710	2610	3510	4410	
0840	1740	2640	3540	4440	
0870	1770	2670	3570	4470	
0900	1800	2700	3600	4500	

Luci Power FLEX 20mm pitch (10.5 W/m)					
Corresponds to Length of Model No. and External dimensions					
0040	1040	2040	3040	4040	
0080	1080	2080	3080	4080	
0120	1120	2120	3120	4120	
0160	1160	2160	3160	4160	
0200	1200	2200	3200	4200	
0240	1240	2240	3240	4240	
0280	1280	2280	3280	4280	
0320	1320	2320	3320	4320	
0360	1360	2360	3360	4360	
0400	1400	2400	3400	4400	
0440	1440	2440	3440	4440	
0480	1480	2480	3480	4480	
0520	1520	2520	3520	4520	
0560	1560	2560	3560	4560	
0600	1600	2600	3600	4600	
0640	1640	2640	3640	4640	
0680	1680	2680	3680	4680	
0720	1720	2720	3720	4720	
0760	1760	2760	3760	4760	
0800	1800	2800	3800	4800	
0840	1840	2840	3840	4840	
0880	1880	2880	3880	4880	
0920	1920	2920	3920	4920	
0960	1960	2960	3960	4960	
1000	2000	3000	4000	5000	


Color temperature of diffuser tube type

Nominal light source color temperature		Color temperature through diffuser tube *1
D	7100 K	4300 K
N	5300 K	3800 K
W	4200 K	3300 K
WW	3500 K	2800 K
L30	3000 K	2500 K
L27	2700 K	2200 K
L24	2400 K	1900 K


*1:

The optical data provided above is for reference only. Due to the tolerances of the production process, values for color temperature can vary $\pm 10\%$. The lumen output value of the diffuser tube type is 20~30% less than the clear tube type.

In addition, non-uniform color among each package may be more pronounced when using the diffuser tube.

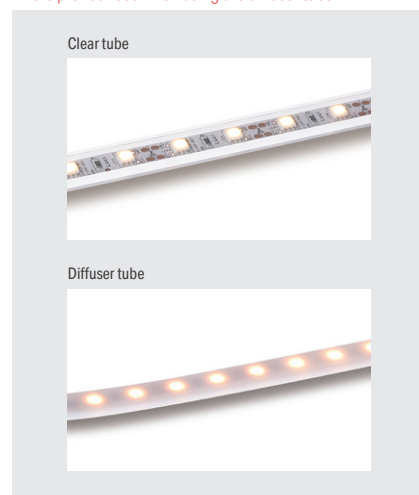

Illuminance data



LFP15

Luci Power FLEX 15mm pitch


Color temperature

7100K 5300K 4200K 3500K 3000K 2700K 2400K 1900K Blue

Direct horizontal surface light intensity distribution chart


LFP15-T0900W-W-CL-I

Light source color 4200K
Brightness 295 cd
Luminous flux 818 lm
Color rendering index Ra 90




LFP15-T0900W-WW-CL-I

Light source color 3500K
Brightness 280 cd
Luminous flux 774 lm
Color rendering index Ra 90




LFP15-T0900W-L30-CL-I

Light source color 3000K
Brightness 260 cd
Luminous flux 710 lm
Color rendering index Ra 90




LFP15-T0900W-L27-CL-I

Light source color 2700K
Brightness 260 cd
Luminous flux 711 lm
Color rendering index Ra 90



LFP15-T0900W-L24-CL-I


Light source color 2400K
Brightness 218 cd
Luminous flux 608 lm
Color rendering index Ra 90




Recommend dimensions and illumination distributions

@2700K


Cornice lighting-1 CH=2800

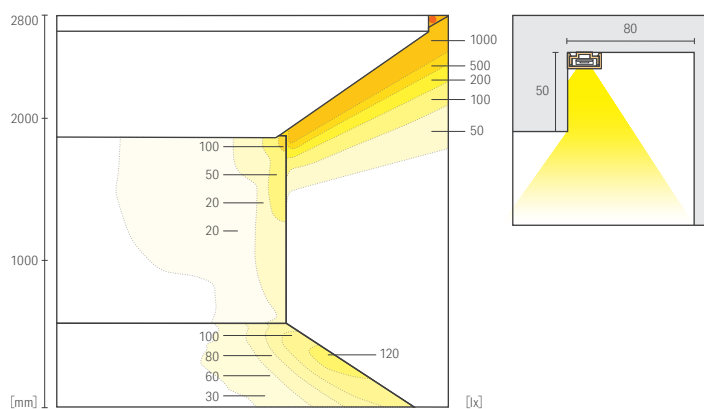

Cornice lighting-2 CH=2800

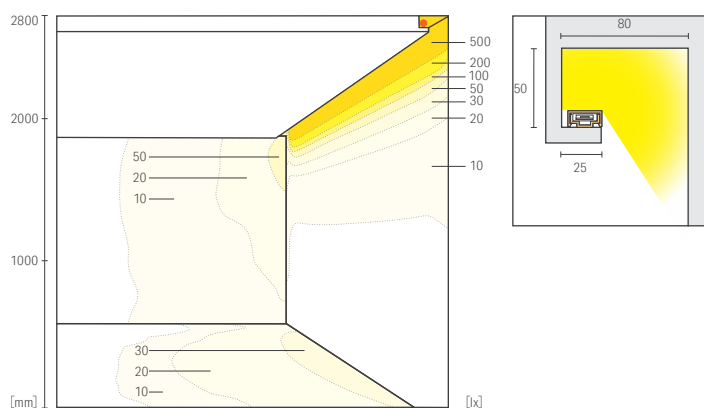

Cove lighting CH=2800

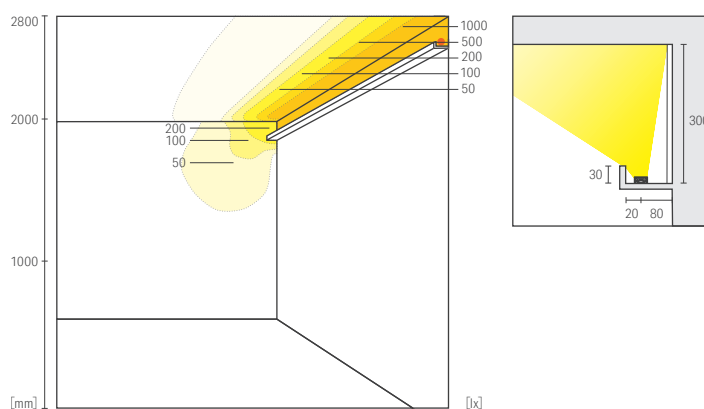

Illuminance data



LFP20 Luci Power FLEX 20mm pitch


Color temperature

7100K 5300K 4200K 3500K 3000K 2700K 2400K 1900K Blue

Direct horizontal surface light intensity distribution chart


LFP20-T1000W-W-CL-I

Light source color 4200K
Brightness 238 cd
Luminous flux 667 lm
Color rendering index Ra 90




LFP20-T1000W-WW-CL-I

Light source color 3500K
Brightness 228 cd
Luminous flux 639 lm
Color rendering index Ra 90




LFP20-T1000W-L30-CL-I

Light source color 3000K
Brightness 207 cd
Luminous flux 579 lm
Color rendering index Ra 90




LFP20-T1000W-L27-CL-I

Light source color 2700K
Brightness 201 cd
Luminous flux 563 lm
Color rendering index Ra 90



LFP20-T1000W-L24-CL-I


Light source color 2400K
Brightness 164 cd
Luminous flux 459 lm
Color rendering index Ra 90




Recommend dimensions and illumination distributions

@2700K


Cornice lighting-1 CH=2800

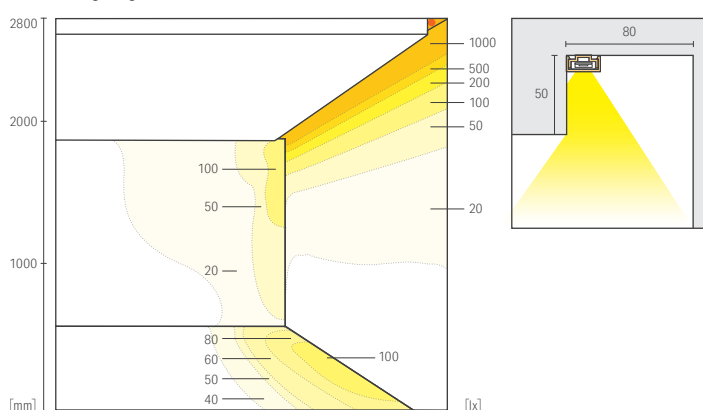

Cornice lighting-2 CH=2800

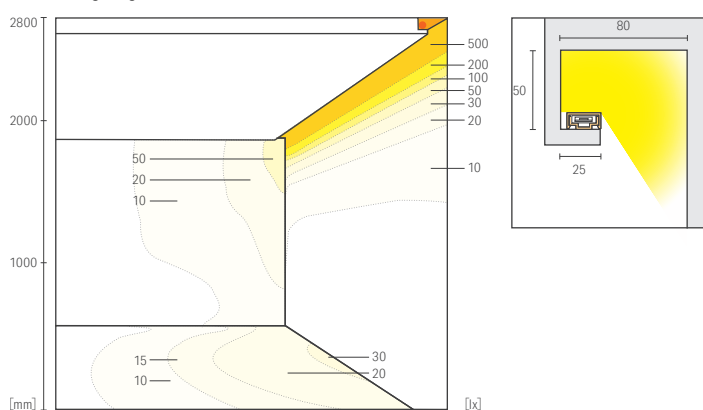

Cove lighting CH=2800

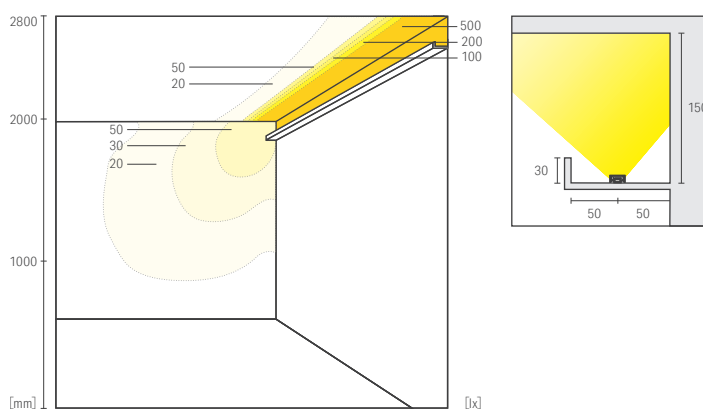

LFP

UQ FLEX / UQ FLEX α

Power FLEX EX

Power FLEX Spect C

Power FLEX

Power FLEX THOF

Flat FLEX F

Power FLEX α

FLEX α F

LFPTH RENEWAL



En WEDDING chapel
Location: Japan
Architect office: lab.co.ltd
Construction: GF.inc
Photograph from: Queserser & Company



Ito-Yokado Abeno
Location: Japan
Architect office: Yoshichu-Mannequin GRID
Construction: Yoshichu-Mannequin
Lighting Design: Luminous




Luci Power FLEX THOF

Tunable white strip light with two CCT LEDs alternating at narrow pitch ideal for concealed or backlight

Free choice of two different CCTs efficiently emphasizing, design intent, ambiance, and circadian lighting.

Specifications

Dimensions

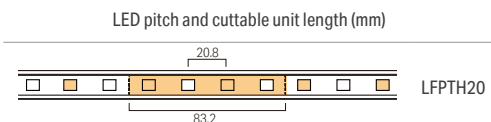

Cross section W 15 x H 4.5 mm

Standard length 1m with both ends open end wire


Custom order up to 5m lengths at every unit length with both ends or one end feed cable

Cuttable luminaire at site at scissor mark. If a luminaire with a both side feed cable is cut, the left and right sides of the luminaire can be used separately, as if the luminaire were one side feed.

Electrical & Output

Model	LFPTH20
Power Consumption (W/m)	11
Luminous flux (lm/m)	660 @ 5300K 100% 2700K 100%

Color temperature


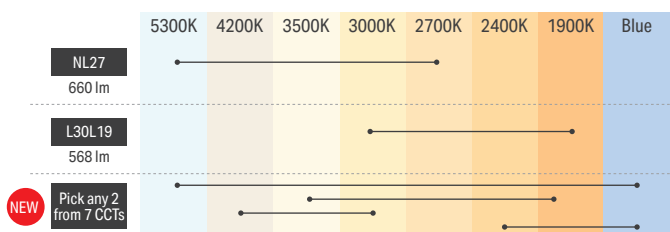


Min Bending radius


R 50mm in top (vertical) bend direction



TIPS - Recommended distance

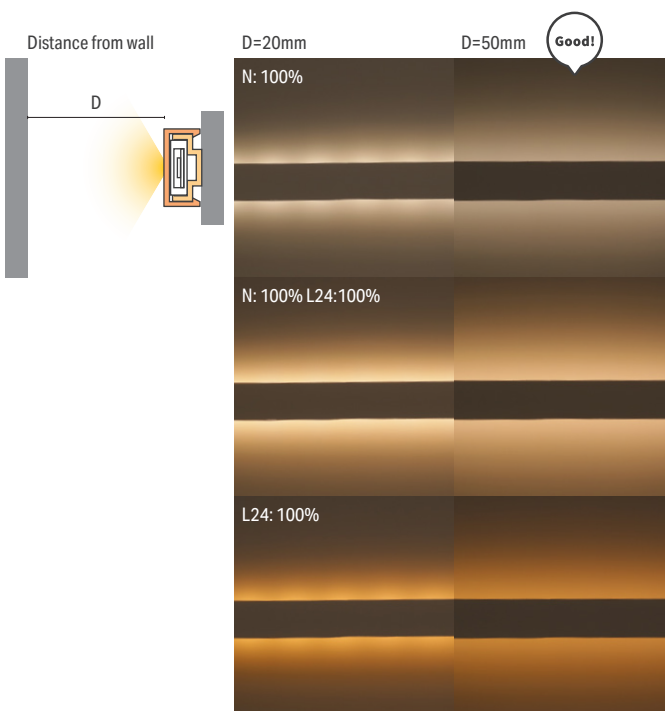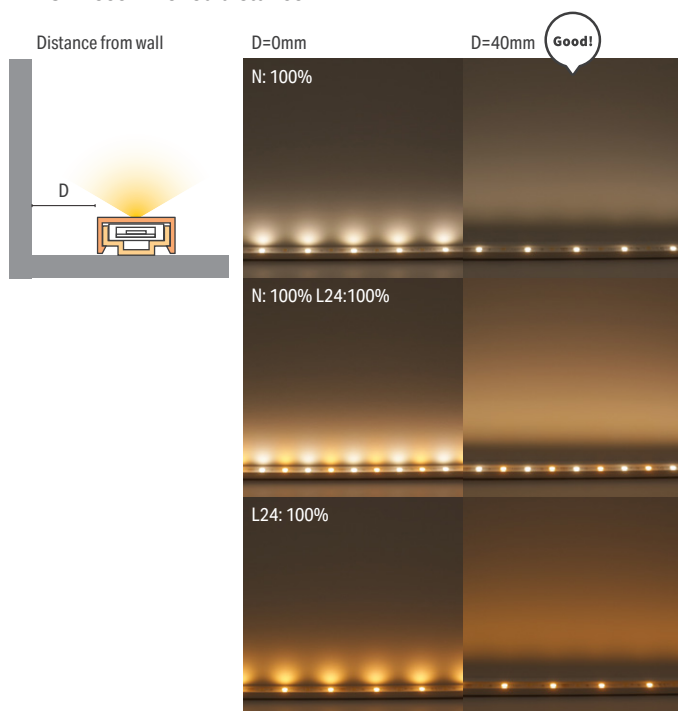

Project reference

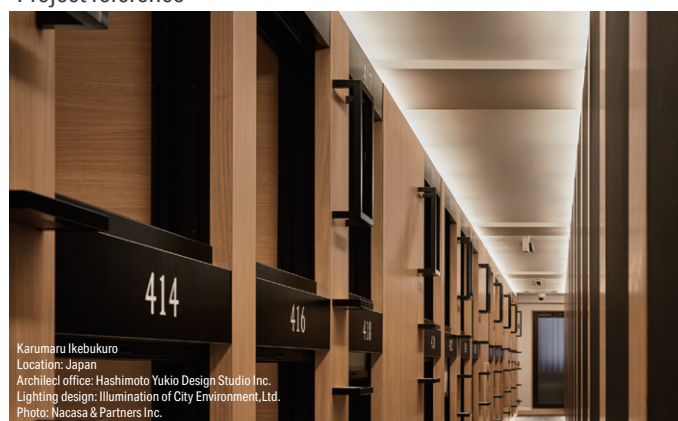

LFPPTH

RENEWAL

Color management
ANSI BIN



3 years
warranty

- For Dynamic white or Dim-to-Warm application
- Arranging 2 colors of LED package alternately
- Free to select 2 CCTs from 7 CCTs



Model No.

LFPPTH20

- T -

-

CL -

I

Product Name / LED pitch	Length / Lead wire	Light source color	Tube type	Environment
LFPPTH20 : 20mm pitch	Custom order length	Higher CCT Lower CCT Select 2 CCTs N : 5300K W : 4200K WW : 3500K L30 : 3000K L27 : 2700K L24 : 2400K L21 : 2100K L19 : 1900K B : Blue	CL : Clear	I : Indoor
	W : Both ends S : One ends			

Specification

LED pitch	20mm pitch
Model No.	LFPPTH20-T <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> -CL-I
Power consumption	11W/m (Max)
Fitting length(L)	1011mm
Weight	55g
Cuttable unit	83.2mm (4 LED)
Luminaire efficacy (N 100%, L27 100%)	76.4 lm/W
Light source color	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.
NL27	○
L30L19	*
Dimming rate	
NL27 5300K~2700K	N 100%, L27 0% Ra89 ○ 360lm N 100%, L27 100% Ra90 ○ 660lm N 0%, L27 100% Ra86 ○ 326lm
L30L19 3000K~1900K	L30 100%, L19 0% Ra89 * 322lm L30 100%, L19 100% Ra80 * 568lm L30 0%, L19 100% Ra65 * 262lm

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only;
the data values are not guaranteed. Please use as reference materials for your planning.

General Specification


Input voltage	DC24V
LED beam angle	120°
Environment	Indoors (no condensation)
Max. length per circuit	5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachment	⑦ End cap 2pcs
Option parts	① ② ③ ④ Mounting rail ⑤ ⑥ Mounting clip ⑦ End cap ⑧ Magnet
Certification	CE, BIS
Dimmable	Yes (Dynamic white driver is required)
Power Supplies	Required

Max. connectable length per power supply

Length of LED fixture (70% loading factor) During dimmer use *: split into multiple circuits	Power supply
~3.3m	50W power supply
~6.6m*	100W power supply
~10m*	150W power supply

Light Intensity


Refer to P.73

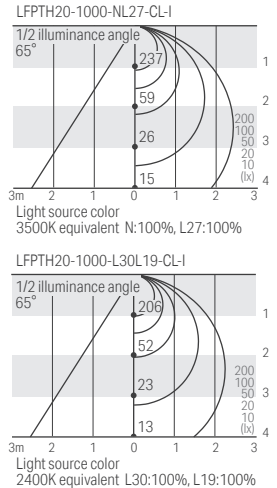


Custom order length

Luci Power FLEX THOF				
Corresponds to Length of Model No. and External dimensions				
0083	1082	2080	3078	4077
0166	1165	2163	3162	4160
0250	1248	2246	3245	4243
0333	1331	2330	3328	4326
0416	1414	2413	3411	4410
0499	1498	2496	3494	4493
0582	1581	2579	3578	4576
0666	1664	2662	3661	4659
0749	1747	2746	3744	4742
0832	1830	2829	3827	4826
0915	1914	2912	3910	4909
1000	2000	3000	4000	5000

External dimensions

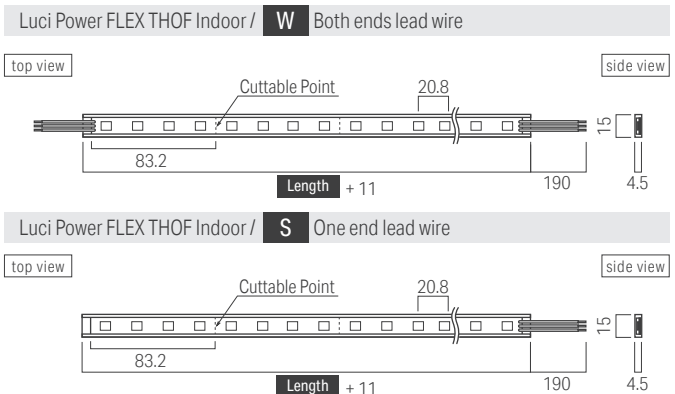


Cross sectional view when installing optional items

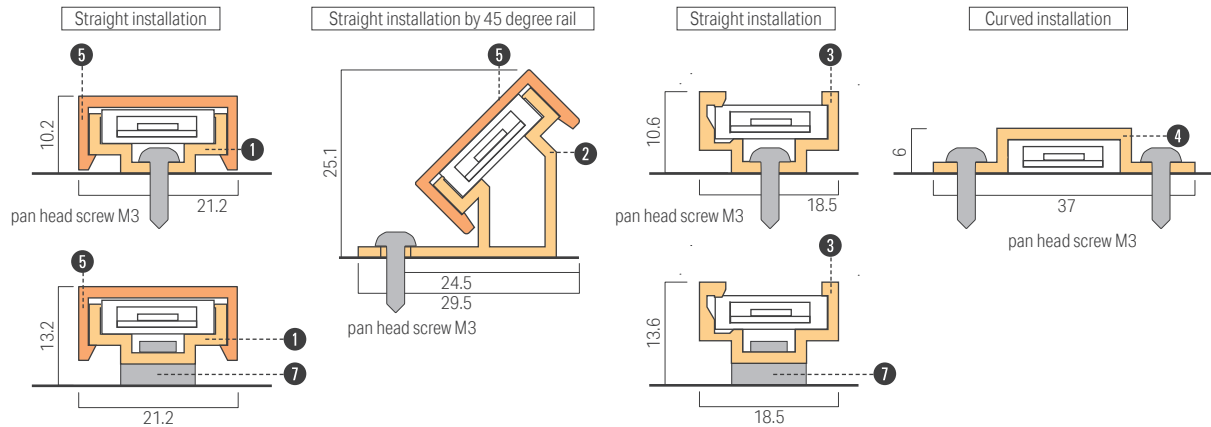

Option parts


- 1** Mounting rail 1000 for Power FLEX
Model No : LFP-RL1000
Material: AES

5 Mounting clip for rail (5pcs) is included.




- 2** 45° Mounting rail 1000 for Power FLEX
Model No : LFP-45RL1000
Material: AES

5 Mounting clip for rail (5pcs) is included.




- 3** Aluminum mounting rail 1000 for Power FLEX
Model No : LFP-RL1000-AL




- 4** Mounting clip for Power FLEX
Model No : LFP-RC
5 pcs / bag

For curved installation




- 5** Mounting clip for rail **Attachments for 1 & 2**
Model No : LFP-PT
For extra order, 5 pcs / bag



- 6** End cap for Power FLEX
Model No : LFP-EC
Attached with LED fixture on request
2 pcs / bag per LED fixture


For sealing the open end of LED fixture after cutting.
Sealing glue is required to supply by installer.
Acrylic glue is recommended.

For extra order, 2 pcs / bag




- 7** Magnet set for rail
Model No : MG-R
4 pcs / bag

Used for installing LED fixture with mounting rail **1** or **3** on metal plate.
Metal plate is required by installer.

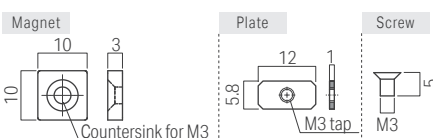

Luci Power FLEX THOF

Cutting of lamp fitting

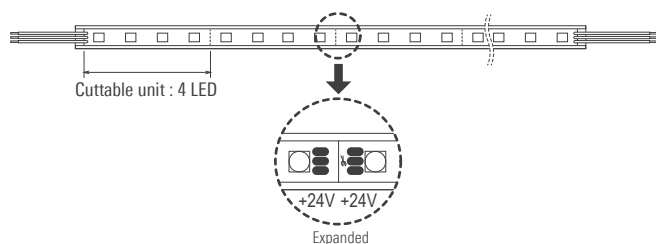


The cutable unit of Luci Power FLEX THOF is 4 LEDs.

Cutting the LED fixture at the wrong point may cause failure or a non-lit. End caps are required to seal the open end of the LED fixture after cutting. Acrylic adhesive is recommended. Do not solder cables to the circuit board of the cut LED fixture.

System configuration diagram

- Max. connectable total length of LED fixture per driver depends on the capacity of the driver and power supply.
- Max. length per circuit of Luci Power FLEX THOF is 5m. If it exceeds 5m, please split into multiple circuits.
- Max. distance from the power supply to the end of LED fixture is 10 m.
- Use an appropriate signal cable and install it according to the instructions caution of the signal cable installation.

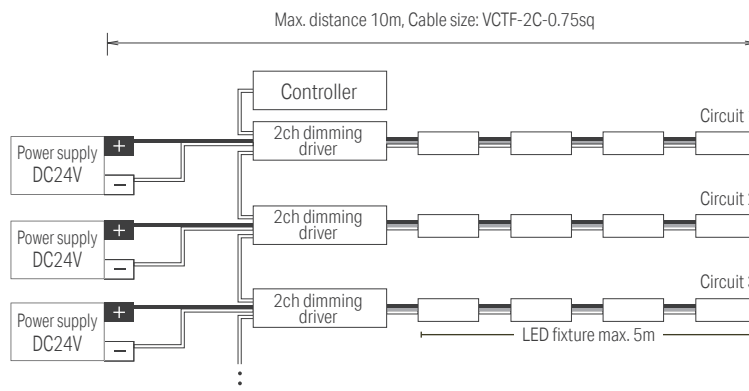

For DC24V Dynamic white series

DIM-S2L8V-0

Constant Voltage - Dimmable driver (DC input) - 2ch

0-10V/1-10V Driver 8A, 2ch

EUCHIPS



Specification

Product name	12-24VDC 0-10V analog constant voltage led dimmer
Model number	DIM-S2L8V-0
Input voltage	12V - 24V
Output channel	2ch total 8A
Size	167*51*23(mm)
Weight	100g
Usage enviroment	Indoor(no condensation)
Oparating enviroment temperature	-20℃ ~ 70℃

Connectable length per dimmer driver (DIM-S2L8V-0)

*ex. when using 150W PSU, 60% load factor

Model No.	Output (W/m)	Max. length per circuit (m)	Connectable length per driver (m)	W (VA)
LFPTH-1000-*CL-I	11	5	8.1	105

For Dynamic white series

Walldim 202

Dimmer controller - 2ch

2ch Multi Function Panel Controller

EUCHIPS



Specification

Product name	Multi-Function Touch Panel Controller
Model number	Walldim202
Input voltage	12V - 15V
Output channel	50mA 2ch
Size	86*86*26(mm)
Weight	140g
Usage enviroment	Indoor(no condensation)
Operating enviroment temperature	-10℃ ~ 40℃

* Please read and follow the specification and the instruction manual issued by the manufacturer of controller and driver.
The specification may be subject to change without prior notice.

Illuminance data

CRI and luminous flux data for each CCT combination




LFPTH20 Luci Power FLEX THOF®

Color temperature
5300K~2700K

Direct horizontal surface light intensity distribution chart


LFPTH20-1000-NL27-CL-I

Light source color 5300K
N:100%, L27:0%
Brightness 128 cd
Luminous flux 360 lm
Color rendering index Ra 89




LFPTH20-1000-NL27-CL-I

Light source color 3500K equivalent
N:100%, L27:100%
Brightness 237 cd
Luminous flux 660 lm
Color rendering index Ra 90



LFPTH20-1000-NL27-CL-I

Light source color 2700K
N:0%, L27:100%
Brightness 119 cd
Luminous flux 326 lm
Color rendering index Ra 86




LFPTH20 Luci Power FLEX THOF®

Color temperature
3000K-1900K

Direct horizontal surface light intensity distribution chart


LFPTH20-1000-L30L19-CL-I

Light source color 3000K
L30:100%, L19:0%
Brightness 117 cd
Luminous flux 322 lm
Color rendering index Ra 89




LFPTH20-1000-L30L19-CL-I

Light source color 2400K equivalent
L30:100%, L19:100%
Brightness 206 cd
Luminous flux 568 lm
Color rendering index Ra 80



LFPTH20-1000-L30L19-CL-I

Light source color 1900K
L30:0%, L19:100%
Brightness 96 cd
Luminous flux 262 lm
Color rendering index Ra 65



Light source color		Ratio of output		Ra	lm
N	W	100%	0%	89	360
		100%	100%	90	658
		0%	100%	87	348
N	WW	100%	0%	89	360
		100%	100%	90	666
		0%	100%	87	333
N	L30	100%	0%	89	360
		100%	100%	90	642
		0%	100%	87	319
N	L27	100%	0%	89	360
		100%	100%	90	660
		0%	100%	86	326
N	L24	100%	0%	89	360
		100%	100%	92	611
		0%	100%	86	291
N	L21	100%	0%	89	360
		100%	100%	85	621
		0%	100%	67	291
N	B	100%	0%	89	360
		100%	100%	58	389
		0%	100%	-	60
W	WW	100%	0%	87	348
		100%	100%	89	676
		0%	100%	87	333
W	L30	100%	0%	87	348
		100%	100%	89	663
		0%	100%	87	319
W	L27	100%	0%	87	348
		100%	100%	89	642
		0%	100%	86	326
W	L24	100%	0%	87	348
		100%	100%	89	625
		0%	100%	86	291
W	L21	100%	0%	87	348
		100%	100%	83	637
		0%	100%	67	291
W	B	100%	0%	87	348
		100%	100%	58	407
		0%	100%	-	60
WW	L30	100%	0%	87	333
		100%	100%	88	627
		0%	100%	87	319
WW	L27	100%	0%	87	333
		100%	100%	88	625
		0%	100%	86	326
WW	L24	100%	0%	87	333
		100%	100%	88	622
		0%	100%	86	291
WW	L21	100%	0%	87	333
		100%	100%	81	618
		0%	100%	67	291
WW	B	100%	0%	87	333
		100%	100%	51	387
		0%	100%	-	60
L30	L27	100%	0%	87	319
		100%	100%	85	611
		0%	100%	86	326
L30	L24	100%	0%	87	319
		100%	100%	86	606
		0%	100%	86	291
L30	L21	100%	0%	87	319
		100%	100%	79	600
		0%	100%	67	291
L30	B	100%	0%	87	319
		100%	100%	46	378
		0%	100%	-	60
L27	L24	100%	0%	86	326
		100%	100%	86	581
		0%	100%	86	291
L27	L21	100%	0%	86	326
		100%	100%	77	590
		0%	100%	67	291
L27	B	100%	0%	86	326
		100%	100%	40	365
		0%	100%	-	60
L24	L21	100%	0%	86	291
		100%	100%	77	574
		0%	100%	67	291
L24	B	100%	0%	86	291
		100%	100%	29	350
		0%	100%	-	60
L21	B	100%	0%	67	291
		100%	100%	35	349
		0%	100%	-	60

LFTF



JP Resort Izukogen
Location: Japan
Lighting design: sola associates
Construction: TAISEI CORPORATION
Photo: Yasuyuki Akiba



Hotel Stage
Location: Hong Kong
Interior design: JOPPA
Lighting design: LIGHTLINKS INTERNATIONAL LIMITED




Luci Flat FLEX F

Low power strip light with narrow LED pitch
ideal for cove & joinery lighting.
Transparent soft acrylic tube for high efficiency,
easy installation and maintenance

Specifications

Dimensions

LED pitch and cuttable unit length (mm)

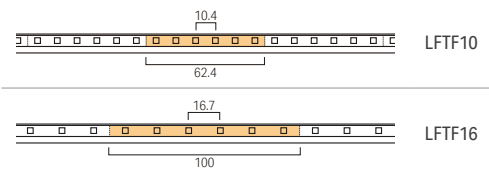


Cross section W 10 x H 4 mm
Standard length 1m with both ends open end wire
Custom order up to 5m lengths at every unit length with both ends or one end feed cable
Cutttable luminaire at site at scissor mark. If a luminaire with a both side feed cable is cut, the left and right sides of the luminaire can be used separately, as if the luminaire were one side feed.

Electrical & Output


Model	LFTF10	LFTF16
Power Consumption (W/m)	3.9	2.5
Luminous flux @ 3000K (lm/m)	300	187

Color temperature




Min Bending radius

R 50mm in top (vertical) bend direction




TIPS: Footlight

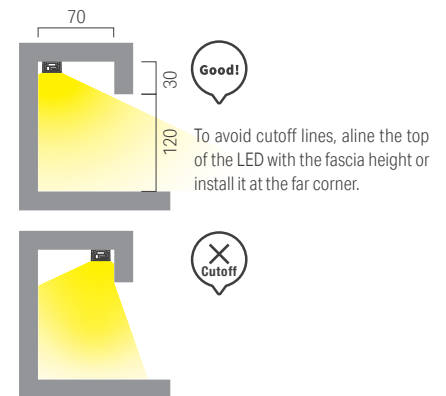

Project reference



Hotel Stage
Location: Hong Kong
Interior design: JOPPA
Lighting design: LIGHTLINKS INTERNATIONAL LIMITED
Product: LFTF10 2700K

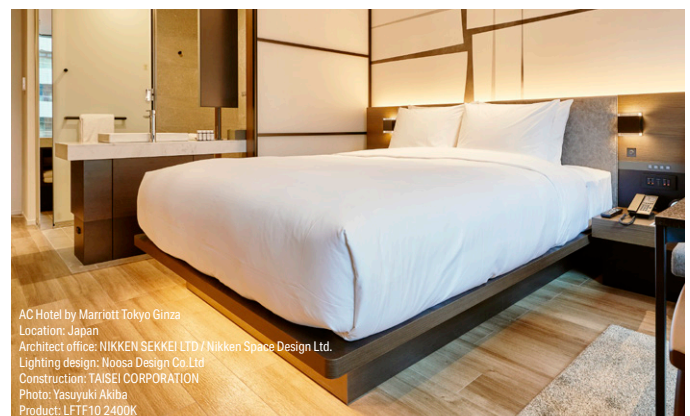

AC Hotel by Marriott Tokyo Ginza
Location: Japan
Architect office: NIKKEN SEKKEI LTD / Nikken Space Design Ltd.
Lighting design: Noosa Design Co.Ltd
Construction: TAISEI CORPORATION
Photo: Yasuyuki Akiba
Product: LFTF10 2400K

Discontinued

Luci Flat FLEX F

LFTF

Color management
ANSI BIN

CE



3 years
warranty

- Narrow LED pitch (10 or 16mm) suitable for limited space installation
- 2 types of wattage and LED pitch (3.9 W/m, 2.5 W/m)
- Customized length available up to 5m per roll



Model No.

LFTF - T - - - I

Product Name / LED pitch	Length / Lead wire	Light source color	Tube type	Environment
LFTF10 : 10mm pitch	Custom order length P.79	D : Daylight white N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K	CL : Clear DF : Diffuser	I : Indoor
LFTF16 : 16mm pitch				
	W : Both ends S : One ends			



Specification @ Clear cover

LED pitch	10mm pitch	16mm pitch
Model No.	LFTF10-T1000W- -CL-I	LFTF16-T1000W- -CL-I
Power consumption	3.9W/m	2.5W/m
Fitting length	1010mm	1010mm
Weight	40g	40g
Cuttable unit	62.4mm (6 LED)	100mm (6 LED)
Luminaire efficacy (2700K)	72.3 lm/W	70.4 lm/W
Light source color	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.	
D 7100K Ra94	* 324lm	* -
N 5300K Ra94	* 329lm*	* -
W 4200K Ra90	○ 294lm	○ -
WW 3500K Ra90	○ 305lm	○ -
L30 3000K Ra90	○ 300lm	○ 187lm*
L27 2700K Ra87	○ 282lm	○ 176lm*
L24 2400K Ra83	○ 229lm*	○ 143lm*
L19 1900K	-	-


General Specification	
Input voltage	DC24V
LED beam angle	120°
Environment	Indoors (no condensation)
Max. length per circuit	5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachment	④ End cap 2pcs
Option parts	① Mounting rail ② ③ Mounting clip ④ End cap ⑤ Magnet
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

Max. connectable length per power supply		
Length of LED fixture (70% loading factor) *: split into multiple circuits		
10mm pitch	16mm pitch	Power supply
~9m*	~14m*	50W power supply
~18m*	~28m*	100W power supply
~27m*	~42m*	150W power supply


Light Intensity Refer to P.78



External dimensions

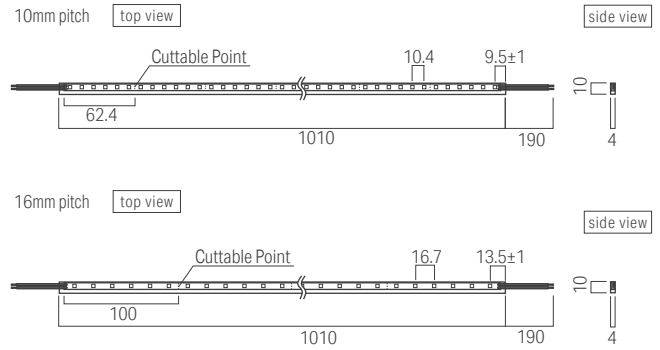

Cross sectional view when installing optional items

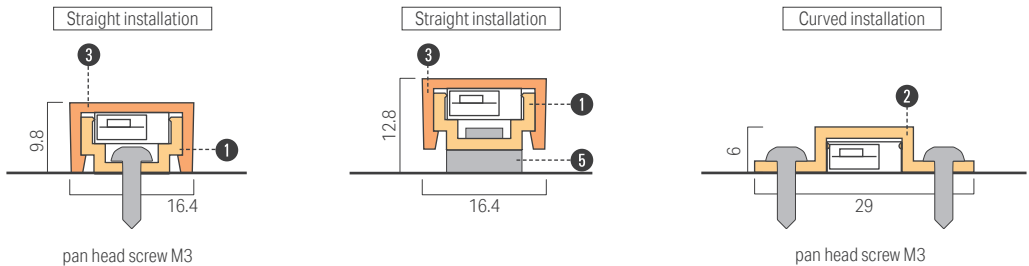

Option parts

1 Mounting rail 1000 for Flat FLEX
Model No : LFT-RL1000
Material : AES

3 Mounting clip for rail (5pcs) is included.

Dimensions: 7.5±0.2, 13.4, 42.5, 200, 200, 85, 200, 200, 42.5, 970±2. Screw hole: $\varnothing 3.5$.

2 Mounting clip for Flat FLEX
Model No : LFT-RC
10 pcs / bag

For curved installation

Screw hole: $\varnothing 4.5$, 10, 9.5, 29, 9.5, 6.

3 Mounting clip for rail **Attachment for 1**
Model No : LFT-PT
For extra order, 5 pcs / bag

Dimensions: 16.4, 7.5, 9.3, 7.5.

4 End cap for α Flat
Model No : LFX-EC
Attached with LED fixture on request
2 pcs / bag per LED fixture

For sealing the open end of LED fixture after cutting.
Sealing glue is required to supply by installer.
Acrylic glue is recommended.

For extra order,
10 pcs / bag

Adhesive for sealing poured into the body. Dimensions: 6, 6.2, 12, 12.3, 10.9, 6.2.

5 Magnet set for rail
Model No : MG-R
4 pcs / bag





Used for installing LED fixture with mounting rail **1** on metal plate.
Metal plate is required by installer.

Parts: Magnet (10x10, 3), Plate (12x12, 1, 5.8, M3 tap), Screw (M3). Countersink for M3.


Luci Flat FLEX F

Installing the product

Straight installation

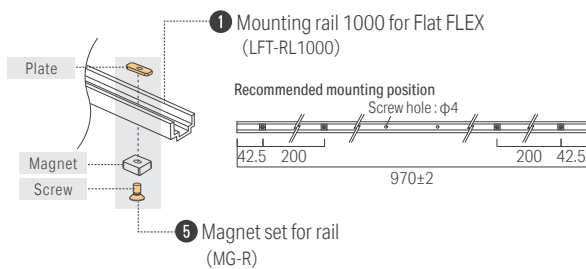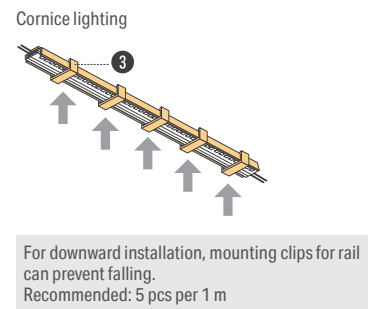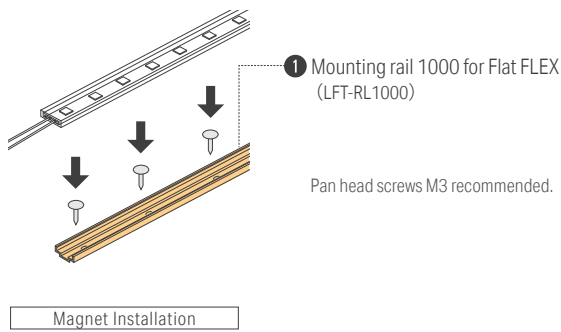


Curved installation

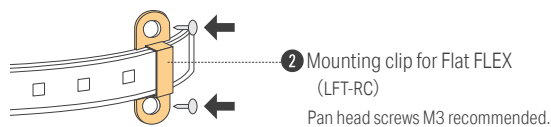

Minimum bending radius




Cutting of lamp fitting

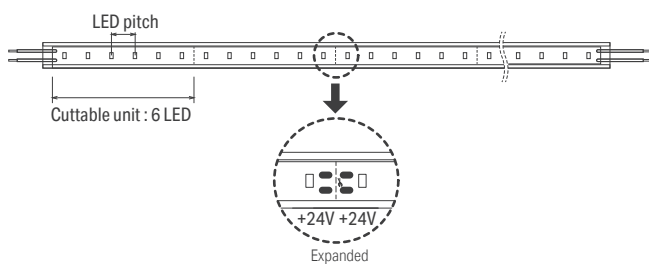

The cuttable unit of Luci Flat FLEX F is 6 LEDs.

Cutting the LED fixture at the wrong point may cause failure or a non-lit. End caps are required to seal the open end of the LED fixture after cutting. Acrylic adhesive is recommended. Do not solder cables to the circuit board of the cut LED fixture.

System configuration diagram

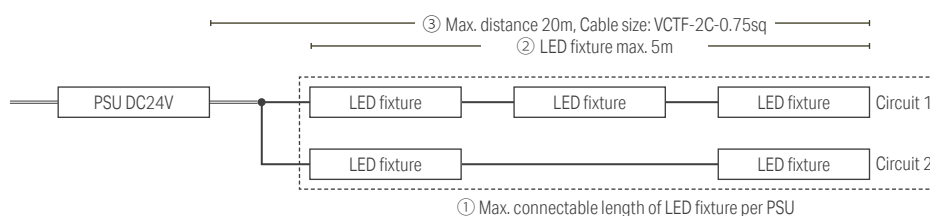

- 1 Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- 2 If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- 3 To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci Flat FLEX F Indoor -Custom order-

Model No.

LFTF - T - - |

LED Pitch

Length

Lead Wire

Light source color

Tube type

Environment

10

10mm Pitch

16

16mm Pitch

Refer to
"Custom order
products size"

W

Both ends lead wire

S

One end lead wire

D

Daylight white7100K

N

Natural white5300K

W

White4200K

WW

Warm white 3500K3500K

L30

Warm white 3000K3000K

L27

Warm white 2700K2700K

L24

Warm white 2400K2400K

CL

Clear

DF

Diffuser


I

Indoor

External dimension


Luci Flat FLEX F Indoor / W Both ends lead wire

LFTF - T W - - - I



Luci Flat FLEX F Indoor / S One end lead wire

LFTF - T S - - - I



- The lead wires are delivered without connectors. Contact us if indoor connectors are needed.

Custom order products size

Luci Flat FLEX F 10mm pitch (3.9 W/m)				
Corresponds to Length of Model No. and External dimensions				
0063	1063	2063	3063	4063
0125	1125	2125	3125	4125
0188	1188	2188	3188	4188
0250	1250	2250	3250	4250
0313	1313	2313	3313	4313
0375	1375	2375	3375	4375
0438	1438	2438	3438	4438
0500	1500	2500	3500	4500
0563	1563	2563	3563	4563
0625	1625	2625	3625	4625
0688	1688	2688	3688	4688
0750	1750	2750	3750	4750
0813	1813	2813	3813	4813
0875	1875	2875	3875	4875
0938	1938	2938	3938	4938
1000	2000	3000	4000	5000


Luci Flat FLEX F 16mm pitch (2.5 W/m)				
Corresponds to Length of Model No. and External dimensions				
0100	1100	2100	3100	4100
0200	1200	2200	3200	4200
0300	1300	2300	3300	4300
0400	1400	2400	3400	4400
0500	1500	2500	3500	4500
0600	1600	2600	3600	4600
0700	1700	2700	3700	4700
0800	1800	2800	3800	4800
0900	1900	2900	3900	4900
1000	2000	3000	4000	5000

Color temperature of diffuser tube type

Nominal light source color temperature(clear tube)		Color temperature through diffuser tube*1
D	7100 K	5200 K
N	5300 K	4400 K
W	4200 K	3700 K
WW	3500 K	3000 K
L30	3000 K	2700 K
L27	2700 K	2400 K
L24	2400 K	2100 K

*1:

The optical data provided above is for reference only. Due to the tolerances of the production process, values for color temperature can vary ±10%. The lumen output value of the diffuser tube type is 20~30% less than the clear tube type.

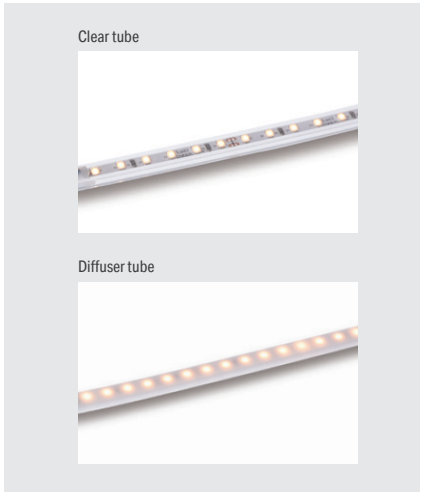



LFTF10 Luci Flat FLEX 10mm pitch


Color temperature

7100K 5300K 4200K 3500K 3000K 2700K 2400K

Direct horizontal surface light intensity distribution chart


LFTF10-T1000W-D-CL-I

Light source color 7100K
Brightness 121 cd
Luminous flux 324 lm
Color rendering index Ra 94




LFTF10-T1000W-N-CL-I

Light source color 5300K
Brightness 123 cd
Luminous flux 329 lm
Color rendering index Ra 94




LFTF10-T1000W-W-CL-I

Light source color 4200K
Brightness 97 cd
Luminous flux 294 lm
Color rendering index Ra 90




LFTF10-T1000W-WW-CL-I

Light source color 3500K
Brightness 100 cd
Luminous flux 305 lm
Color rendering index Ra 90




LFTF10-T1000W-L30-CL-I

Light source color 3000K
Brightness 107 cd
Luminous flux 300 lm
Color rendering index Ra 90




LFTF10-T1000W-L27-CL-I

Light source color 2700K
Brightness 96 cd
Luminous flux 282 lm
Color rendering index Ra 87



LFTF10-T1000W-L24-CL-I


Light source color 2400K
Brightness 78 cd
Luminous flux 229 lm
Color rendering index Ra 83




Recommend dimensions and illumination distributions

@2700K


Cornice lighting-1 CH=2800

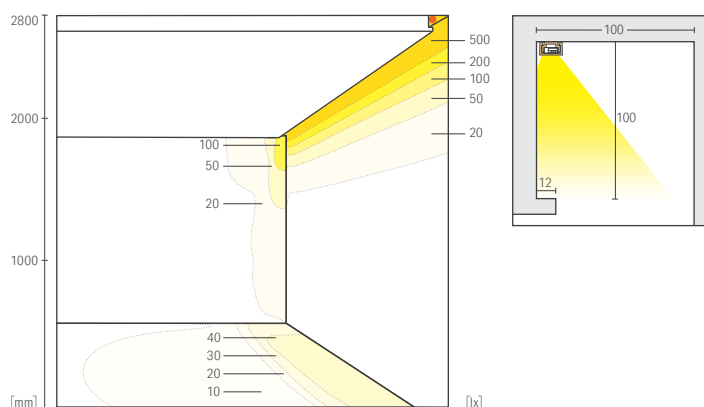

Cornice lighting-2 CH=2800

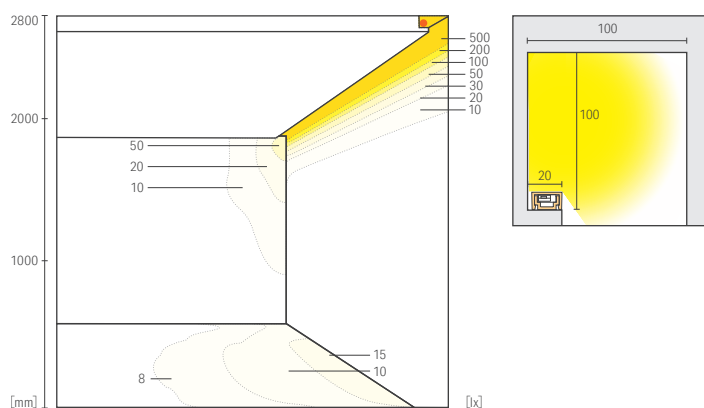

Cove lighting CH=2800

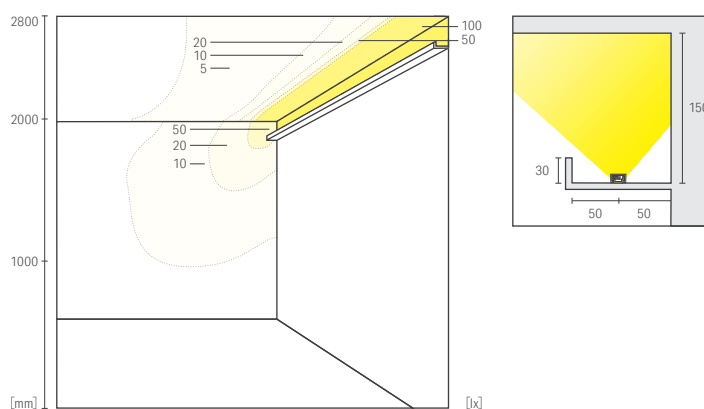

Illuminance data




LFTF16
Luci Flat FLEX 16mm pitch


Color temperature
7100K 5300K 4200K 3500K 3000K 2700K 2400K

Direct horizontal surface light intensity distribution chart

LFTF16-T1000W-L30-CL-I
Light source color 3000K
Brightness 50 cd
Luminous flux 187 lm
Color rendering index Ra 90



LFTF16-T1000W-L27-CL-I
Light source color 2700K
Brightness 50 cd
Luminous flux 176 lm
Color rendering index Ra 87



LFPA



THE QUAYSIDE
Location: Hong Kong
Lighting Design: LIGHTLINKS INTERNATIONAL LIMITED



KANDAMINAMIGUCHIKENSHIN CLINIC
Architect Office: YAMADA ARCHITECTS & ENGINEERS, INC.
Lightening Design: YAMADA ARCHITECTS & ENGINEERS, INC.
Construction: TAMOTSU CORPORATION
Photo: SS OSAKA




Luci Power FLEX α

Side bend flexible strip with clear soft acrylic tube ideal for curved light trough
Cuttable every 2 LEDs (40 mm) at site

Specifications

Dimensions

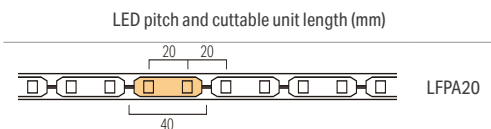


Cross section W 13.7 x H 13.4 mm
Standard length 970 mm with both ends open end wire

Electrical & Output

Model	LFPA20
Power Consumption (W/m)	10.4
Luminous flux @ 3000K (lm/m)	550

Color temperature




Min Bending radius


R 150mm in side (horizontal) bend direction




TIPS: Curved cove light

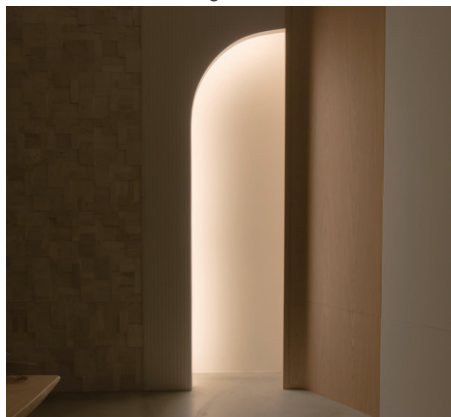

To avoid cutoff lines, align the top of the LED with the fascia height or install it at the far corner.

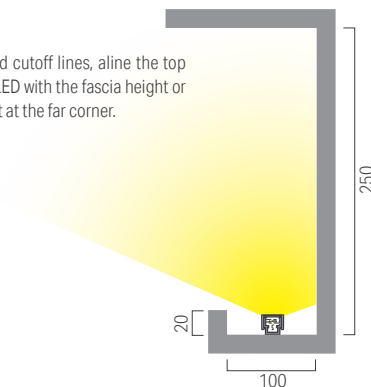

Project reference

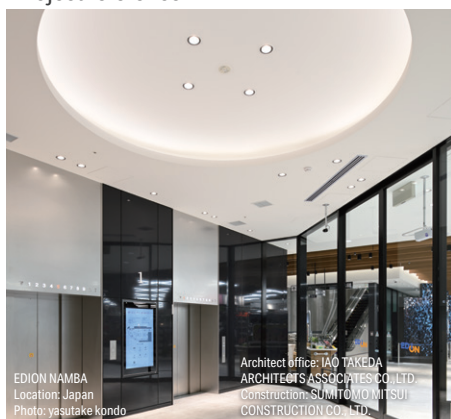

LFPA

Color management
ANSI BIN



3 years
warranty

- Flexible strip with bending sideways suitable for curved light trough
- Cuttable every 2 LEDs (40mm)
- Accessory for straight/curved installation




Model No.

LFPA20 - 0960 - □ - CL - I

Product Name / LED pitch	Length	Light source color	Tube type	Environment
LFPA20 : 20mm pitch	0960	N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L19 : Warm white 1900K	CL : Clear	I : Indoor

Light Intensity Refer to P.87




Specification

LED pitch	20mm pitch	
Model No.	LFPA20-0960-□ - CL-I	
Power consumption	10.4W/m	
Fitting length(L)	970mm	
Weight	60g	
Cuttable unit	40mm (2 LED)	
Luminaire efficacy(2700K)	74.1 lm/W	
Light source color	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.	
D 7100K	-	
N 5300K Ra90	○	613lm
W 4200K Ra90	○	640lm
WW 3500K Ra90	○	613lm
L30 3000K Ra90	○	555lm
L27 2700K Ra90	○	540lm
L24 2400K Ra90	○	440lm
L19 1900K Ra70	*	482lm

General Specification

Input voltage	DC24V
LED beam angle	120°
Environment	Indoors (no condensation)
Max. length per circuit	5m
Min. bending range	R150mm
Material (body)	Soft acrylic
Attachments	④ End cap 2pcs
Option parts	① Mounting rail ② Mounting parts ③ Mounting clip ④ End cap ⑤ Magnet
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM, etc.)
Power Supplies	Required


External dimensions

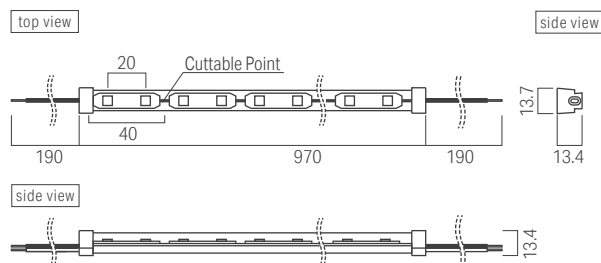






Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~3.5m	50W power supply
~7m*	100W power supply
~10.5m*	150W power supply

Cross sectional view when installing optional items

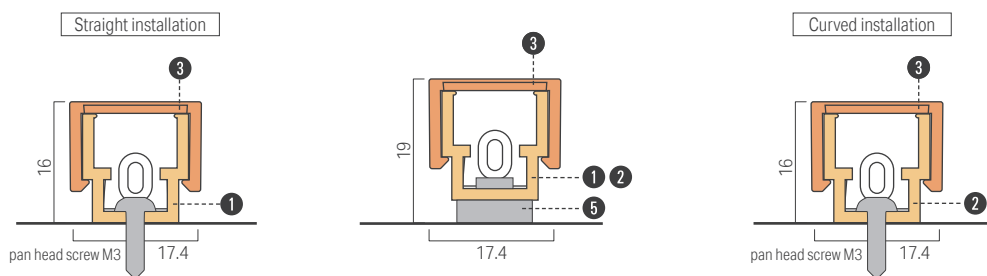


Option parts

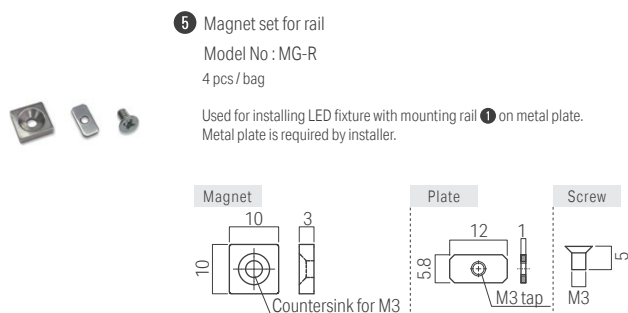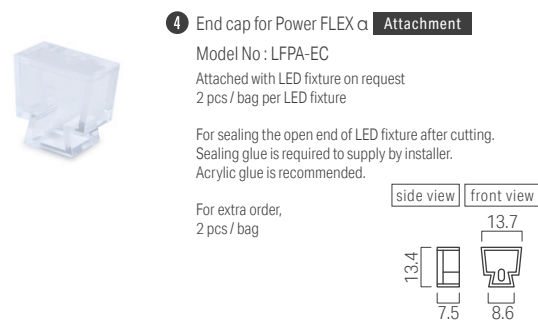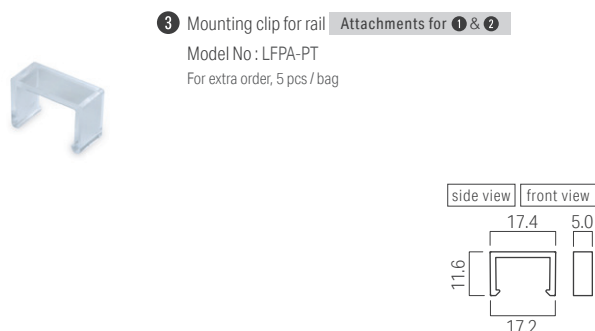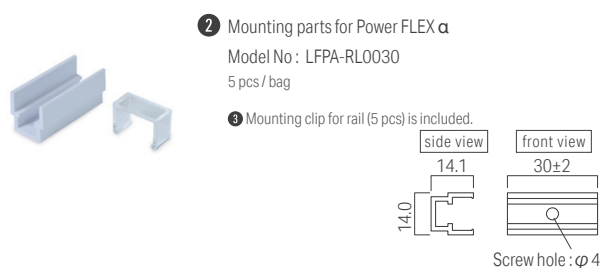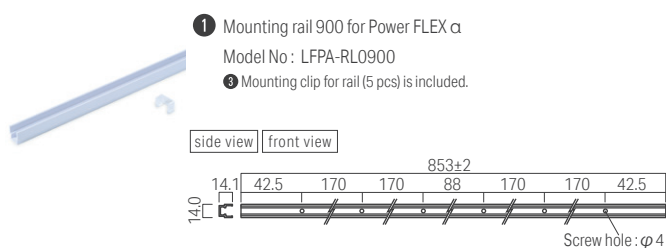

Luci Power FLEX α


Installing the product

Straight installation

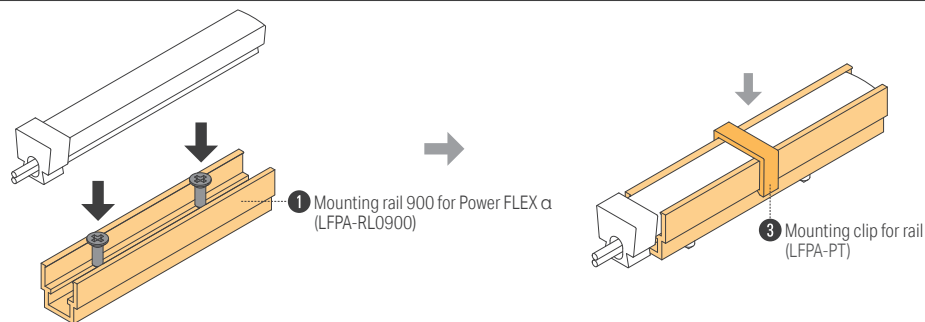


Magnet Installation


Mounting rail 1000 for Power FLEX

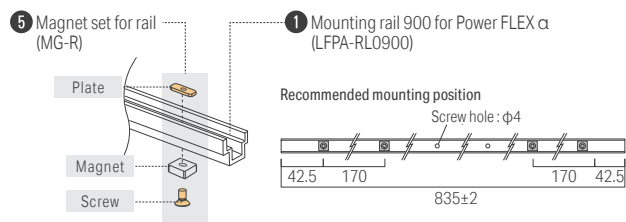

Curved installation

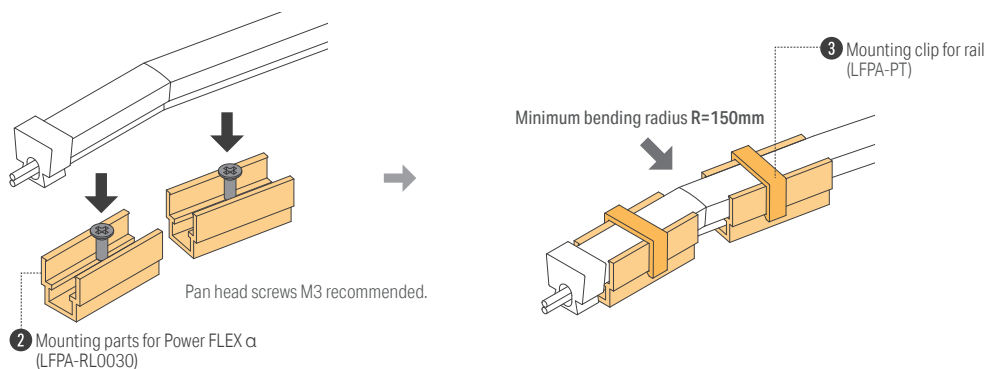


Cutting of lamp fitting



The cuttable unit of Luci Power FLEX α is 2 LEDs.

Cutting the LED fixture at the wrong point may cause failure or a non-lit. End caps are required to seal the open end of the LED fixture after cutting. Acrylic adhesive is recommended. Do not solder cables to the circuit board of the cut LED fixture.

System configuration diagram

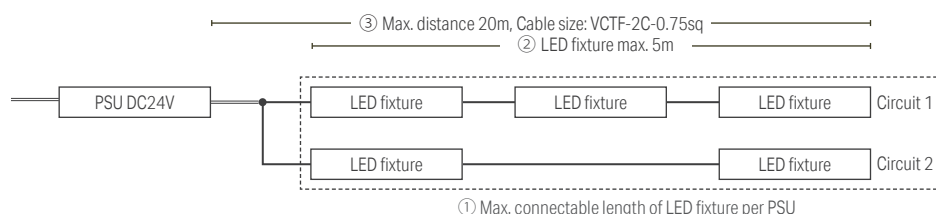

① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)

② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.

③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Illuminance data




LFPA20 Luci Power FLEX α

Color temperature


5300K 4200K 3500K 3000K 2700K 2400K 1900K

Direct horizontal surface light intensity distribution chart


LFPA20-0960-N-CL-I
Light source color 5300K
Brightness 220 cd
Luminous flux 613 lm
Color rendering index Ra 90




LFPA20-0960-W-CL-I
Light source color 4200K
Brightness 229 cd
Luminous flux 640 lm
Color rendering index Ra 90




LFPA20-0960-WW-CL-I
Light source color 3500K
Brightness 219 cd
Luminous flux 613 lm
Color rendering index Ra 90




LFPA20-0960-L30-CL-I
Light source color 3000K
Brightness 198 cd
Luminous flux 555 lm
Color rendering index Ra 90



LFPA20-0960-L27-CL-I
Light source color 2700K
Brightness 193 cd
Luminous flux 540 lm
Color rendering index Ra 90




LFPA20-0960-L24-CL-I
Light source color 2400K
Brightness 158 cd
Luminous flux 440 lm
Color rendering index Ra 90




Recommend dimensions and illumination distributions

@2700K


Cornice lighting-1 CH=2800

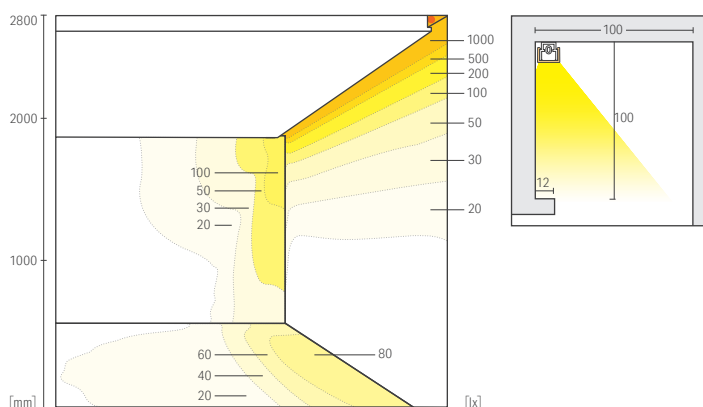

Cornice lighting-2 CH=2800

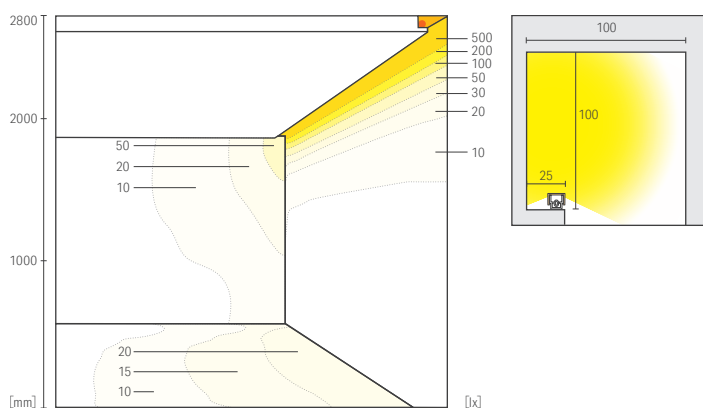

Cove lighting CH=2800

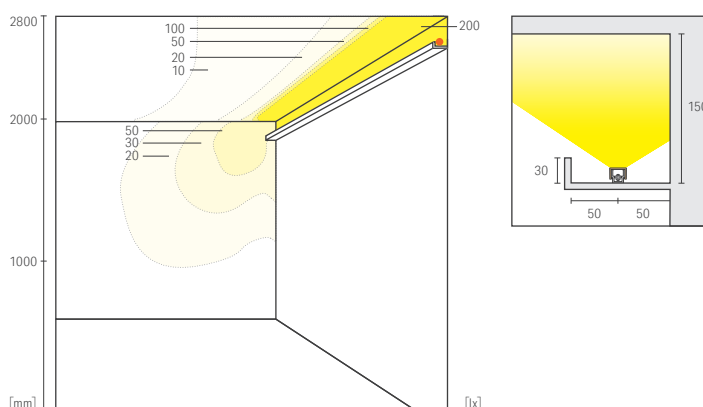

Indoor
Strip light

LFXF-I Luci FLEX α F Indoor



LFXF-I



Grissini - Grand Copthorne Waterfront Singapore
Location: Singapore
Lighting design: Light Cibles
Photo: Alistair Chia



Mr. & Mrs. FOX
Location: Hong Kong
Client: Swire Restaurants
Lighting design: SPECTRUM DESIGN & ASSOCIATES(ASIA)




Luci FLEX α F Indoor

Side bend flexible strip with clear or diffused soft acrylic tube
Only 4mm thickness with side view LED package,
suitable for limited space installation
Cuttable every 6 LEDs (62.5 mm) and customized length available
up to 5m per roll

Specifications

Dimensions

LED pitch and cuttable unit length (mm)



Cross section W 10 x H 4 mm
Standard length 1m with both ends open end wire
Custom order up to 5m lengths at every unit length with both ends or one end feed cable
Cuttable luminaire at site at scissor mark. If a luminaire with a both side feed cable is cut, the left and right sides of the luminaire can be used separately, as if the luminaire were one side feed.

Electrical & Output


Model	LFXF10
Power Consumption (W/m)	4.2
Luminous flux @ 3000K (lm/m)	292

Color temperature


7100K	4200K	3500K	3000K	2700K	2400K
-------	-------	-------	-------	-------	-------

Min Bending radius

R 50mm in side (horizontal) bend direction



TIPS: Shelf with curved slit

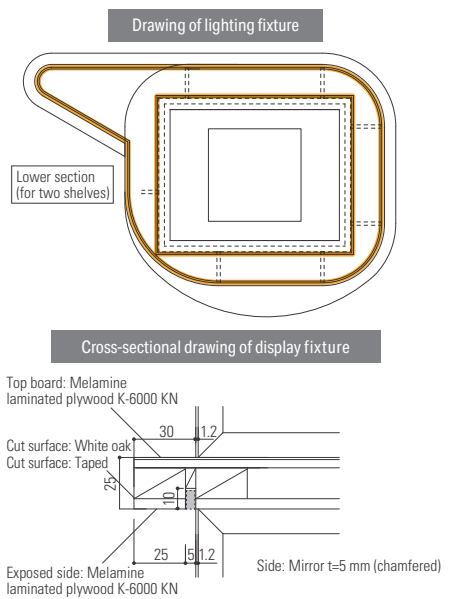

Project reference



Luci FLEX α F Indoor

LFXF

Color management
ANSI BIN



3 years
warranty

- Side bend flexible strip with 4 × 10 mm cross-section
- Cuttable every 6 LEDs (62.5mm)
- Accessory for straight/curved installation




Model No.

LFXF - **T** - - - **I**

Product Name / LED pitch	Length / Lead wire	Light source color	Tube type	Environment
LFXF10	Custom order length P.93	D : Daylight white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K	CL : Clear DF : Diffuser	I : Indoor
	W : Both ends S : One ends			

Light Intensity Refer to P.94




Specification @ Clear cover

LED pitch	10mm pitch		
Model No.	LFXF10-T1000W-CL-I		
Wattage	4.2W/m		
Fitting length(L)	1010mm		
Weight	40g		
Cuttable unit	62.5mm (6 LED)		
Luminaire efficacy(2700K)	66.3 lm/W		
Light source color	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.		
D 7100K Ra74		*	329lm*
N 5300K		-	
W 4200K Ra70		○	317lm*
WW 3500K Ra75		○	298lm*
L30 3000K Ra70		○	292lm*
L27 2700K Ra71		○	278lm
L24 2400K Ra65		*	251lm*
L19 1900K		-	

General Specification

Input voltage	DC24V
LED beam angle	120°
Environment	Indoors (no condensation)
Max. length per circuit	5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachments	⑤ End cap 2pcs
Accessories	① Mounting rail ② Mounting parts ③ ④ Mounting clip ⑤ End cap
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required


External dimensions

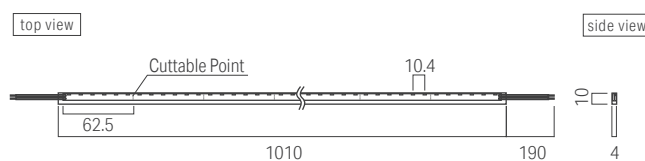


Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~8.3m*	50W power supply
~16.7m*	100W power supply
~25.1m*	150W power supply


Cross sectional view when installing optional items

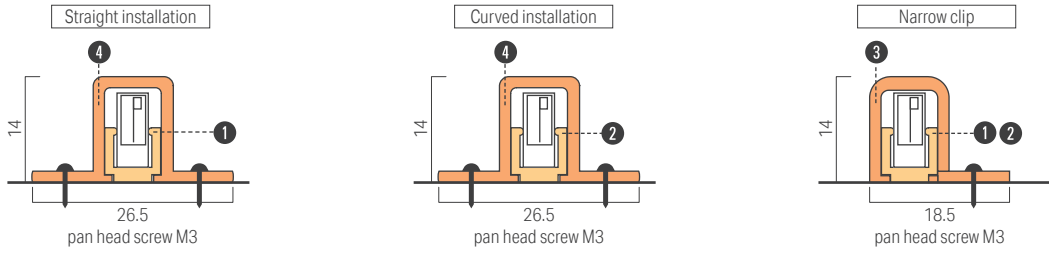


Option parts

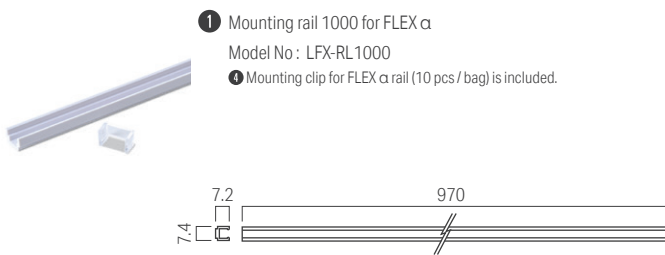


- 1 Mounting rail 1000 for FLEX α
Model No : LFX-RL1000
1 Mounting clip for FLEX α rail (10 pcs / bag) is included.

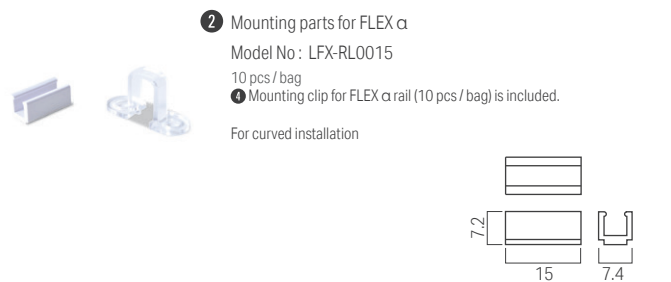


- 2 Mounting parts for FLEX α
Model No : LFX-RL0015
10 pcs / bag
1 Mounting clip for FLEX α rail (10 pcs / bag) is included.
For curved installation

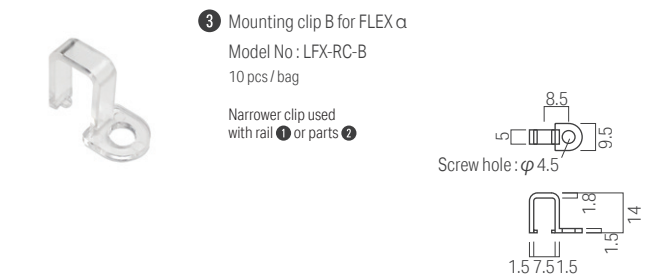

- 3 Mounting clip B for FLEX α
Model No : LFX-RC-B
10 pcs / bag
Narrower clip used with rail 1 or parts 2

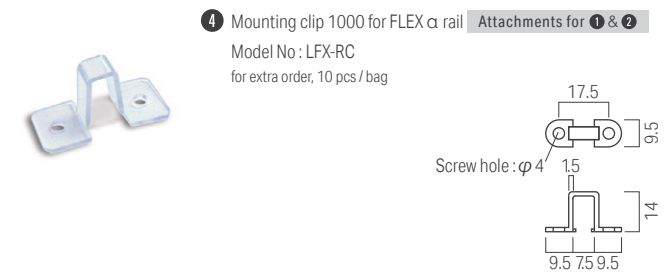


- 4 Mounting clip 1000 for FLEX α rail Attachments for 1 & 2
Model No : LFX-RC
for extra order, 10 pcs / bag

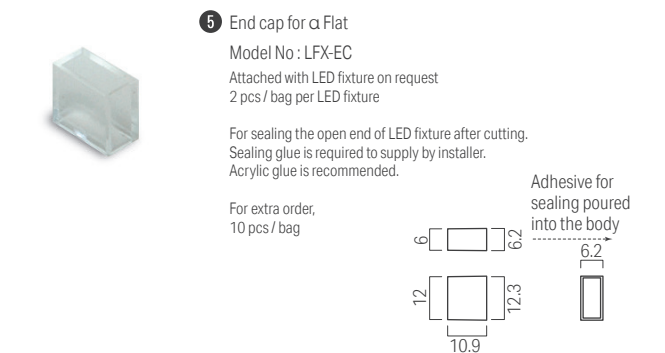

- 5 End cap for α Flat
Model No : LFX-EC
Attached with LED fixture on request
2 pcs / bag per LED fixture

For sealing the open end of LED fixture after cutting.
Sealing glue is required to supply by installer.
Acrylic glue is recommended.


For extra order,
10 pcs / bag




Luci FLEX α F Indoor

Installing the product


Straight installation

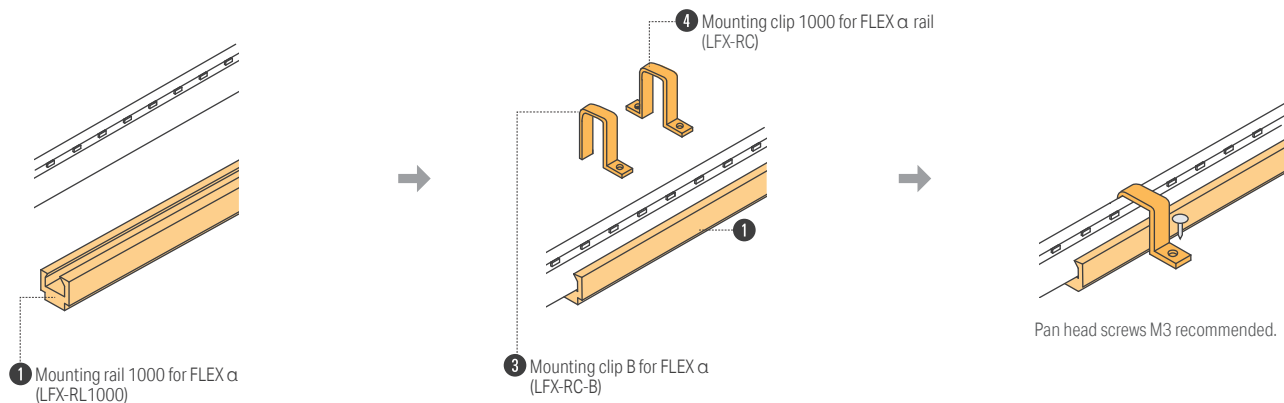

Curved installation

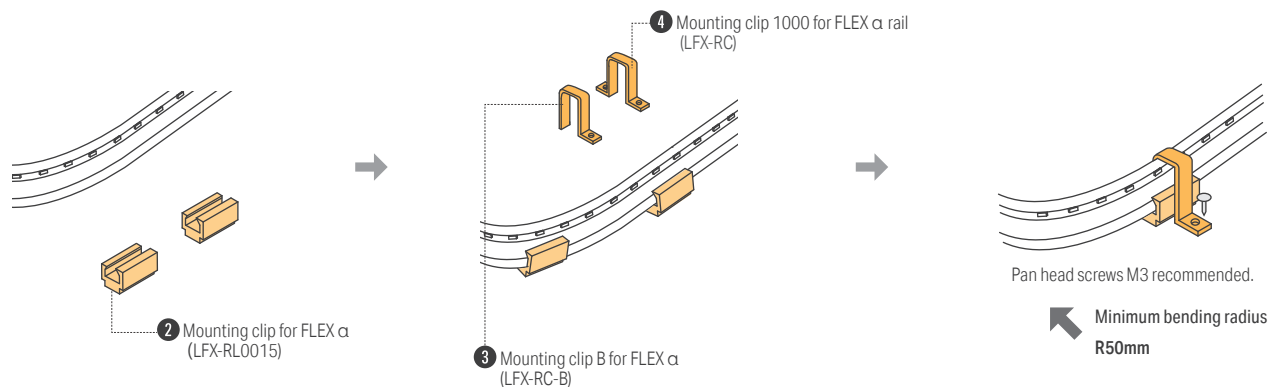


Cutting of lamp fitting

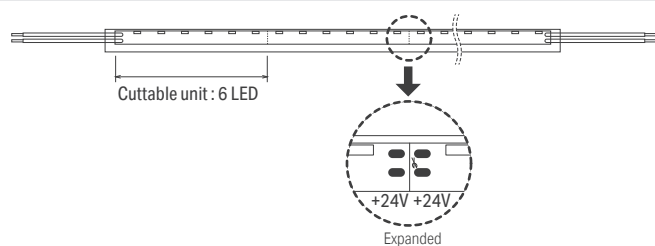

The cuttable unit of Luci FLEX α F is 6 LEDs.

Cutting the LED fixture at the wrong point may cause failure or a non-lit. End caps are required to seal the open end of the LED fixture after cutting. Acrylic adhesive is recommended. Do not solder cables to the circuit board of the cut LED fixture.

System configuration diagram

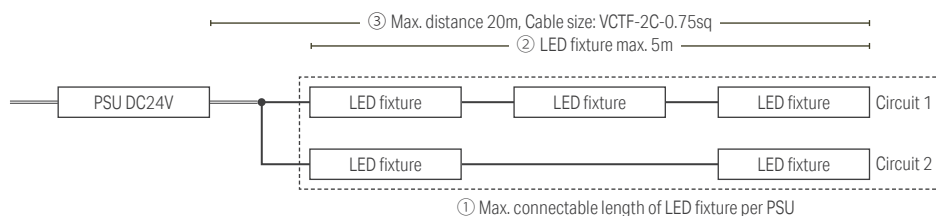

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)



88 Cove Drive, Sentosa House
Location: Singapore
Interior Design: Studio MK27
Lighting Design: SWITCH



TOTO Headquarters office building, Jakarta
Location: Indonesia
Lighting Design: Lumina Group



Luci Vivoxy Graze

Wall grazing light to beautifully accentuate wall elements with new and powerful high CRI LED
Original optical lens with less scalloping and applicable for wide range of offset distances
Selectable brightness by choosing different output from constant current driver

Specifications

Dimensions

Cross section W 27xH 24 mm
Length 4 types of fixed length

1200	900
600	300

Color temperature

5000K	4000K	3500K	3000K	2700K	2200K
-------	-------	-------	-------	-------	-------


Ra 90

NEW Upgraded to High CRI and brighter LED Package

Electrical & Output

Input current	700 mA	500 mA	350 mA
Power Consumption (W/m)	38.9	27.8	18.9
Luminous flux @ 3000K (lm/m)	3485	2609	1876

Optics


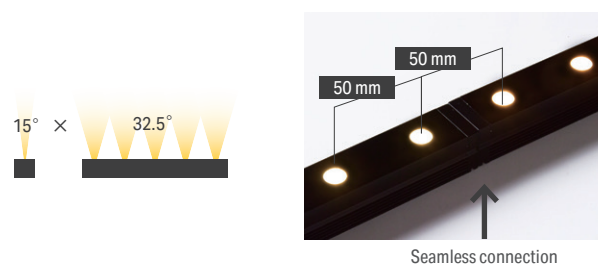


Accessories

Adjustable mounting fixture



Anti glare louver

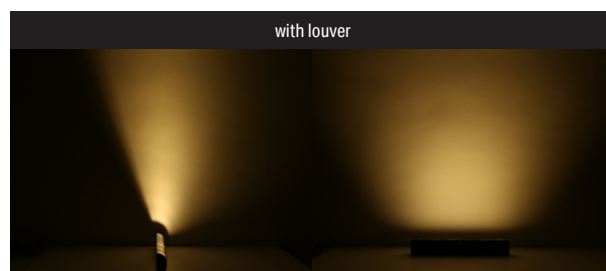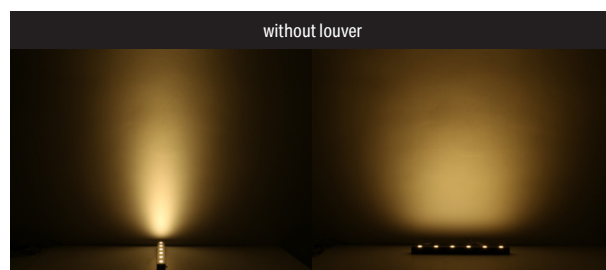

Project reference



only L22

Color management
MacAdam

Color management
ANSI BIN

3 years
warranty

- For grazing light with spread lens 15° x 32° with High CRI LED
- 3 different brightness by choosing 350mA, 500mA or 700mA C.C driver
- Adjustable bracket and louver is available

Model No.

LVV50




SP



I

Product Name / LED pitch	Length	Light source color	Beam angle	Environment
LVV50 : 50mm pitch	0300 0600 0900 1200	N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L22 : Warm white 2200K	SP: 15° x 32.5°	I : Indoors

Light Intensity Refer to P.102



Specification


Length	0300			0600			0900			1200		
Model No.	LVV50-0300-□-SP-I			LVV50-0600-□-SP-I			LVV50-0900-□-SP-I			LVV50-1200-□-SP-I		
Rated input current	700mA	500mA	350mA	700mA	500mA	350mA	700mA	500mA	350mA	700mA	500mA	350mA
Power consumption (Max.)	12W	8W	6W	24W	17W	11W	35W	25W	17W	47W	33W	23W
Power consumption (Max.) L22	13W	9W	6W	26W	18W	12W	38W	27W	18W	51W	36W	24W
Fitting length(L)	300mm			600mm			900mm			1200mm		
Weight	180g			360g			540g			720g		
Luminaire efficacy(2700K)	83.4 lm/W@700mA			83.4 lm/W@700mA			83.4 lm/W@700mA			83.4 lm/W@700mA		
Light source color	○ = Device inventory * = Equivalent											
Rated input current	700mA	500mA	350mA	700mA	500mA	350mA	700mA	500mA	350mA	700mA	500mA	350mA
D 7100K	-	-	-	-	-	-	-	-	-	-	-	-
N 5000K Ra90	○ 1258 lm*	○ 942 lm*	○ 677 lm*	○ 2517 lm*	○ 1884 lm*	○ 1354 lm*	○ 3775 lm*	○ 2826 lm*	○ 2031 lm*	○ 5034 lm	○ 3769 lm	○ 2708 lm
W 4000K Ra92	○ 1244 lm*	○ 941 lm*	○ 670 lm*	○ 2489 lm*	○ 1881 lm*	○ 1339 lm*	○ 3733 lm*	○ 2822 lm*	○ 2009 lm*	○ 4977 lm	○ 3762 lm	○ 2678 lm
WW 3500K Ra92	○ 1163 lm*	○ 871 lm*	○ 626 lm*	○ 2326 lm*	○ 1741 lm*	○ 1252 lm*	○ 3489 lm*	○ 2612 lm*	○ 1877 lm*	○ 4652 lm	○ 3483 lm	○ 2503 lm
L30 3000K Ra92	○ 1046 lm*	○ 783 lm*	○ 563 lm*	○ 2091 lm*	○ 1566 lm*	○ 1125 lm*	○ 3137 lm*	○ 2348 lm*	○ 1688 lm*	○ 4183 lm	○ 3131 lm	○ 2251 lm
L27 2700K Ra94	○ 980 lm*	○ 734 lm*	○ 528 lm*	○ 1961 lm*	○ 1468 lm*	○ 1055 lm*	○ 2941 lm*	○ 2202 lm*	○ 1583 lm*	○ 3921 lm	○ 2936 lm	○ 2110 lm
L22 2200K Ra 82	○ 802 lm*	○ 600 lm*	○ 432 lm*	○ 1604 lm*	○ 1201 lm*	○ 863 lm*	○ 2406 lm*	○ 1801 lm*	○ 1295 lm*	○ 3208 lm	○ 2402 lm	○ 1726 lm
L19 1900K	-	-	-	-	-	-	-	-	-	-	-	-

Specification may be subject to change without announcement. The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input current	700mA	500mA	350mA
LED beam angle	15° x 32.5°		
Environment	Indoors (no condensation)		
Max. length per run*	2.7m (L22: 2.4m)	4.2m (L22: 3.6m)	6m (L22: 5.4m)
Material (body)	Aluminum(black), Polycarbonate		
Attachments	① Mounting fixture 2pcs		
Option parts	① Mounting fixture ② Adjustable mounting fixture ③ Fall prevention mounting fixture ④ Louver ⑤ Joint cable		
Certification	CE		
Dimmable	Yes (0-10V, DALI)		
Power Supplies	Constant current driver is required.		

External dimensions

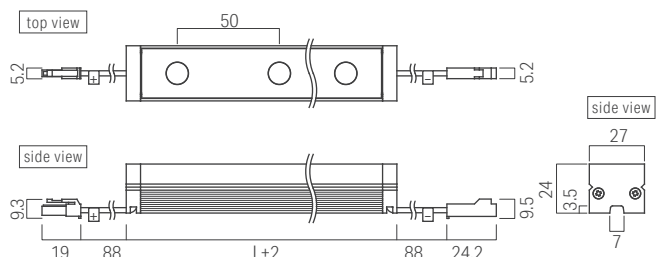


* The connectable number of luminaires depends on the output voltage of the driver used. Check the instructions in the driver manual.

Min. and Max. length per run for Meanwell HVGC series

* A: ON/OFF, B: 0-10V dimming type

Rated current	Meanwell Model No.	Rated wattage	Constant current region	Connectable length range of LVV50
700mA	HVGC-65-700-*	65W	9-93V	0.3-1.2m (L22: 0.3-0.9m)
	HVGC-100-700-*	100W	15-142V	0.6-1.8m (L22: 0.6-1.5m)
	HVGC-150-700-*	150W	21-215V	0.6-2.7m (L22: 0.6-2.4m)
500mA	HVGC-65-500-*	65W	13-130V	0.6-1.8m (L22: 0.3-1.5m)
	HVGC-150-500-*	150W	30-300V	0.9-4.2m (L22: 0.9-3.6m)
350mA	HVGC-65-350-*	65W	18-186V	0.6-2.4m (L22: 0.6-2.1m)
	HVGC-100-350-*	100W	29-285V	0.9-3.9m (L22: 0.9-3.6m)
	HVGC-150-350-*	150W	42-428V	1.2-6.0m (L22: 1.2-5.4m)

Cross sectional view

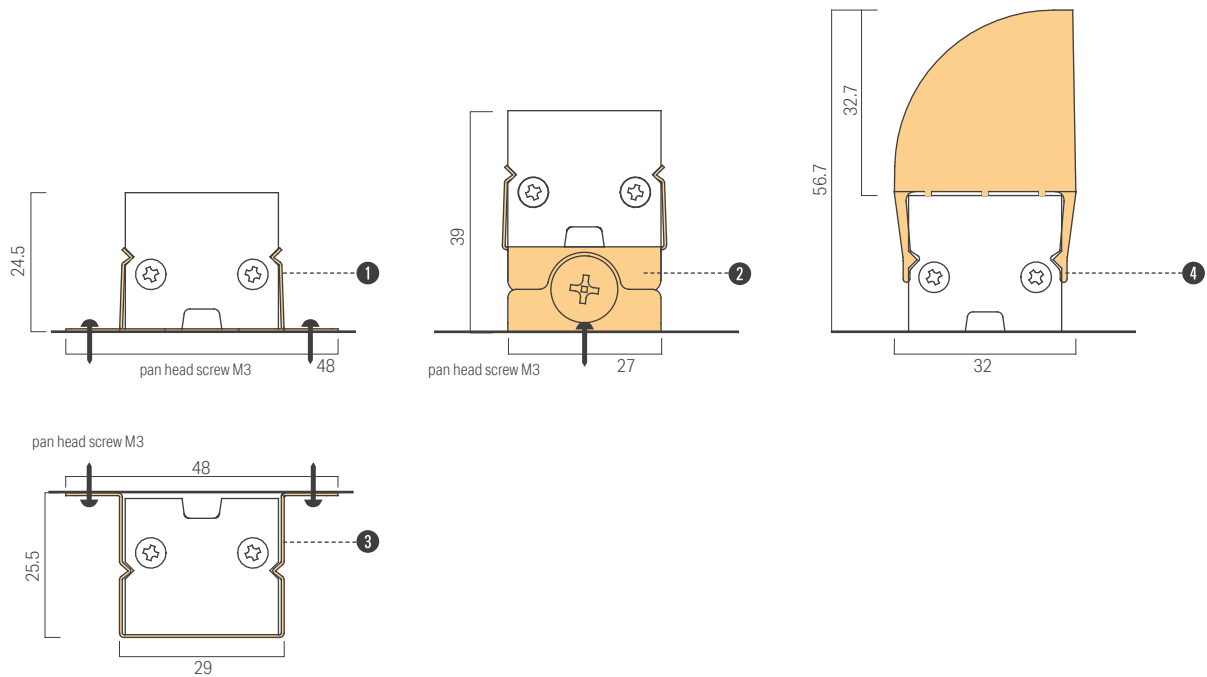

Option parts

1 Mounting fixture for Vivoxo Graze **Attachment**




Model No : LVV-PT-A
Attached with LED fixture
2 pcs per LED fixture

For extra order
1 pc / bag

top view

side view



2 Adjustable mounting fixture for Vivoxo Graze




Model No : LVV-PT-B
1 pc/bag

2 pcs per LED fixture is recommended.

For tilting installation

top view

side view



3 Fall prevention mounting fixture for Vivoxo Graze




Model No : LVV-PT-C
1 pcs/1 bag

2 pcs per LED fixture is recommended.


For downward installation

top view

side view



5 Joint cable set 5M for Vivoxo Graze **Required**




Model No : CAD-5000-SETB-I

1 pc per circuit for connecting the LED fixture to power supply or dimmer driver.

Red : + , Black : -

Socket side

Plug side




4 Louver for Vivoxo Graze



Model No : LVV50-LV0150
150mm×2 pcs / set

1 set for each 300mm LED fixture.


A dedicated louver can be installed on Luci Vivoxo Graze. Direct glare in a parallel or vertical direction against the lighting apparatus can be prevented.

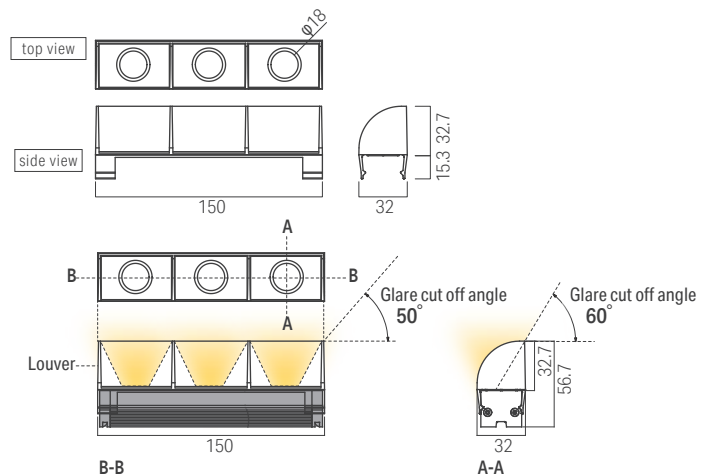


Vivoxo Graze

Installing the product


Mounting fixture installation

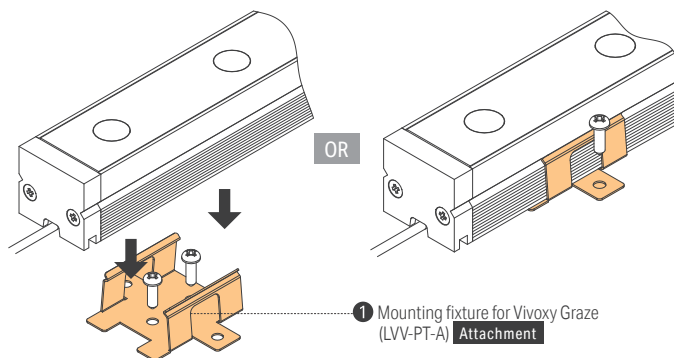

Adjustable fixture installation

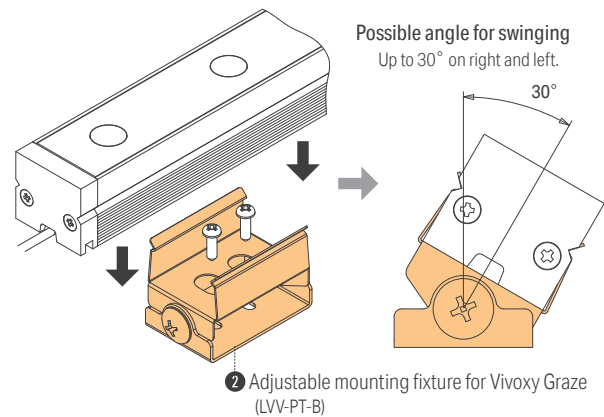

Fall prevention mounting fixture installation

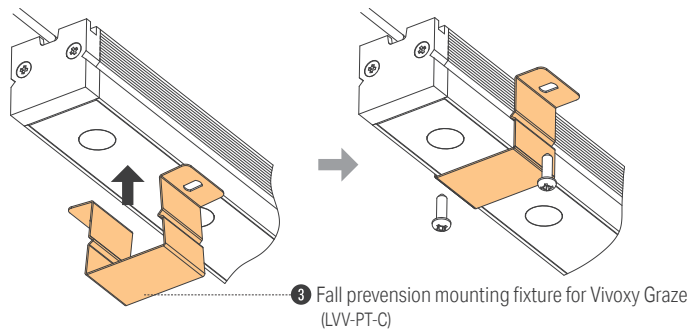


Connecting to the power supply

- Use appropriate constant current driver according to the length of the LED fixtures.
- Do not split the circuit of LED fixtures into multiple from the driver.
- Connect the RED power supply cable to + (plus) of the driver and the BLACK power supply cable to - (minus) of the driver.
- Use an appropriate signal cable and install it according to the instructions caution of the signal cable installation.

Caution: Ensure that power of drivers is off during connecting the LED fixtures. After confirming that LED fixtures are connected to the driver properly before turning on the main switch.


Polarity reversal or wrong procedure of connection, the LED fixture will be damaged due to a high inrush current.

If the driver was turned on before connecting the LED fixtures, turn off the power and wait one or more minutes according to the manual of the driver for releasing the accumulated electricity inside the driver.

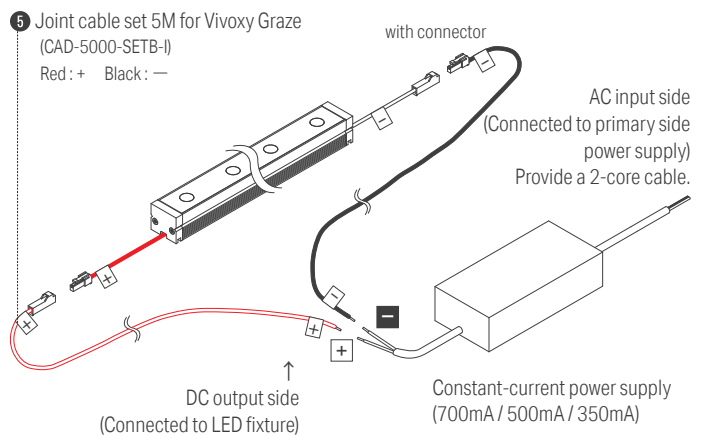

System configuration diagram

- Max. connectable length depends on the wattage and output voltage range of the power supply.
- Max. length per circuit of Luci Vivoxo Graze is,
2.7 m @ 700 mA
4.2 m @ 500 mA
6.0 m @ 350 mA
L22 2.4m@700mA
3.6m@500mA
5.4m@350mA

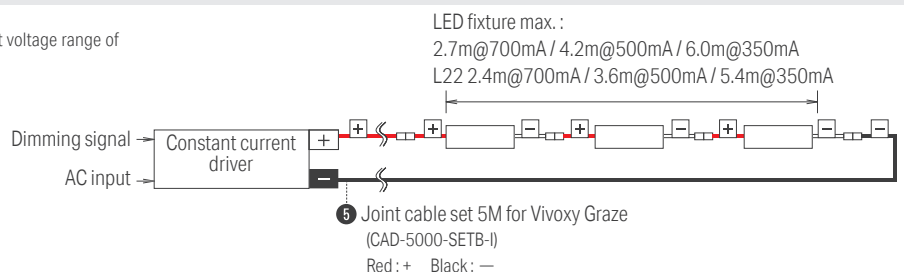

Min. and Max. length per run for Meanwell HVGC series

* A:ON/OFF, B:0-10V dimming type

Rated current	Meanwell Model No.	Rated wattage	Constant current region	Connectable length range of LVV50
700mA	HVGC-65-700-*	65W	9-93V	0.3-1.2m (L22: 0.3-0.9m)
	HVGC-100-700-*	100W	15-142V	0.6-1.8m (L22: 0.6-1.5m)
	HVGC-150-700-*	150W	21-215V	0.6-2.7m (L22: 0.6-2.4m)
500mA	HVGC-65-500-*	65W	13-130V	0.6-1.8m (L22: 0.3-1.5m)
	HVGC-150-500-*	150W	30-300V	0.9-4.2m (L22: 0.9-3.6m)
350mA	HVGC-65-350-*	65W	18-186V	0.6-2.4m (L22: 0.6-2.1m)
	HVGC-100-350-*	100W	29-285V	0.9-3.9m (L22: 0.9-3.6m)
	HVGC-150-350-*	150W	42-428V	1.2-6.0m (L22: 1.2-5.4m)

Guide for selecting constant current driver

- 1) The minimum and maximum voltage of LED fixture must be within the output voltage range of the constant current driver.
 2) The total wattage of LED fixture including 80% load*1 must not exceed the wattage capacity of the constant current driver.
 Please contact us when you have any questions for selecting the constant current driver.
 Please follow instructions for the power supply and confirm the operation environment conditions including temperature and humidity.
 Specifications and price are subject to change without prior notification.

Example:	1) Voltage range		2) Power consumption	Connectable or not
C.C driver	Constant Current Region of driver		Rated power of driver 150W	
L300mm	21V	215V	Wattage (inc. 80% load)	
L300mm	12V	22V	15W	
L600mm	25V	43V	29W	
L1800mm	75V	130V	88W	
L2700mm	112V	194V	132W	
L3000mm	125V	216V	147W	
L3300mm	137V	238V	162W	

Min and Max voltage of LED fixture and power consumption (N, W, WW, L30, L27)

Rated input current	700mA				500mA				300mA			
Fitting length per run (mm)	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Typ)*80% load *1	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Max)* 80% load	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Max)* 80% load
300	12V	22V	12W	15W	12V	21V	8W	10W	12V	21V	6W	7W
600	25V	43V	24W	29W	24V	42V	17W	21W	24V	42V	11W	14W
900	37V	65V	35W	44W	37V	64V	25W	31W	36V	63V	17W	21W
1200	50V	86V	47W	59W	49V	85V	33W	41W	48V	84V	23W	28W
1500	62V	108V	59W	74W	61V	106V	41W	52W	60V	104V	28W	35W
1800	75V	130V	71W	88W	73V	127V	50W	62W	72V	125V	34W	43W
2100	87V	151V	82W	103W	86V	149V	58W	72W	84V	146V	40W	50W
2400	100V	173V	94W	118W	98V	170V	66W	83W	96V	167V	45W	57W
2700	112V	194V	106W	132W	110V	191V	74W	93W	108V	188V	51W	64W
3000	125V	216V	118W	147W	122V	212V	83W	103W	120V	209V	57W	71W
3300	137V	238V	129W	162W	135V	234V	91W	113W	132V	230V	62W	78W
3600	150V	259V	141W	176W	147V	255V	99W	124W	144V	251V	68W	85W
3900	162V	281V	153W	191W	159V	276V	107W	134W	156V	271V	74W	92W
4200	175V	302V	165W	206W	171V	297V	116W	144W	168V	292V	79W	99W
4500	187V	324V	176W	221W	184V	319V	124W	155W	180V	313V	85W	106W
4800	200V	346V	188W	235W	196V	340V	132W	165W	192V	334V	91W	113W
5100	212V	367V	200W	250W	208V	361V	140W	175W	204V	355V	96W	120W
5400	225V	389V	212W	265W	220V	382V	149W	186W	216V	376V	102W	128W
5700	237V	410V	223W	279W	233V	404V	157W	196W	228V	397V	108W	135W
6000	250V	432V	235W	294W	245V	425V	165W	206W	240V	418V	113W	142W

Min and Max voltage of LED fixture and power consumption (L22)

Rated input current	700mA				500mA				300mA			
Fitting length per run (mm)	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Typ)*80% load *1	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Max)* 80% load	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Max)* 80% load
300	13V	24V	13W	16W	13V	24V	9W	11W	12V	23V	6W	8W
600	26V	49V	26W	32W	26V	48V	18W	23W	25V	47V	12W	15W
900	40V	73V	38W	48W	39V	72V	27W	34W	37V	70V	18W	23W
1200	53V	98V	51W	64W	52V	96V	36W	45W	50V	94V	24W	30W
1500	66V	122V	64W	80W	65V	121V	45W	56W	62V	117V	30W	38W
1800	79V	147V	77W	96W	78V	145V	54W	68W	75V	140V	37W	46W
2100	92V	171V	90W	112W	91V	169V	63W	79W	87V	164V	43W	53W
2400	106V	196V	102W	128W	104V	193V	72W	90W	100V	187V	49W	61W
2700	119V	220V	115W	144W	117V	217V	81W	101W	112V	211V	55W	69W
3000	132V	245V	128W	160W	130V	241V	90W	113W	125V	234V	61W	76W
3300	145V	269V	141W	176W	143V	265V	99W	124W	137V	257V	67W	84W
3600	158V	294V	154W	192W	156V	289V	108W	135W	150V	281V	73W	91W
3900	172V	318V	167W	208W	168V	314V	117W	146W	162V	304V	79W	99W
4200	185V	343V	179W	224W	181V	338V	126W	158W	175V	328V	85W	107W
4500	198V	367V	192W	240W	194V	362V	135W	169W	187V	351V	91W	114W
4800	211V	392V	205W	256W	207V	386V	144W	180W	200V	374V	97W	122W
5100	224V	416V	218W	272W	220V	410V	153W	191W	212V	398V	104W	129W
5400	238V	441V	231W	288W	233V	434V	162W	203W	225V	421V	110W	137W
5700	251V	465V	243W	304W	246V	458V	171W	214W	237V	445V	116W	145W
6000	264V	490V	256W	320W	259V	482V	180W	225W	250V	468V	122W	152W


Vivoxo Graze

Illuminance data

700mA


LVV50-1200-N-SP-I

Light source color 4000K
Brightness 8827 cd
Luminous flux 5034 lm
Color rendering index Ra 90




LVV50-1200-W-SP-I

Light source color 4000K
Brightness 8721 cd
Luminous flux 4978 lm
Color rendering index Ra 92




LVV50-1200-WW-SP-I

Light source color 3500K
Brightness 8157 cd
Luminous flux 4652 lm
Color rendering index Ra 92




LVV50-1200-L30-SP-I

Light source color 3000K
Brightness 7335 cd
Luminous flux 4183 lm
Color rendering index Ra 92



LVV50-1200-L27-SP-I


Light source color 2700K
Brightness 6877 cd
Luminous flux 3922 lm
Color rendering index Ra 94



500mA


LVV50-1200-N-SP-I

Light source color 4000K
Brightness 6605 cd
Luminous flux 3769 lm
Color rendering index Ra 90




LVV50-1200-W-SP-I

Light source color 4000K
Brightness 6531 cd
Luminous flux 3727 lm
Color rendering index Ra 92




LVV50-1200-WW-SP-I

Light source color 3500K
Brightness 6401 cd
Luminous flux 3483 lm
Color rendering index Ra 92




LVV50-1200-L30-SP-I

Light source color 3000K
Brightness 5488 cd
Luminous flux 3132 lm
Color rendering index Ra 92





LVV50-1200-L27-SP-I

Light source color 2700K
Brightness 5146 cd
Luminous flux 2936 lm
Color rendering index Ra 94



Recommend dimensions and illumination distributions


CH=5000 700mA

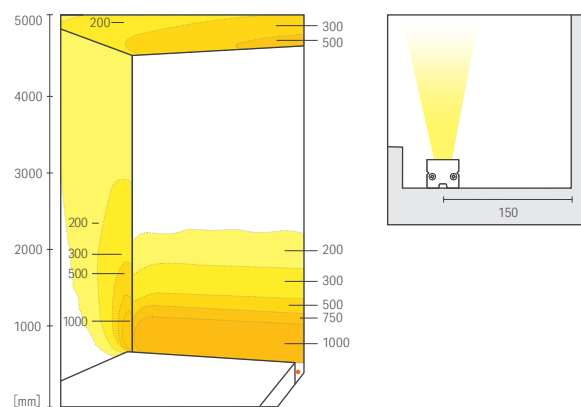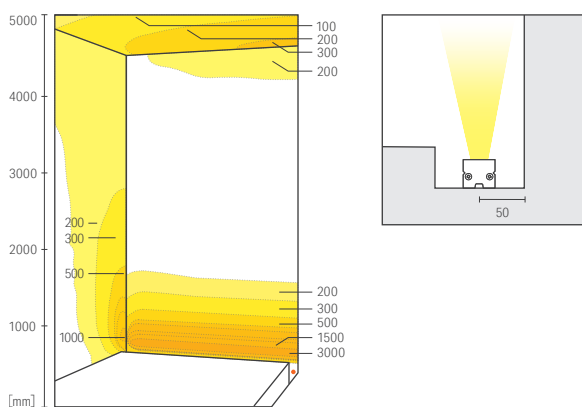

350mA


LVV50-1200-N-SP-I

Light source color 4000K
Brightness 4773 cd
Luminous flux 1355 lm
Color rendering index Ra 90




LVV50-1200-W-SP-I

Light source color 4000K
Brightness 4720 cd
Luminous flux 2679 lm
Color rendering index Ra 92




LVV50-1200-WW-SP-I

Light source color 3500K
Brightness 4411 cd
Luminous flux 2504 lm
Color rendering index Ra 92




LVV50-1200-L30-SP-I

Light source color 3000K
Brightness 3966 cd
Luminous flux 2251 lm
Color rendering index Ra 92



LVV50-1200-L27-SP-I

Light source color 2700K
Brightness 3179 cd
Luminous flux 2111 lm
Color rendering index Ra 94



















Distance from wall

700mA

500mA

350mA




Luci Vivoxy Graze THOF

LVVTH NEW



SHIBUYA363 SHIMIZU-BLDG
Location: Japan
Architect office: Tokyu Architects & Engineers INC.

Lighting Design: Tokyo Lighting Design LLC
Construction: Tokyu Construction
Photo: Daisuke Yano

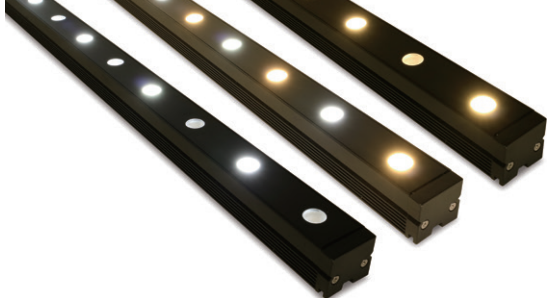

Luci Vivoxo Graze THOF

Tunable wall grazer light to beautifully accentuate wall elements.
2 CCT LEDs assembled alternately in your choice of combination.
Selectable brightness by choosing output of constant current driver.

Specifications

Dimensions

Cross section W 27 x H 24 mm
Length 4 types of fixed length

1200	900
600	300


Electrical & Output

@700mA, @ NL27

Color temperature	N 100%	N 100% / L27 100%	L27 100%
Power Consumption (W/m)	20	38.9	20
Luminous flux (lm/m)	2068	3655	1654

* Please refer to the datasheet page for power, CCT and input current for every product length.
* Required dimmable constant current driver by 0-10V 2ch, Dali DT6/8.

Color temperature

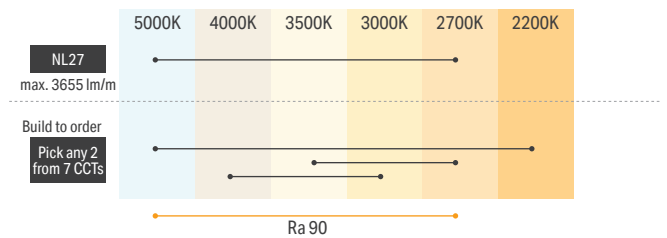

Accessories


Adjustable mounting fixture



Louver



Optics

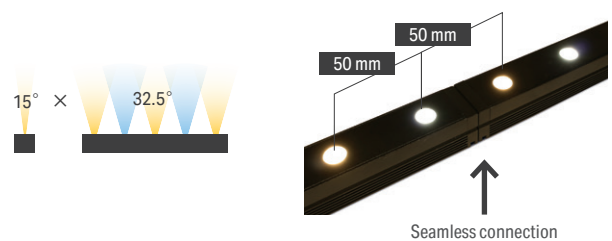

TIPS - Recommended distance

Distance from wall

	D=0mm	D=50mm	D=80mm	D=100mm
W: 100%				
W: 100% L:100%				
L: 100%				

Indoor

Rigid light

LVTTH

Vivoxo Graze

Vivoxo Graze THOF®

RECTA

THOF®

Creide® F / lens

silux® K

silux wide® K

nano line

Color management
MacAdam



- For grazing light with spread lens 15° x 32° with High CRI LED
- 3 different brightness by choosing 350mA, 500mA or 700mA C.C driver
- Adjustable bracket and louver is available

Model No.

LVVTH50 - - NL27 - SP - I

Product Name / LED pitch	Length	Light source color	Beam angle	Environment
LVVTH50 : 50mm pitch	0300 0600 0900 1200	NL27 : Natural white to Warm white 2700K	SP: 15° x 32.5°	I : Indoors

Light Intensity Refer to P.110



Specification

Length	0300			0600			0900			1200		
Model No.	LVVTH50-0300-NL27-SP-I			LVVTH50-0600-NL27-SP-I			LVVTH50-0900-NL27SP-I			LVVTH50-1200-NL27-SP-I		
Rated input current	700mA	500mA	350mA	700mA	500mA	350mA	700mA	500mA	350mA	700mA	500mA	350mA
Power Consumption 2ch max(@typ)	12W	8W	6W	24W	17W	11W	35W	25W	17W	47W	33W	23W
Power Consumption 1ch max(@typ)	6W	5W	3W	12W	9W	6W	18W	13W	9W	24W	17W	12W
Fitting length (L)	300mm			600mm			900mm			1200mm		
Weight	180g			360g			540g			720g		
Luminaire efficacy(2700K)	82.7 lm/W@700mA			82.7 lm/W@700mA			82.7 lm/W@700mA			82.7 lm/W@700mA		
Light source color	○ = Device inventory * = Equivalent											
NL27 5000K~2700K	○	○	○	○	○	○	○	○	○	○	○	○
Dimming rate												
N 100%, L27 0% Ra90	620lm	474lm	332lm	1241lm	948lm	664lm	1861lm	1422lm	995lm	2481lm	1896lm	1327lm
N 100%, L27 100% Ra92	1097lm	844lm	591lm	2193lm	1688lm	1182lm	3290lm	2533lm	1773lm	4386lm	3377lm	2364lm
N 0%, L27 100% Ra92	496lm	381lm	267lm	992lm	762lm	534lm	1489lm	1143lm	800lm	1985lm	1525lm	1067lm


Specification may be subject to change without announcement. The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input current	700mA	500mA	350mA
LED beam angle	15°x32.5°		
Environment	Indoors (no condensation)		
Max. length per run*	5.7m	8.4m	12m
Material (body)	Aluminum(black), Polycarbonate		
Attachments	① Mounting fixture 2pcs		
Option parts	① Mounting fixture ② Adjustable mounting fixture ③ Fall prevention mounting fixture ④ Louver ⑤ Joint cable		
Certification	CE		
Dimmable	Yes (0-10V, DALI)		
Power Supplies	Constant current driver is required.		

* The connectable number of luminaires depends on the output voltage of the driver used. Check the instructions in the driver manual.

External dimensions

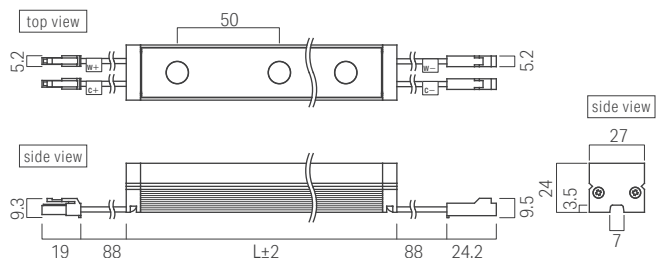


Min. and Max. length per run for Meanwell HVGC series

* A: ON/OFF, B: 0~10V dimming type

Rated current	Meanwell Model No.	Rated wattage	Constant current region	Connectable length range of LVVTH50
700mA	HVGC-65-700- * × 2pcs	65W	9-93V	0.6-2.4m
	HVGC-100-700- * × 2pcs	100W	15-142V	0.9-3.9m
	HVGC-150-700- * × 2pcs	150W	21-215V	1.2-5.7m
500mA	HVGC-65-500- * × 2pcs	65W	13-130V	0.9-3.6m
	HVGC-150-500- * × 2pcs	150W	30-300V	1.5-8.4m
350mA	HVGC-65-350- * × 2pcs	65W	18-186V	0.9-5.1m
	HVGC-100-350- * × 2pcs	100W	29-285V	1.5-8.1m
	HVGC-150-350- * × 2pcs	150W	42-428V	2.1-12.0m

Cross sectional view

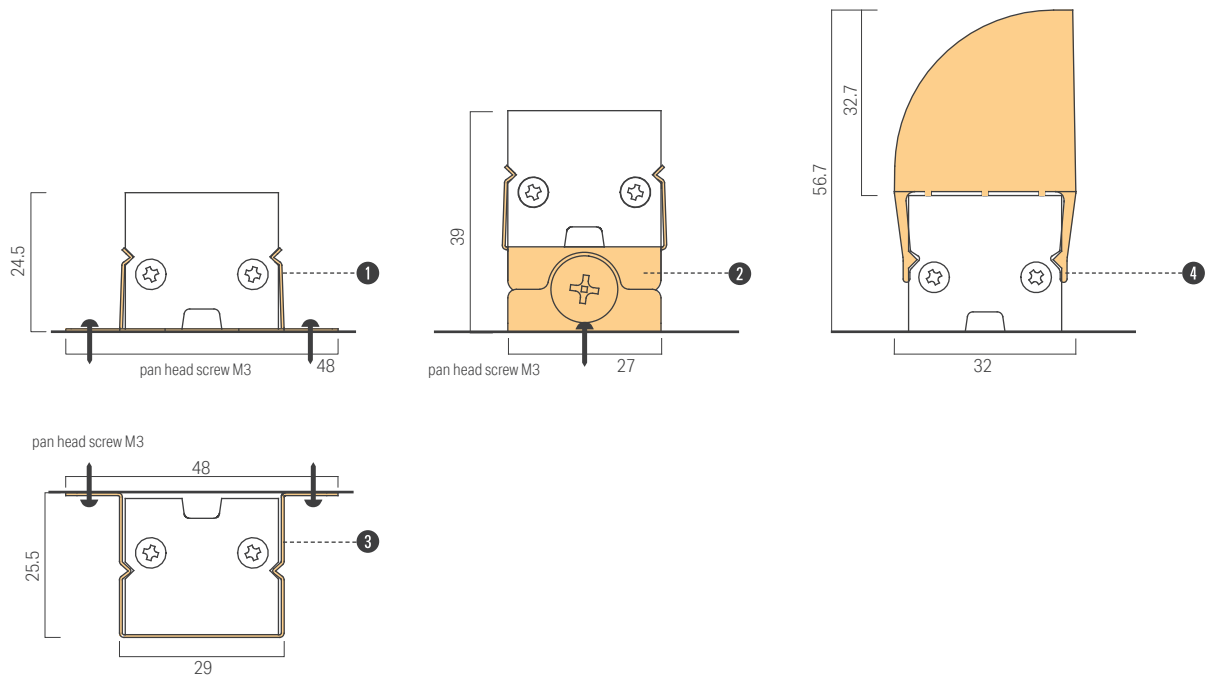


Option parts



- ### 1 Mounting fixture for Vivoxy Graze Attachment

Model No : LVV-PT-A
Attached with LED fixture
2 pcs per LED fixture

For extra order
1 pc / bag




- 2 Adjustable mounting fixture for Vivoxy Graze

Model No : LVV-PT-B

1 pc/bag

2 pcs per LED fixture is recommended.

For tilting installation





- ### 3 Fall prevention mounting fixture for Vivoxy Graze

Model No : LVV-PT-C

1 pcs/1 bag

2 pcs per LED fixture is recommended.

For downward installation




- 5 Joint cable set 5M for Vivoxy Graze **Required**

Model No : CAD-5000-SETB-I

1 pc per circuit for connecting the LED fixture to power supply or dimmer driver.

Red : + , Black : -

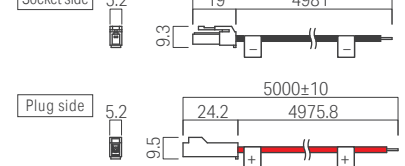


- #### 4 Louver for Vivoxy Graze

Model No : LVV50-LV0150

150mm×2 pcs / set

1 set for each 300mm LED fixture.


A dedicated louver can be installed on Luci Vivoxy Graze. Direct glare in a parallel or vertical direction against the lighting apparatus can be prevented.

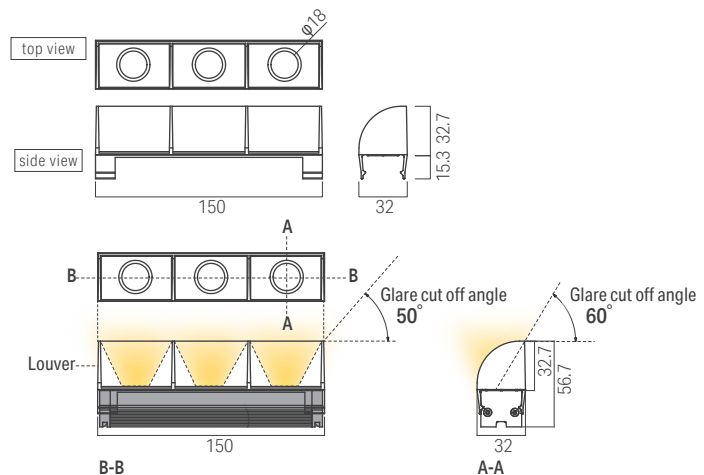


Vivoxo Graze THOF®

Installing the product


Mounting fixture installation

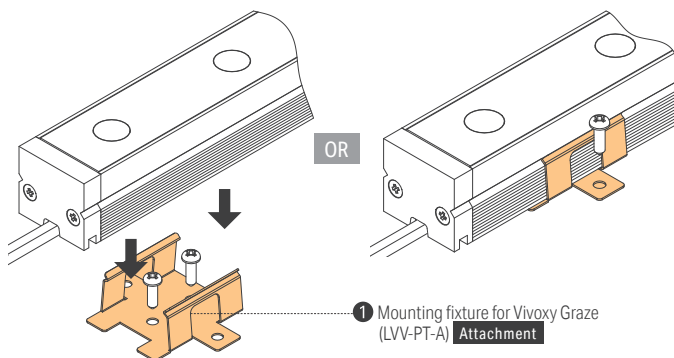

Adjustable fixture installation

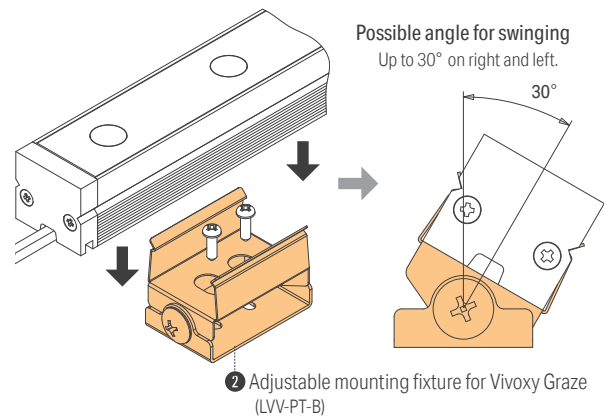

Fall prevention mounting fixture installation

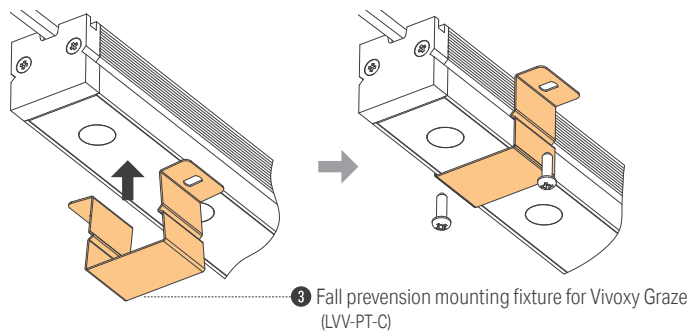


Connecting to the power supply

- Use appropriate constant current driver according to the length of the LED fixtures.
- Do not split the circuit of LED fixtures into multiple from the driver.
- Connect the RED power supply cable to + (plus) of the driver and the BLACK power supply cable to - (minus) of the driver.
- Use an appropriate signal cable and install it according to the instructions caution of the signal cable installation.

Caution: Ensure that power of drivers is off during connecting the LED fixtures. After confirming that LED fixtures are connected to the driver properly before turning on the main switch.

Polarity reversal or wrong procedure of connection, the LED fixture will be damaged due to a high inrush current.


If the driver was turned on before connecting the LED fixtures, turn off the power and wait one or more minutes according to the manual of the driver for releasing the accumulated electricity inside the driver.

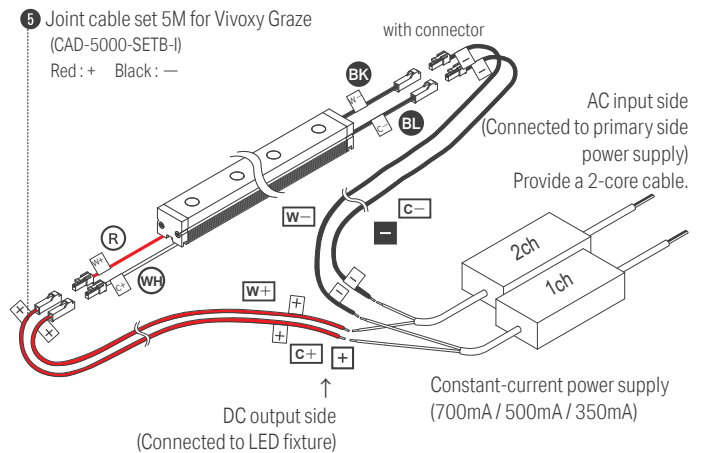

System configuration diagram

- Max. connectable length depends on the wattage and output voltage range of the power supply.

- Max. length per circuit of Luci Vivoxo Graze is,
5.7 m @ 700 mA
8.4 m @ 500 mA
12 m @ 350 mA

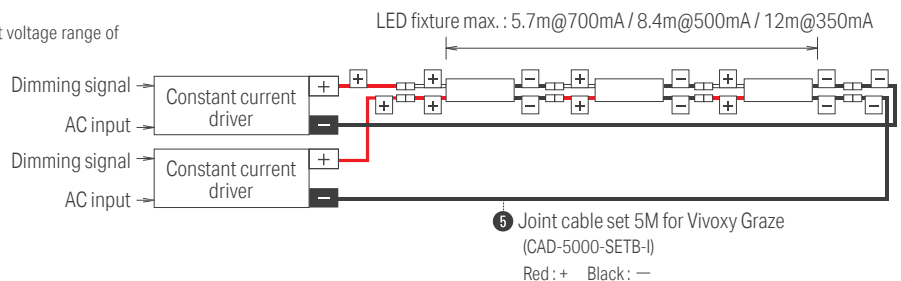

Min. and Max. length per run for Meanwell HVGC series

* A: ON/OFF, B: 0~10V dimming type

Rated current	Meanwell Model No.	Rated wattage	Constant current region	Connectable length range of LVVTH50
700mA	HVGC-65-700- * × 2pcs	65W	9-93V	0.6-2.4m
	HVGC-100-700- * × 2pcs	100W	15-142V	0.9-3.9m
	HVGC-150-700- * × 2pcs	150W	21-215V	1.2-5.7m
500mA	HVGC-65-500- * × 2pcs	65W	13-130V	0.9-3.6m
	HVGC-150-500- * × 2pcs	150W	30-300V	1.5-8.4m
350mA	HVGC-65-350- * × 2pcs	65W	18-186V	0.9-5.1m
	HVGC-100-350- * × 2pcs	100W	29-285V	1.5-8.1m
	HVGC-150-350- * × 2pcs	150W	42-428V	2.1-12.0m

Guide for selecting constant current driver


- 1) The minimum and maximum voltage of LED fixture must be within the output voltage range of the constant current driver per channel.
 - 2) The total wattage of LED fixture including 80% load*1 must not exceed the wattage capacity of the constant current driver.
- Please contact us when you have any questions for selecting the constant current driver.
Please follow instructions for the power supply and confirm the operation environment conditions including temperature and humidity.
Specifications and price are subject to change without prior notification.

Min and Max voltage of LED fixture and power consumption at 1ch (1CCT LED)

Rated input current	700mA				500mA				300mA			
Fitting length per run (mm)	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Typ)* 80% load *1	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Max)* 80% load	Min. Voltage	Max. Voltage	Power consumption (@Typ)	Power consumption (@Max)* 80% load
300	6V	11V	6W	7W	6V	11V	4W	5W	6V	10V	3W	4W
600	12V	22V	12W	15W	12V	21V	8W	10W	12V	21V	6W	7W
900	19V	32V	18W	22W	18V	32V	12W	15W	18V	31V	9W	11W
1200	25V	43V	24W	29W	24V	42V	17W	21W	24V	42V	11W	14W
1500	31V	54V	29W	37W	31V	53V	21W	26W	30V	52V	14W	18W
1800	37V	65V	35W	44W	37V	64V	25W	31W	36V	63V	17W	21W
2100	44V	76V	41W	51W	43V	74V	29W	36W	42V	73V	20W	25W
2400	50V	86V	47W	59W	49V	85V	33W	41W	48V	84V	23W	28W
2700	56V	97V	53W	66W	55V	96V	37W	46W	54V	94V	26W	32W
3000	62V	108V	59W	74W	61V	106V	41W	52W	60V	104V	28W	35W
3300	69V	119V	65W	81W	67V	117V	45W	57W	66V	115V	31W	39W
3600	75V	130V	71W	88W	73V	127V	50W	62W	72V	125V	34W	43W
3900	81V	140V	76W	96W	80V	138V	54W	67W	78V	136V	37W	46W
4200	87V	151V	82W	103W	86V	149V	58W	72W	84V	146V	40W	50W
4500	94V	162V	88W	110W	92V	159V	62W	77W	90V	157V	43W	53W
4800	100V	173V	94W	118W	98V	170V	66W	83W	96V	167V	45W	57W
5100	106V	184V	100W	125W	104V	181V	70W	88W	102V	177V	48W	60W
5400	112V	194V	106W	132W	110V	191V	74W	93W	108V	188V	51W	64W
5700	119V	205V	112W	140W	116V	202V	78W	98W	114V	198V	54W	67W
6000	125V	216V	118W	147W	122V	212V	83W	103W	120V	209V	57W	71W
6300	131V	227V	123W	154W	129V	223V	87W	108W	126V	219V	60W	74W
6600	137V	238V	129W	162W	135V	234V	91W	113W	132V	230V	62W	78W
6900	144V	248V	135W	169W	141V	244V	95W	119W	138V	240V	65W	82W
7200	150V	259V	141W	176W	147V	255V	99W	124W	144V	251V	68W	85W
7500	156V	270V	147W	184W	153V	266V	103W	129W	150V	261V	71W	89W
7800	162V	281V	153W	191W	159V	276V	107W	134W	156V	271V	74W	92W
8100	168V	292V	159W	198W	165V	287V	111W	139W	162V	282V	77W	96W
8400	175V	302V	165W	206W	171V	297V	116W	144W	168V	292V	79W	99W
8700	181V	313V	171W	213W	177V	308V	120W	150W	174V	303V	82W	103W
9000	187V	324V	176W	221W	184V	319V	124W	155W	180V	313V	85W	106W
9300	193V	335V	182W	228W	190V	329V	128W	160W	186V	324V	88W	110W
9600	200V	346V	188W	235W	196V	340V	132W	165W	192V	334V	91W	113W
9900	206V	356V	194W	243W	202V	350V	136W	170W	198V	345V	94W	117W
10200	212V	367V	200W	250W	208V	361V	140W	175W	204V	355V	96W	120W
10500	218V	378V	206W	257W	214V	372V	144W	180W	210V	365V	99W	124W
10800	225V	389V	212W	265W	220V	382V	149W	186W	216V	376V	102W	128W
11100	231V	400V	218W	272W	226V	393V	153W	191W	222V	386V	105W	131W
11400	237V	410V	223W	279W	233V	404V	157W	196W	228V	397V	108W	135W
11700	243V	421V	229W	287W	239V	414V	161W	201W	234V	407V	111W	138W
12000	250V	432V	235W	294W	245V	425V	165W	206W	240V	418V	113W	142W
12300	256V	443V	241W	301W	251V	435V	169W	211W	246V	428V	116W	145W

*Please contact our sales if L22(2200K) LED is the one of CCTs of the LED fixture. The connectable length is shorter than above table.

System configuration diagram

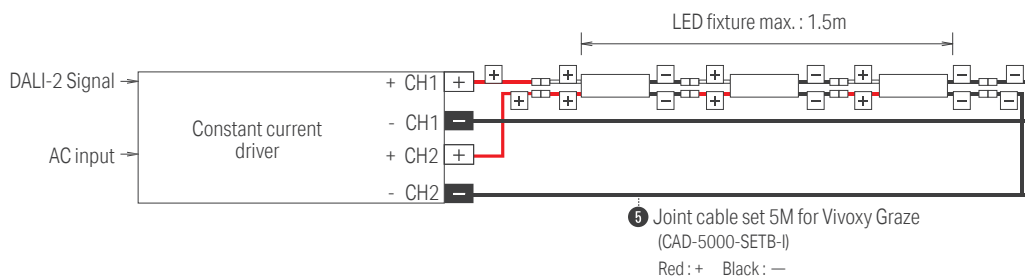

Min and Max. length per run for eldoLED DL0560A 2ch, 150-1400mA,DALI-2 DT6)

Rated Current	eldoLED Model No.	Rated wattage	Constant Current region	Connectable length range of LVVTH50
700mA	DL0560A-700mA	50W	2-55V	0.3-1.5m
500mA	DL0560A-500mA	50W	2-55V	0.3-1.5m
350mA	DL0560A-350mA	50W	2-55V	0.3-1.5m


Max brightness when using this driver will be about half of its specification.

Illuminance data

700mA


LVVTH50-1200-NL27-SP-I

Light source color 5000K
N:100%, L27:0%
Brightness 4344 cd
Luminous flux 2482 lm
Color rendering index Ra 90




LVVTH50-1200-NL27-SP-I

Light source color -
N:100%, L27:100%
Brightness 7700 cd
Luminous flux 4387 lm
Color rendering index Ra 92



LVVTH50-1200-NL27-SP-I


Light source color 2700K
N:0%, L27:100%
Brightness 3539 cd
Luminous flux 1985 lm
Color rendering index Ra 93



500mA


LVVTH50-1200-NL27-SP-I

Light source color 5000K
N:100%, L27:0%
Brightness 3305 cd
Luminous flux 1896 lm
Color rendering index Ra 90




LVVTH50-1200-NL27-SP-I

Light source color -
N:100%, L27:100%
Brightness 5926 cd
Luminous flux 3377 lm
Color rendering index Ra 94




LVVTH50-1200-NL27-SP-I

Light source color 2700K
N:0%, L27:100%
Brightness 2710 cd
Luminous flux 1525 lm
Color rendering index Ra 93




350mA


LVVTH50-1200-NL27-SP-I
Light source color 5000K
N:100%, L27:0%
Brightness 2313 cd
Luminous flux 1328 lm
Color rendering index Ra 90



LVVTH50-1200-NL27-SP-I
Light source color -
N:100%, L27:100%
Brightness 4148 cd
Luminous flux 2364 lm
Color rendering index Ra 93



LVVTH50-1200-NL27-SP-I
Light source color 2700K
N:0%, L27:100%
Brightness 1897 cd
Luminous flux 1068 lm
Color rendering index Ra 93





KOHNAN SHOJI CO., LTD
Location: Japan



THE WESTIN AWAJI ISLAND RESORT & CONFERENCE CENTER repair work
Location: Japan
Architect office: J.FRONT DESIGN & CONSTRUCTION Co.,Ltd.
Lighting design: KOIZUMI LIGHTING TECHNOLOGY CORP.
Construction: J.FRONT DESIGN & CONSTRUCTION Co.,Ltd.

Luci RECTA

Intense brightness for powerful cove lighting
as well as ambient lighting,
3 side emission simple design
for clean minimalist applications


Specifications

Dimensions

Cross section W 24 x H 39 mm
Standard length 3 types of fixed length
Custom order 7 types of fixed length with MOQ

1003	907			
806	705	604		
503	407	306	205	103


Color temperature




Electrical & Output

Power Consumption (W/m)	31.2	*Available for 20.8W/m type on request
Luminous flux @ 3000K (lm/m)	2226	


Light distribution




Features

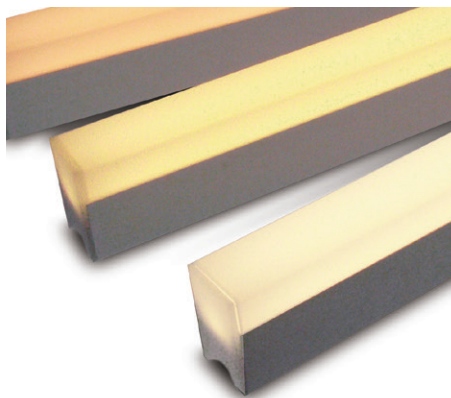

Squared section with uniform and homogenous
3 side emitted surface

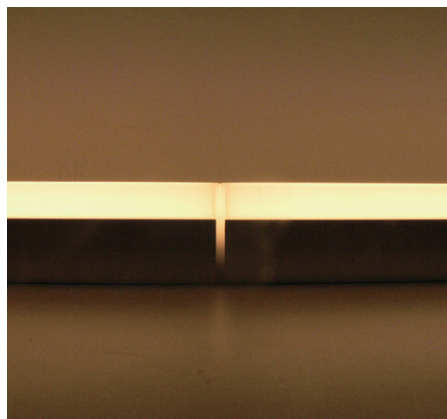


Seamless lighting at the joint
Neither clips nor cable can be seen

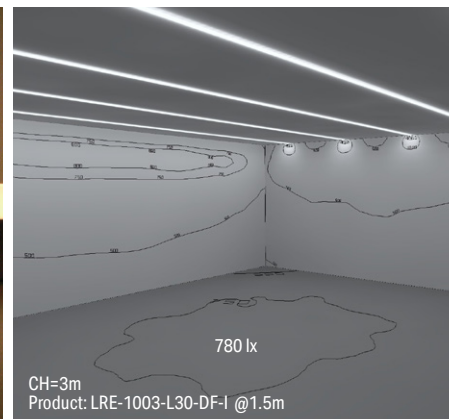

Give enough brightness
for workspace with simple and stylish design

Project reference

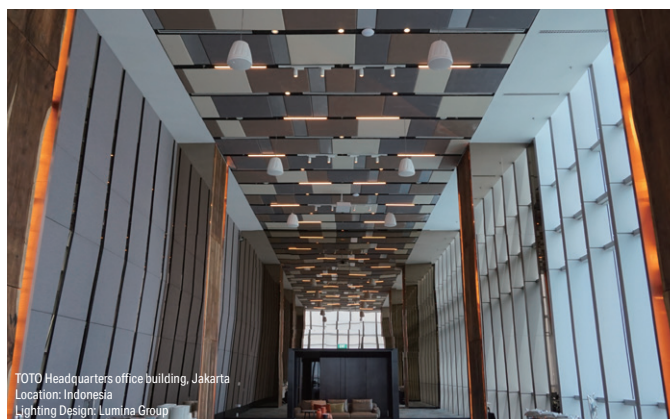

LRE

Color management
MacAdam 3 step



3 years
warranty




- Over 2,000 lm/m output for surface mount and indirect lighting
- Seamless and homogeneous 3 surface-emitting light

Model No.

LRE - - - **DF** - **I**

Product Name	Length	Light source color	Cover Type	Environment
LRE	0103 0503 1003	N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K	DF : Diffuser	I : Indoors

Light Intensity Refer to P.117



Specification

Length	0103	0503	1003
Model No.	LRE-0103-□-DF-I	LRE-0503-□-DF-I	LRE-1003-□-DF-I
Power consumption	3.1W	15.6W	31.2W
Fitting length(L)	103mm	503mm	1003mm
Weight	50g	220g	420g
Luminaire efficacy(2700K)	74.7 lm/W	74.7 lm/W	74.7 lm/W
Light source color	○ = Device inventory		
D 7100K	-	-	-
N 5000K Ra92	○ 238lm	○ 1190lm	○ 2380lm
W 4000K Ra92	○ 238lm	○ 1190lm	○ 2380lm
WW 3500K Ra93	○ 230lm	○ 1151lm	○ 2303lm
L30 3000K Ra94	○ 222lm	○ 1113lm	○ 2226lm
L27 2700K Ra93	○ 215lm	○ 1075lm	○ 2150lm
L24 2400K Ra93	○ 199lm	○ 998lm	○ 1996lm
L19 1900K	-	-	-

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

Custom length


Length	0205	0306	0407	0604	0705	0806	0907
Model No.	LRE-0205-□-DF-I	LRE-0306-□-DF-I	LRE-0407-□-DF-I	LRE-0604-□-DF-I	LRE-0705-□-DF-I	LRE-0806-□-DF-I	LRE-0907-□-DF-I
Power consumption	6.2W	9.3W	12.5W	18.7W	21.8W	24.9W	28.0W
Fitting length(L)	205mm	306mm	407mm	604mm	705mm	806mm	907mm

Please contact us since it is made-to-order products and has MOQ.

General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length per circuit	3.3m
Material (body)	Polycarbonate, Aluminum
Attachments	① Mounting parts 2pcs
Option parts	① Mounting parts ② Power supply cable ③ Joint cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required


External dimensions

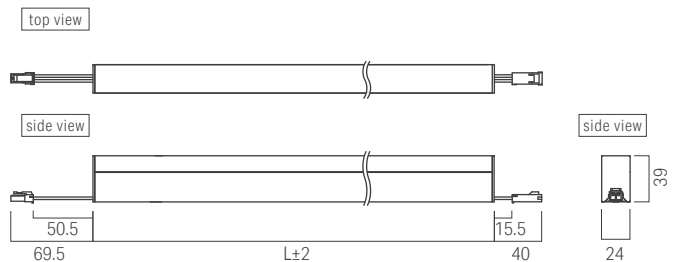

Max. connectable length per power supply

Length of LED fixture (70% loading factor) During dimmer use	Power supply
~1.1m	50W power supply
~2.2m	100W power supply
~3.3m	150W power supply

Cross sectional view

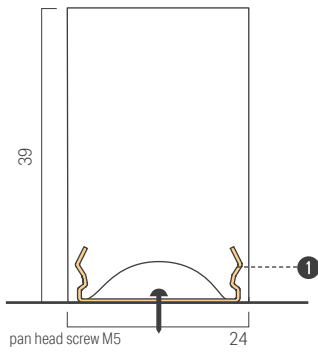


Option parts

1 Mounting parts A Attachment



Model No : LTH-PTA
Attached with LED fixture
2 pcs / bag


For extra order
2 pcs / bag



2 Power supply cable 3M




Model No : CAD-3000-MCNN-I
1 pc per circuit for connecting the LED fixture
to power supply or dimmer driver.



3 Joint cable 1M




Model No : CAD-1000-MCFC-I
Joint cable between two LED fixtures



Installing the product

For horizontal installation

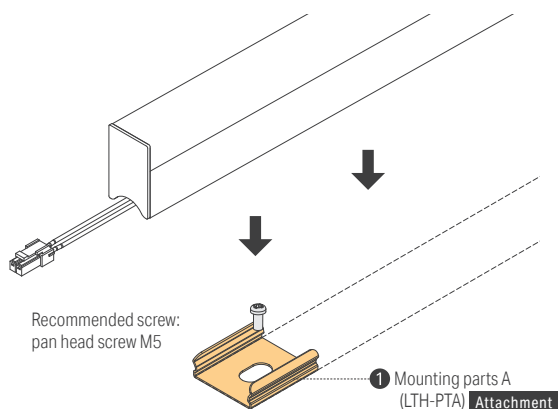


⚠ Cautions

- Do not recess the LED fixture on the wall without any clearance or heat dissipation for releasing the heat of the LED fixture.


- To avoid the mounting parts being deformed, DO NOT over-screw the screws, use countersunk screw and install the LED fixture forcefully when the mounting parts are misaligned.

When using deformed Mounting parts, the LED fixture may drop from the Mounting parts. Make sure the LED fixture is fixed tightly after installation.

For vertical installation

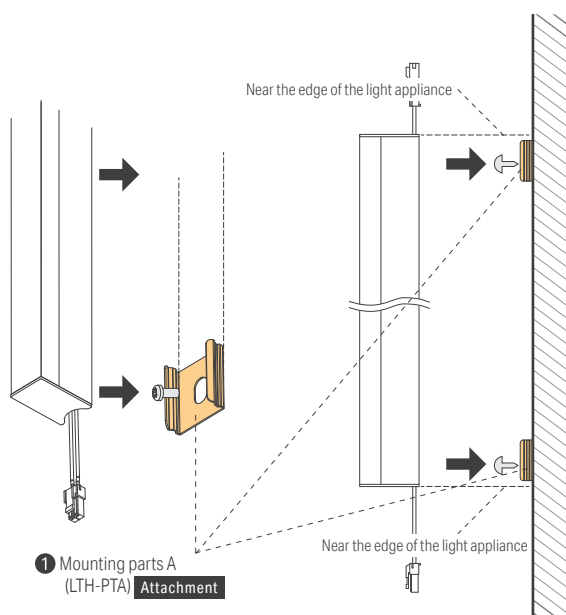

System configuration diagram

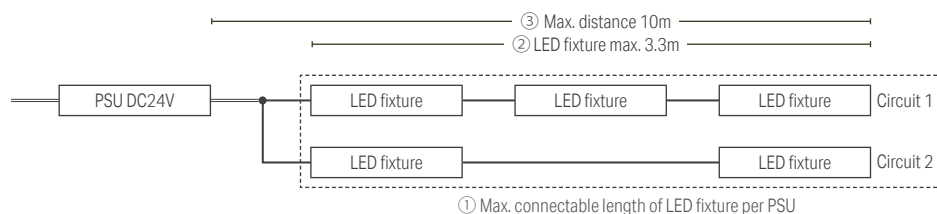


① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)

② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.

③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Illuminance data



LRE Luci RECTA


Color temperature

5000K 4000K 3500K 3000K 2700K 2400K

Direct horizontal surface light intensity distribution chart


LRE-1003-N-DF-I

Light source color 5000K
Brightness 468 cd
Luminous flux 2380 lm
Color rendering index Ra 92




LRE-1003-W-DF-I

Light source color 4000K
Brightness 468 cd
Luminous flux 2380 lm
Color rendering index Ra 92




LRE-1003-WW-DF-I

Light source color 3500K
Brightness 453 cd
Luminous flux 2303 lm
Color rendering index Ra 93




LRE-1003-L30-DF-I

Light source color 3000K
Brightness 438 cd
Luminous flux 2226 lm
Color rendering index Ra 94




LRE-1003-L27-DF-I

Light source color 2700K
Brightness 423 cd
Luminous flux 2150 lm
Color rendering index Ra 93




LRE-1003-L24-DF-I

Light source color 2400K
Brightness 393 cd
Luminous flux 1996 lm
Color rendering index Ra 93




Recommend dimensions and illumination distributions


Cornice lighting-1 CH=2800

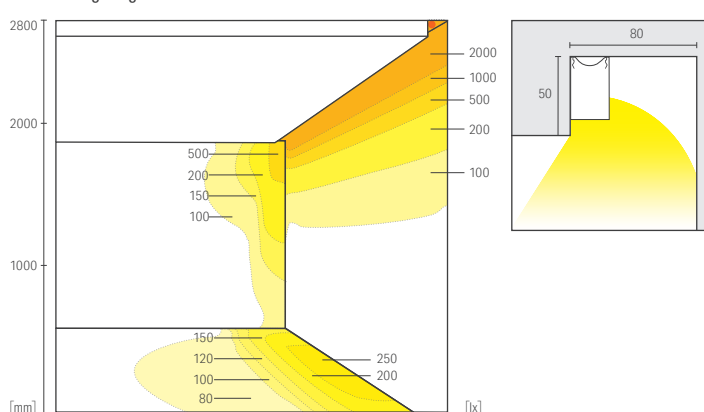

Cornice lighting-2 CH=2800

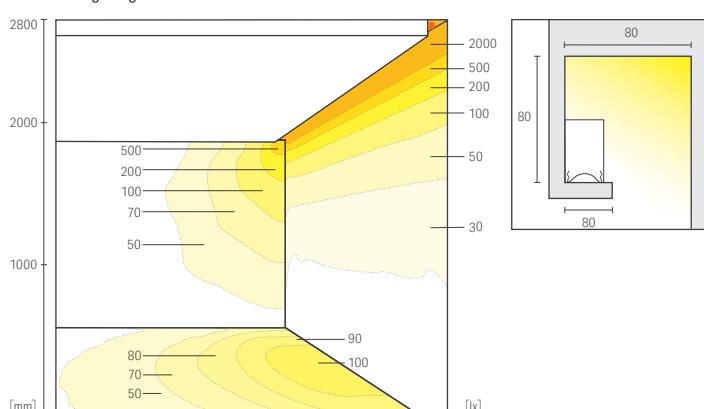

Cove lighting CH=2800

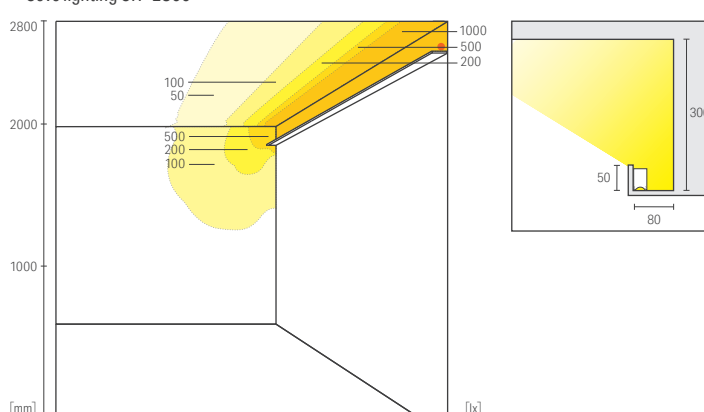

LRE

Vivoxi Graze

Vivoxi Graze THOF®

RECTA


THOF®

Creide® / lens

silux® K

silux wide® K

nano line

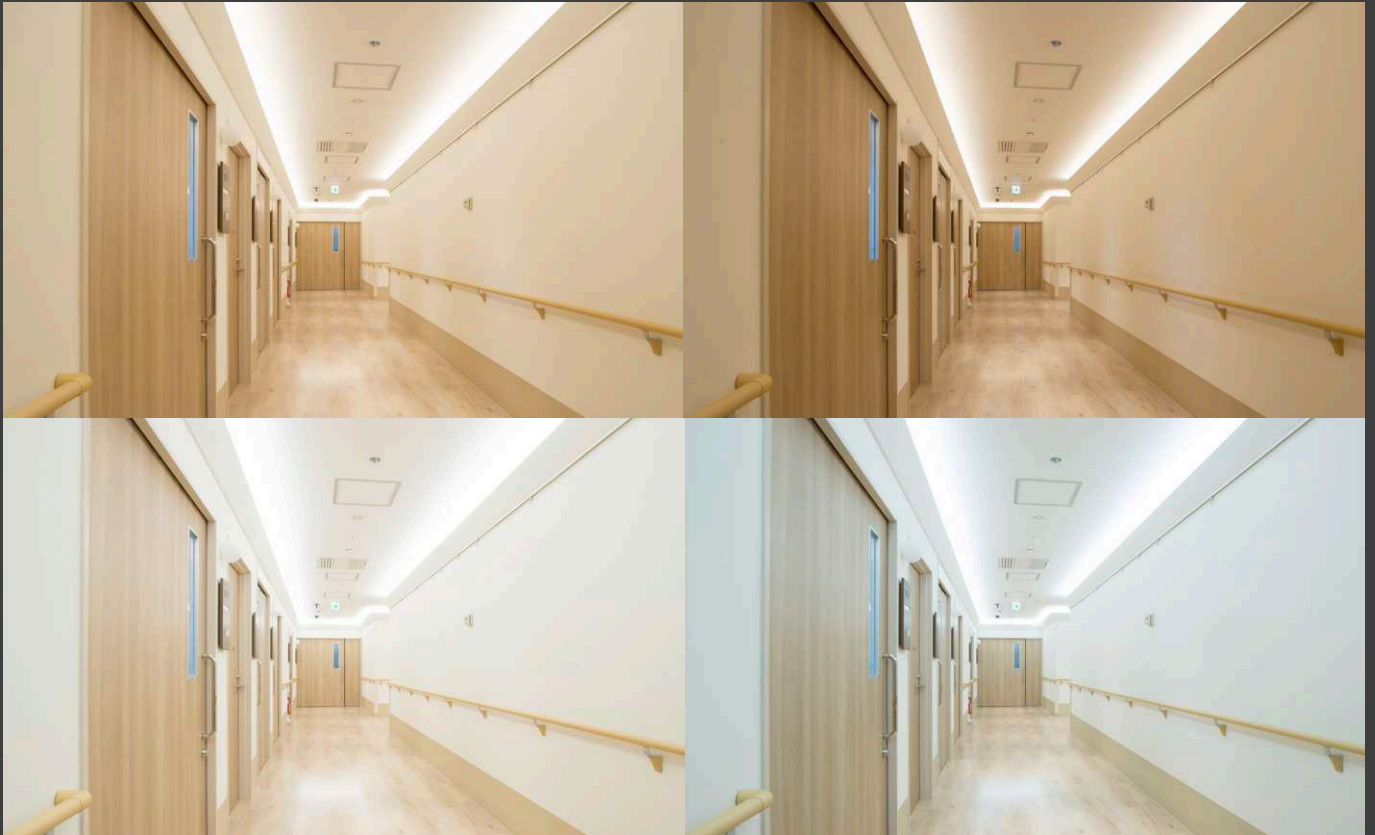

Medical Corporation Showa-kai Hokkaido Gastroenterology Hospital
Location: JAPAN
Lighting Design: DESIGN Lab. +Ca



KOHAN SHOJI CO., LTD
Location: Japan

Tunable white with intense brightness
for powerful cove lighting as well as ambient lighting,
3 side emission simple design for clean minimalist applications
Free choice of two different CCTs efficiently emphasizing design intent,
ambiance and circadian lighting


Specifications

Dimensions

Cross section W 24 x H 39 mm
Standard length 3 types of fixed length
Custom order 7 types of fixed length with MOQ

1003	907			
806	705	604		
503	407	306	205	103

Color temperature


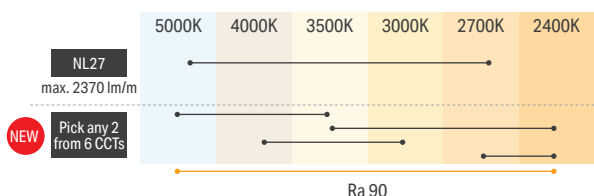


Electrical & Output


@NL27 (N: 5000K, L27: 2700K)

	N 100%	N 100% / L27 100%	L27 100%
Color temperature			
Power Consumption (W/m)	15.6	31.2	15.6
Luminous flux (lm/m)	1213	2370	1096

Light distribution



Features

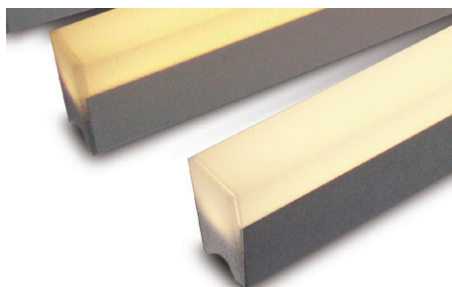

Squared section with uniform and homogenous
3 side emitted surface




Seamless lighting at the joint
Neither clips nor cable can be seen

Project reference

Commercial building


Recommended CCT range
N:5000K - L27: 2700K

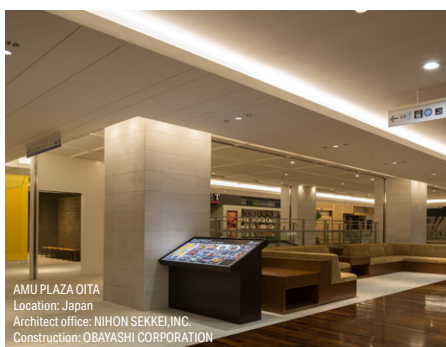

Mirror Light

Recommended CCT range
N:5000K - L27: 2700K

Enable to light face and avoid shadows when
applying makeup. Skin and clothing can be
checked on how they look during the day, in
the evening, or in a dark room.

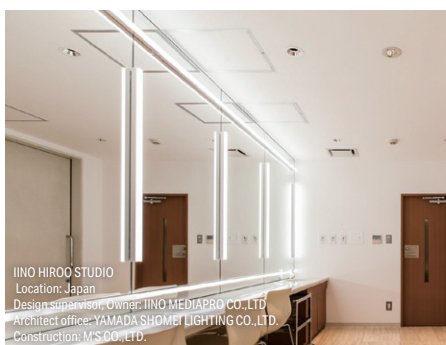






- Dynamic white by 2ch control signals
- Seamless, 3 surface-emitting light with eliminated dots
- Available for customising colour combination with MOQ



Model No.

LTH		- 		- 		- DF		- I	
Product Name	Length	Light source color		Cover Type	Environment				
LTH	0100 0500 1000	Higher CCT Lower CCT Select 2 CCTs N : 5000K W : 4200K WW : 3500K L30 : 3000K L27 : 2700K L24 : 2400K		DF : Diffuser	I : Indoors				

Light Intensity Refer to P.123

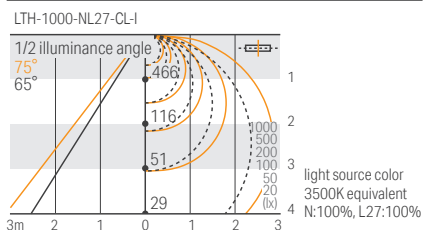

Specification


Length	0100	0500	1000
Model No.	LTH-0100-NL27-DF-I	LTH-0500-NL27-DF-I	LTH-1000-NL27-DF-I
Power consumption	3.1W (Max)	15.6W (Max)	31.2W (Max)
Fitting length(L)	103mm	503mm	1003mm
Weight	50g	210g	400g
Luminaire efficacy(2700K)	76.1 lm/W	76.1 lm/W	76.1 lm/W
Light source color	○ = Device inventory		
ex. NL27 5000K~2700K	○	○	○
Dimming rate			
N 100%, L27 0% Ra94	121lm	606lm	1213lm
N 100%, L27 100%Ra95	237lm	1185lm	2370lm
N 0%, L27 100% Ra94	109lm	548lm	1096lm

The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length per circuit	4m
Material (body)	Polycarbonate, Aluminum
Attachments	① Mounting parts 2pcs
Option parts	① Mounting parts ② Power supply cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required


External dimensions

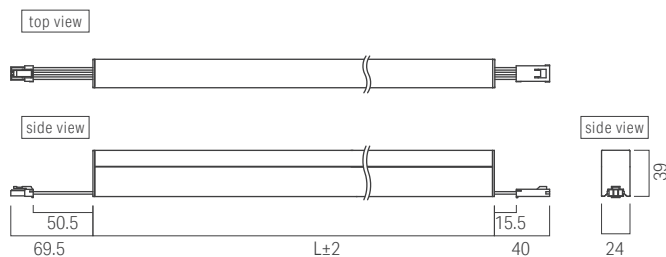

Max. connectable length per power supply

Length of LED fixture (70% loading factor) During dimmer use	Power supply
~1.2m	50W power supply
~2.5m	100W power supply
~4m	150W power supply

Cross sectional view




Option parts

1 Mounting parts A Attachment

Model No : LTH-PTA
Attached with LED fixture
2 pcs / bag


For extra order
2 pcs / bag



2 Power supply cable 500mm for THOF

Model No : CAD-0500-MDFD-I
1 pc per circuit for connecting the LED fixture
to power supply or dimmer driver.

Black : +
White : 1ch- (light source color: white)
Brown : 2ch- (light source color: warm white)

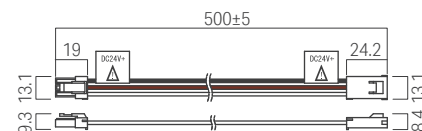


CRI and luminous flux data for each CCT combination

				Length: 100		Length: 500		Length: 1000	
Light source color				Ra	lm	Ra	lm	Ra	lm
N	W	N	100%	95	121	95	606	95	1213
			100%	94	233	94	1166	95	2332
			0%	93	115	93	575	93	1150
N	WW	N	100%	95	121	95	606	95	1213
			100%	95	500	95	1000	95	2000
			0%	93	106	93	530	93	1060
N	L30	N	100%	95	121	95	606	95	1213
			100%	96	222	96	1111	96	2222
			0%	92	106	92	531	92	1062
N	L27	N	100%	95	121	95	606	95	1213
			100%	94	237	94	1185	94	2370
			0%	94	109	94	548	94	1096
N	L24	N	100%	95	121	95	606	95	1213
			100%	96	212	96	1061	96	2122
			0%	91	99	91	497	91	994
W	WW	W	100%	93	115	93	575	93	1150
			100%	94	219	94	1097	94	2194
			0%	93	106	93	530	93	1060
W	L30	W	100%	93	115	93	575	93	1150
			100%	93	222	93	1111	93	2222
			0%	92	106	92	531	92	1062
W	L27	W	100%	93	115	93	575	93	1150
			100%	94	213	94	1067	94	2134
			0%	94	109	94	548	94	1096
W	L24	W	100%	93	115	93	575	93	1150
			100%	94	216	94	1080	94	2160
			0%	91	99	91	497	91	994
WW	L30	WW	100%	93	106	93	530	93	1060
			100%	94	211	94	1053	94	2106
			0%	92	106	92	531	92	1062
WW	L27	WW	100%	93	106	93	530	93	1060
			100%	91	210	91	1051	91	2102
			0%	94	109	94	548	94	1096
WW	L24	WW	100%	93	106	93	530	93	1060
			100%	94	204	94	1020	94	2040
			0%	91	99	91	497	91	994
L30	L27	L30	100%	92	106	92	531	92	1062
			100%	93	205	93	1027	93	2054
			0%	94	109	94	548	94	1096
L30	L24	L30	100%	92	106	92	531	92	1062
			100%	93	204	93	1020	93	2040
			0%	91	99	91	497	91	994
L27	L24	L27	100%	94	109	94	548	94	1096
			100%	92	197	92	987	92	1974
			0%	91	99	91	497	91	994

Installing the product


For horizontal installation

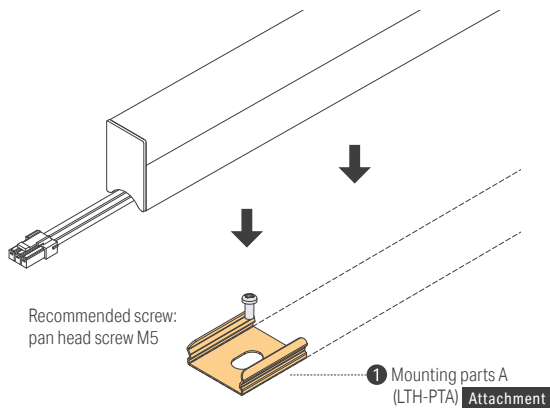

⚠ Cautions

- Do not recess the LED fixture on the wall without any clearance or heat dissipation for releasing the heat of the LED fixture.
- To avoid the mounting parts being deformed, DO NOT over-screw the screws, use countersunk screw and install the LED fixture forcefully when the mounting parts are misaligned. When using deformed Mounting parts, the LED fixture may drop from the Mounting parts. Make sure the LED fixture is fixed tightly after installation.


For vertical installation

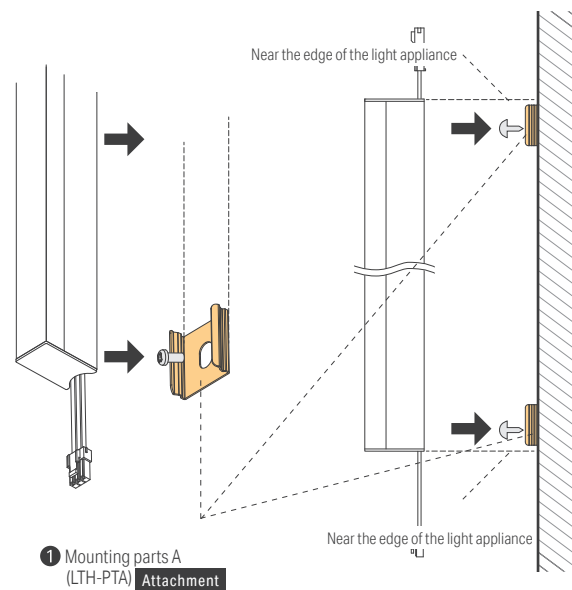

System configuration diagram

- Max. connectable total length of LED fixture per driver depends on the capacity of the driver and power supply.
- Max. length per circuit of Luci THOF is 4m.
If it exceeds 4m, please split into multiple circuits.
- Max. distance from the power supply to the end of LED fixture is 10 m.
- Twist shield cable is recommended to use as a signal cable.

Use an appropriate signal cable and install it according to the instructions caution of the signal cable installation.

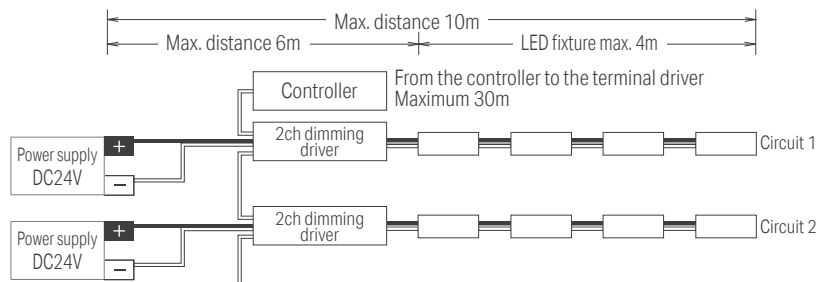

Luci original dynamic white dimmer controller

PWM Light Controller for THOF (LLC-PLC-T)

2 channel mode: switching channel by pressing the knob for dimming each separately
Dim-to-warm mode: rotating knob to change CCT and brightness at the same time.



Input voltage	DC12~24V
Input current	Max.5A
Output current	Max.5A
Size	W70*H120*D42 mm
Usage environment	Indoors

Multi Controller Switch for THOF (LLC-MFC-SWC)

Switch for calling a preset scene in LLC-MFC-11 and manual slider for dimming.



Input voltage	DC12~24V
Input current	Max.100mA
Output current	Max.5A
Size	W70*H120*D40 mm
Usage environment	Indoors

Use these together

Multi Controller (LLC-MFC-11)



Input voltage	DC12~24V
Input current	
Output current	1A max/CH
Size	W232.5*H124*D33.5mm
Usage environment	Indoors

Luci original dynamic white dimmer driver

PWM Dimming driver 5A for THOF (LLC-PWM5A-T)

Dimmer driver for LLC-PLC-T and LLC-MFC-10 (dimming protocol: PWM)



Input voltage	DC12~24V
Input current	Max. 5A
Output current	Max.5A
Size	W130*H75*D27 mm
Usage environment	Indoors

0-10V dynamic white dimmer driver

2ch 0-10V dimmer driver (DIM-S2L8V-O) EUCIIPS



Input voltage	DC12~24V
Output current	8A/2CH(for Brightness mode) Totally 8A(for CCT mode)
Size	W167*H51*D23mm
Usage environment	Indoors

Illuminance data

LTH
Luci THOF


Color temperature

5000K-2700K

Direct horizontal surface light intensity distribution chart


LTH-1000-NL27-CL-I

Light source color 5000K
N:100%, L27:0%
Brightness 238 cd
Luminous flux 1213 lm
Color rendering index Ra 95




LTH-1000-NL27-CL-I

Light source color 3500K equivalent
N:100%, L27:100%
Brightness 466 cd
Luminous flux 2370 lm
Color rendering index Ra 94




LTH-1000-NL27-CL-I

Light source color 2700K
N:0%, L27:100%
Brightness 216 cd
Luminous flux 1096 lm
Color rendering index Ra 94




Recommend dimensions and illumination distributions


Cornice lighting-1 CH=2800

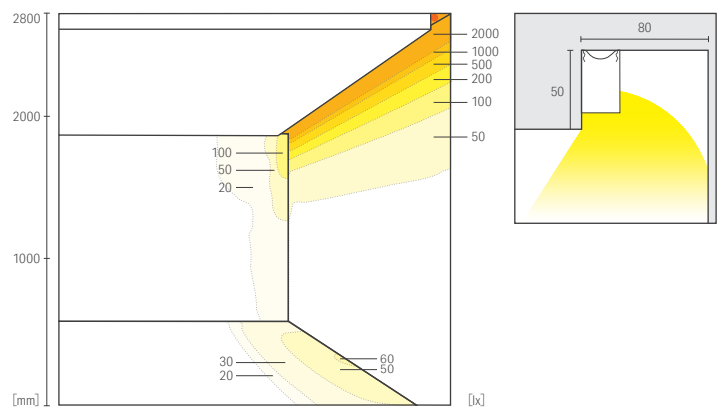

Cornice lighting-2 CH=2800

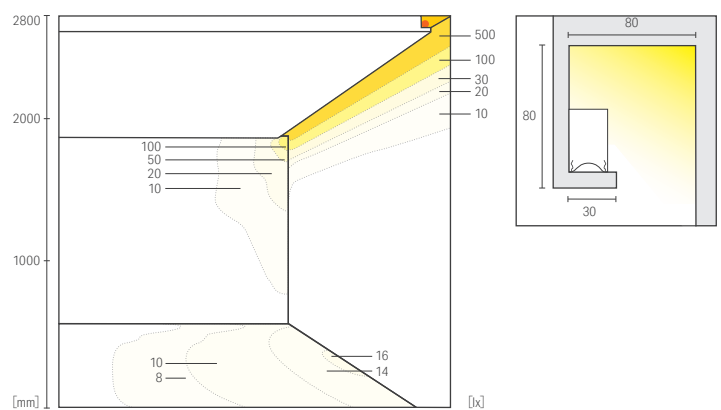

Cove lighting CH=2800

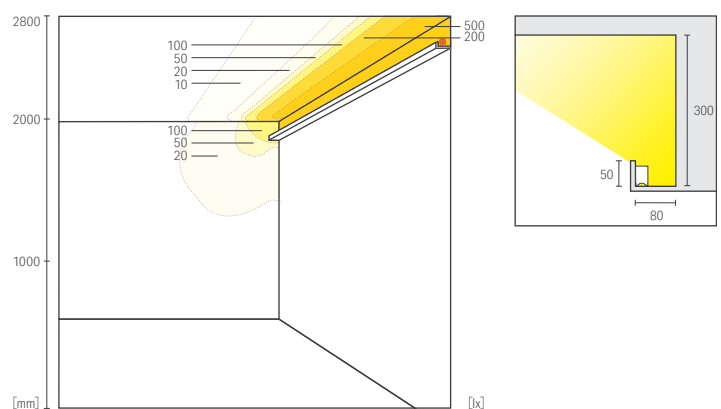

LTH

Vivox Graze

Vivox Graze THOF®

RECTA

THOF®

Creide® / lens

silux® K

silux wide® K

nano line

Luci Creide® F / Luci Creide® lens

LCEF / LCEL



Ibaraki Western Medical Center
Location: Japan
Architect office: YAMASHITA NEMOTOHIDE SEKKEI JV

Lighting Design: YAMASHITA SEKKEI INC.
Construction: MAEDA CORPORATION
Photo: Ca'd'Oro/SASAKI TOSHINORI



TRUSCO NAKAYAMA KYOTO KAGURAOKA RENGETSOU
Location: Japan
Architect office: NIKKEN SEKKEI LTD.
Photo: Kouji Horiuchi

Luci Creide® F / Luci Creide® lens

Only 17.4 mm in height with a quadrant luminous surface to be hidden into a cove

Tilted peak intensity angle for wide and smooth light effect

LCEF: dots-free surface,

LCEL: narrower spread angle with the extruded optical lens inside

Specifications

Dimensions

Cross section W 42.5 x H 17.4 mm


Length	6 types of fixed length
--------	-------------------------

1459	1169
880	510
300	151


Electrical & Output

Model	LCEF	LCEL
Power Consumption (W/m)	20.7	20.7
Luminous flux @ 3000K (lm/m)	1263	1221


Color temperature




Features

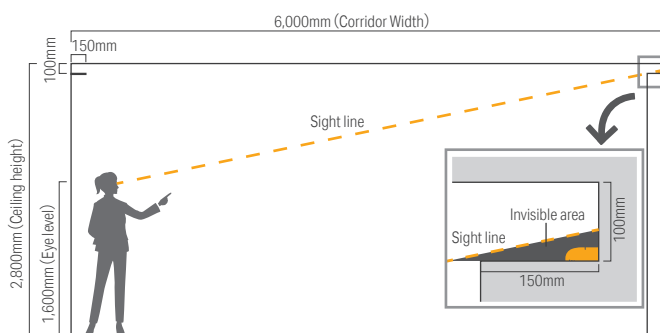



Connectors are concealed behind lighting fixtures

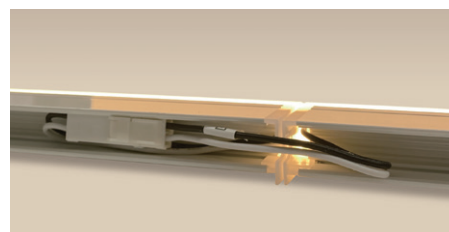

Luci Creide® F

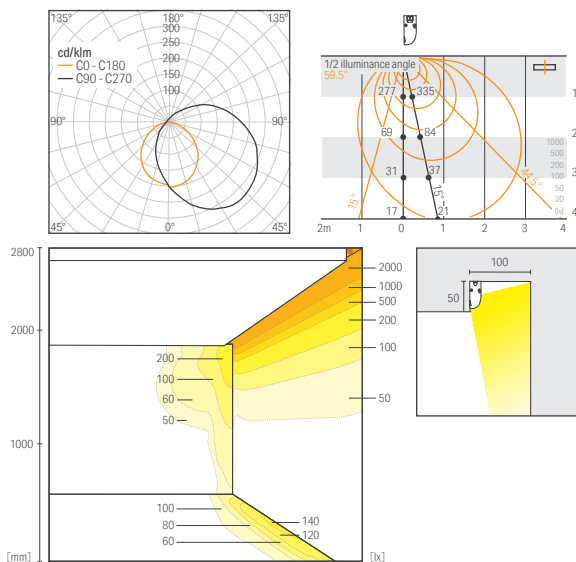

Luci Creide® lens

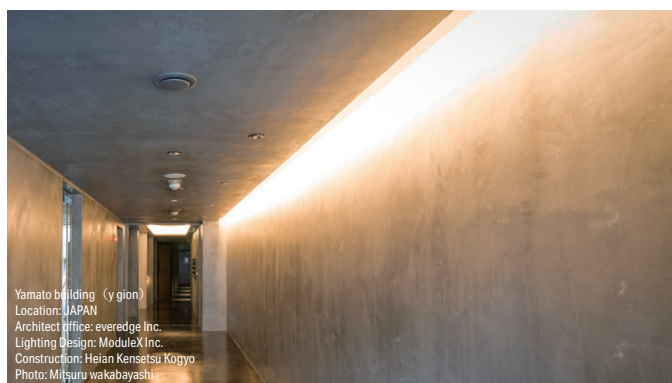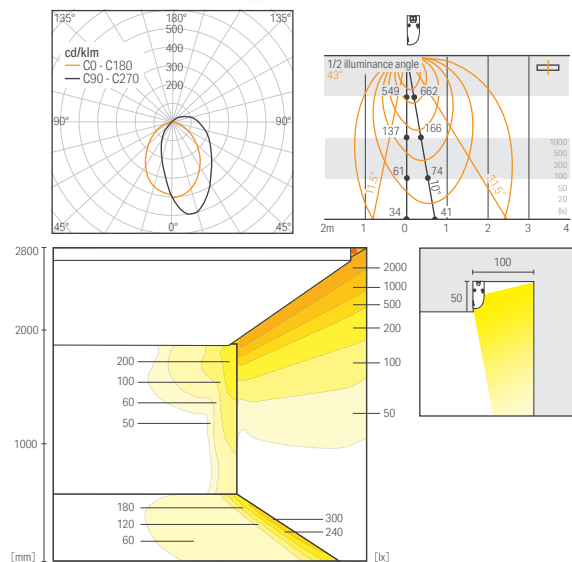

LCEF / LCEL

Color management
MacAdam 3 step




3 years
warranty

- For cove and wall grazer light with only 17.4mm height easy to be hidden
- Creide F: wider spread angle with diffuser cover
- Creide lens F: narrower spread angle with the lens in diffused cover

Model No.

Product Name	Length	Light source color	Cover Type	Environment
F: F L: lens	0150 0300 0510 0880 1170 1460	W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K	DF: Diffuser	I: Indoor

Light Intensity Refer to P.130



Specification

Length	0150	0300	0510	0880	1170	1460
Fitting length(L)	151mm	300mm	510mm	880mm	1169mm	1459mm
Power consumption	3.0W	6.0W	10.6W	18.1W	24.2W	30.2W

Creide F

Length	0150	0300	0510	0880	1170	1460
Model No.	LCEF-0150-□-DF-I	LCEF-0300-□-DF-I	LCEF-0510-□-DF-I	LCEF-0880-□-DF-I	LCEF-1170-□-DF-I	LCEF-1460-□-DF-I
Weight	70g	133g	218g	365g	485g	620g
Luminaire efficacy(2700K)	62.0 lm/W	62.0 lm/W	62.0 lm/W	62.0 lm/W	62.0 lm/W	62.0 lm/W
Light source color	○ = Device inventory * = Equivalent					
W 4000K Ra92	○ 195lm	○ 391lm	○ 684lm	○ 1174lm	○ 1565lm	○ 1956lm
WW 3500K Ra93	○ 189lm	○ 378lm	○ 662lm	○ 1135lm	○ 1514lm	○ 1892lm
L30 3000K Ra94	○ 184lm	○ 369lm	○ 646lm	○ 1108lm	○ 1478lm	○ 1847lm
L27 2700K Ra93	○ 174lm	○ 349lm	○ 612lm	○ 1049lm	○ 1399lm	○ 1749lm
L24 2400K Ra93	○ 163lm	○ 327lm	○ 573lm	○ 982lm	○ 1310lm	○ 1638lm


Creide lens

Length	0150	0300	0510	0880	1170	1460
Model No.	LCEL-0150-□-DF-I	LCEL-0300-□-DF-I	LCEL-0510-□-DF-I	LCEL-0880-□-DF-I	LCEL-1170-□-DF-I	LCEL-1460-□-DF-I
Weight	79g	151g	240g	420g	558g	712g
Luminaire efficacy(2700K)	59.7 lm/W	59.7 lm/W	59.7 lm/W	59.7 lm/W	59.7 lm/W	59.7 lm/W
Light source color	○ = Device inventory * = Equivalent					
W 4000K Ra92	○ 190lm	○ 381lm	○ 668lm	○ 1145lm	○ 1527lm	○ 1908lm
WW 3500K Ra93	○ 184lm	○ 369lm	○ 646lm	○ 1108lm	○ 1477lm	○ 1847lm
L30 3000K Ra94	○ 178lm	○ 357lm	○ 625lm	○ 1071lm	○ 1428lm	○ 1785lm
L27 2700K Ra93	○ 172lm	○ 344lm	○ 603lm	○ 1034lm	○ 1379lm	○ 1724lm
L24 2400K Ra93	○ 160lm	○ 320lm	○ 560lm	○ 960lm	○ 1280lm	○ 1600lm

General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length per circuit	5m
Material (body)	Polycarbonate, Aluminum
Attachments	① Mounting clip 1 pc for 150 mm 2 pcs for 300 mm and 510 mm 3 pcs for 880 mm and 1170 mm 4 pcs for 1460 mm
Option parts	① Mounting clip ② Outerclip ③ ④ Magnet set ⑤ Power supply cable ⑥ Joint cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

External dimensions

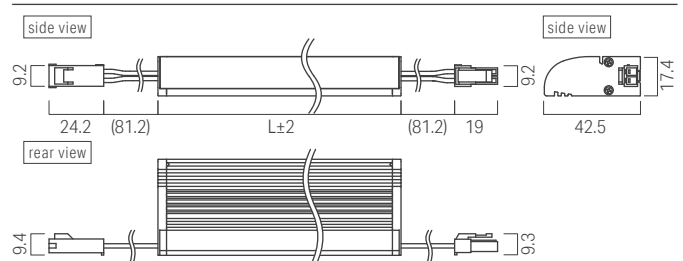


Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~ 1.6 m	50W power supply
~ 3.5 m	100W power supply
~ 5.3 m*	150W power supply

Luci Creide® F / Luci Creide® lens


Installing the product

Mounting clip A installation: behind fixing

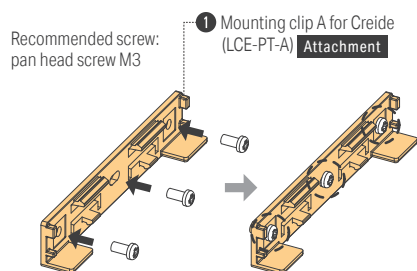


Use three screws per one Mounting clip A.

Recommend to use at least 3 pcs per meter with less than 380mm pitch.




Mounting clips should be installed in the position (as shown above).




Clasp the LED fixture onto the preset mounting clips (a click sound will be produced once it is tightly fastened).

Magnet installation

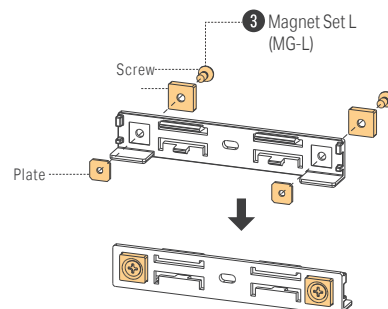


Ensure that there are no gaps in between fixture and surface


Outer clip installation

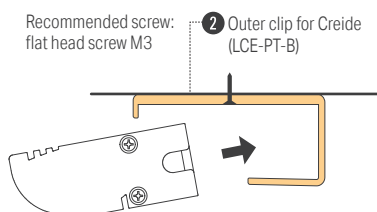

Recommend to use at least 3 pcs per meter with less than 380mm pitch.




Magnet installation

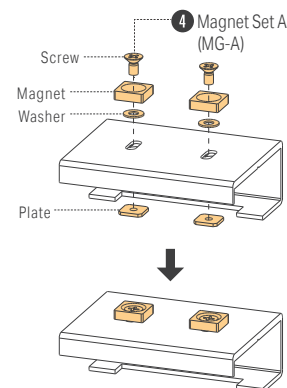

If the flat head screw is short and the plate does not tighten, please remove the washer.


For vertical installation



1 Mounting clip A for Creide (LCE-PT-A) Attachment

For vertical installation, make sure the LED fixture hook on the edge of the mounting clip in accordance to the diagram.
Caution: If the weight of the LED fixture is not supported by the edge of the mounting clip, it may slide down and fall.


Recommended screw: pan head screw M3



Secure 1 mounting clip with 3 screws
Caution: If using only 1 or 2 screws, the LED fixture may fall since the holding force is not enough.


Installing the product

Recommended number of Mounting clips and magnets

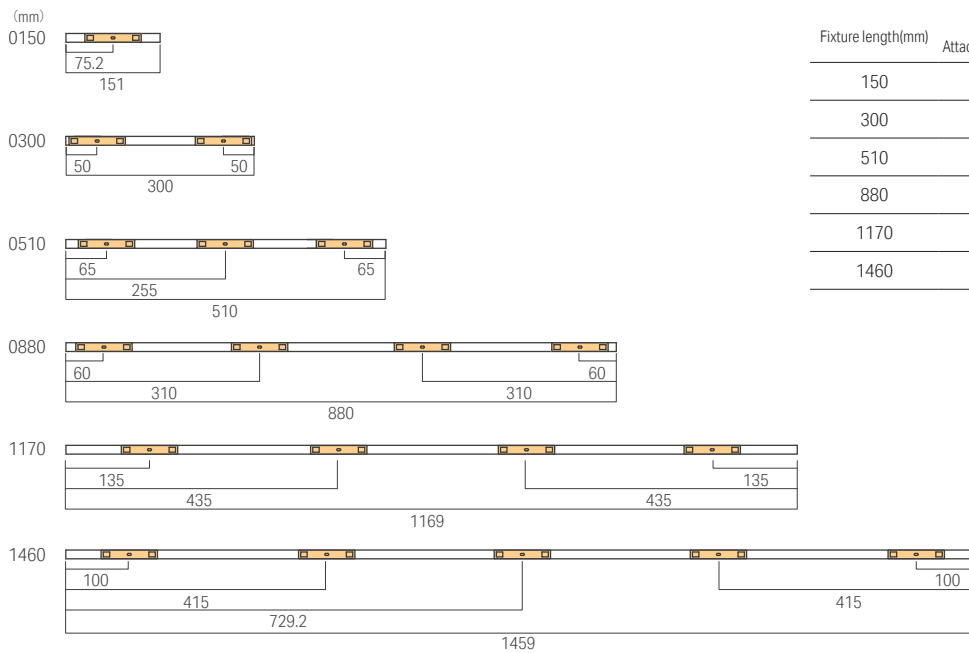


Fixture length(mm)	① Attachment mounting clip	① Extra mounting clip	③ Magnet Set L
150	1 pc	0 pc	2 pcs
300	2 pcs	0 pc	4 pcs
510	3 pcs	1 pc	8 pcs
880	4 pcs	1 pc	10 pcs
1170	4 pcs	1 pc	10 pcs
1460	5 pcs	1 pc	12 pcs
Unit of order		2pcs/bag	10 pcs/bag

Recommended number of Outer clips and magnets

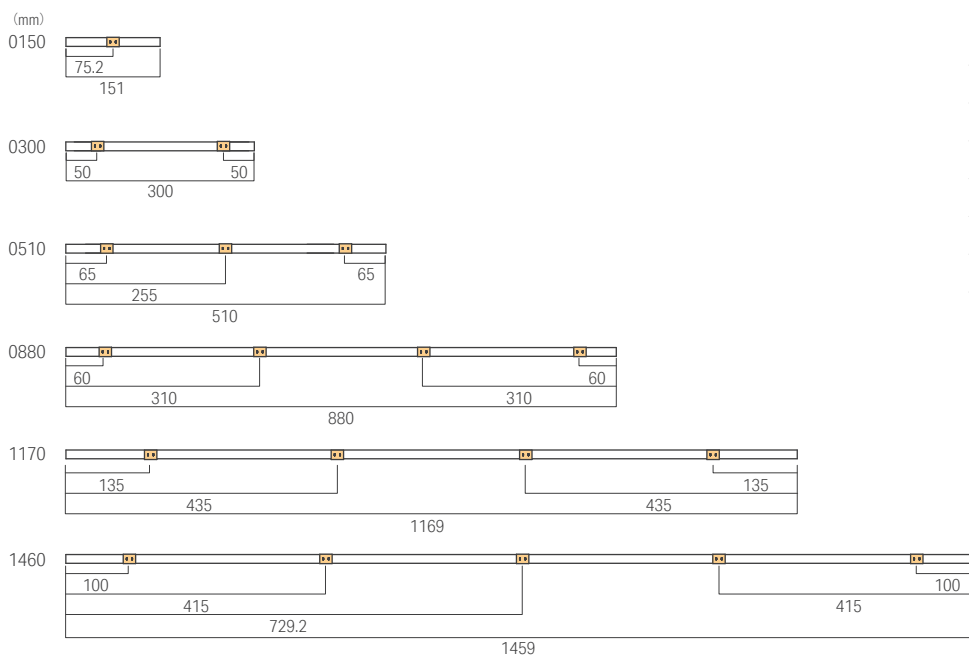

Fixture length(mm)	② Extra mounting clip	④ Magnet Set L
150	1 pcs	2 pcs
300	2 pcs	4 pcs
510	3 pcs	6 pcs
880	4 pcs	8 pcs
1170	4 pcs	8 pcs
1460	5 pcs	10 pcs
Unit of order		2pcs/bag 5pcs/bag

System configuration diagram

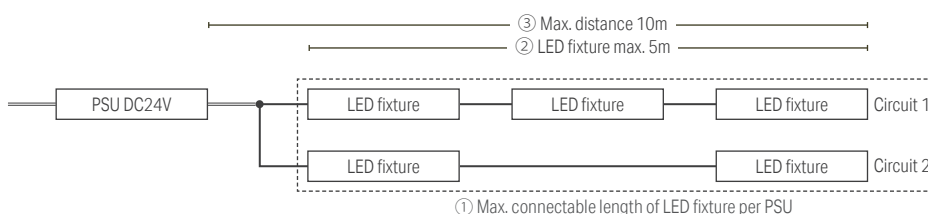

① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)


② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.

③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci Creide® F / Luci Creide® lens

Distance from wall

Illuminance Data




LCEF Luci Creide F

Color temperature

4000K 3500K 3000K 2700K 2400K




Direct horizontal surface light intensity distribution chart



050mm

LCEF-1170-W-DF-I




Light source color 4000K
Brightness 310 cd
Luminous flux 1565 lm
Color rendering index Ra 92



100mm

LCEF-1170-WW-DF-I




Light source color 3500K
Brightness 300 cd
Luminous flux 1514 lm
Color rendering index Ra 93



150mm

LCEL-1170-L30-DF-I




Light source color 3000K
Brightness 293 cd
Luminous flux 1478 lm
Color rendering index Ra 94



200mm

LCEL-1170-L27-DF-I



Light source color 2700K
Brightness 277 cd
Luminous flux 1399 lm
Color rendering index Ra 93



300mm


LCEL-1170-L24-DF-I

Light source color 2400K
Brightness 260 cd
Luminous flux 1310 lm
Color rendering index Ra 93




Recommend dimensions and illumination distributions


Cornice lighting CH=2800

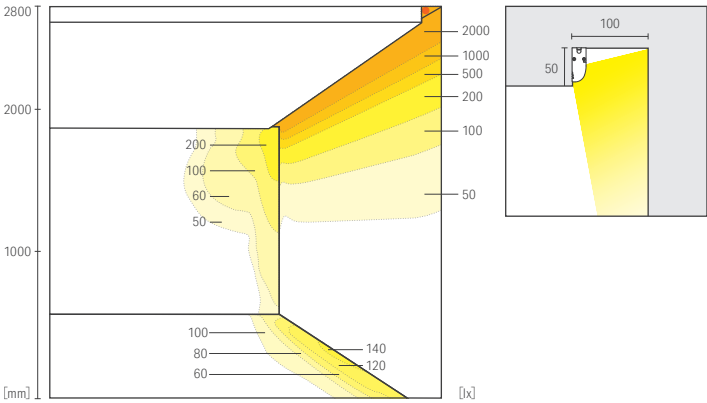

Cornice lighting CH=5000

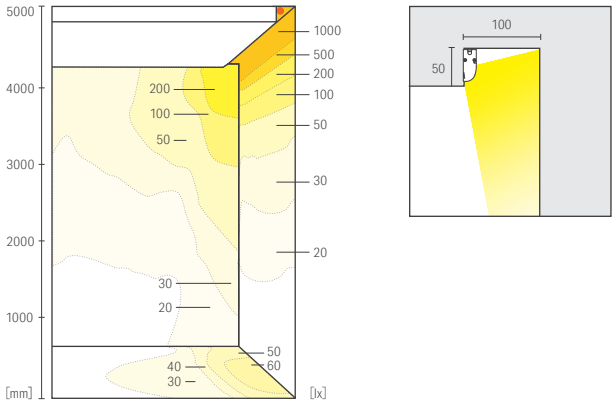

Cove lighting CH=2800

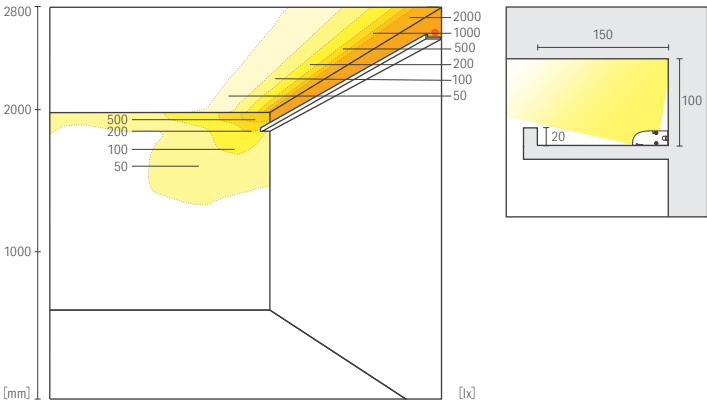

LCEF / LCEL

Vivoxi Graze

Vivoxi Graze THOF®

RECTA

THOF®

Creide®F / lens

silux® K


silux wide® K

nano line

Luci Creide® F / Luci Creide® lens

Distance from wall

Illuminance Data




LCEL Luci Creide lens

Color temperature


4000K 3500K 3000K 2700K 2400K

Direct horizontal surface light intensity distribution chart





050mm

LCEL-1170-W-DF-I
Light source color 4000K
Brightness 608 cd
Luminous flux 1527 lm
Color rendering index Ra 92

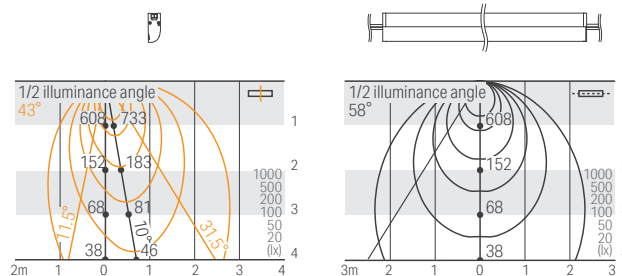



100mm

LCEL-1170-WW-DF-I
Light source color 3500K
Brightness 588 cd
Luminous flux 1477 lm
Color rendering index Ra 93

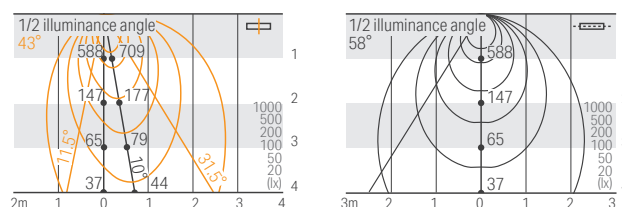



150mm

LCEL-1170-L30-DF-I
Light source color 3000K
Brightness 568 cd
Luminous flux 1428 lm
Color rendering index Ra 94

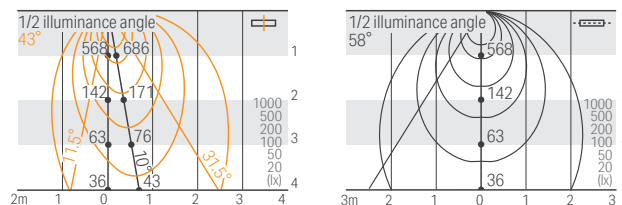


200mm

LCEL-1170-L27-DF-I
Light source color 2700K
Brightness 549 cd
Luminous flux 1379 lm
Color rendering index Ra 93

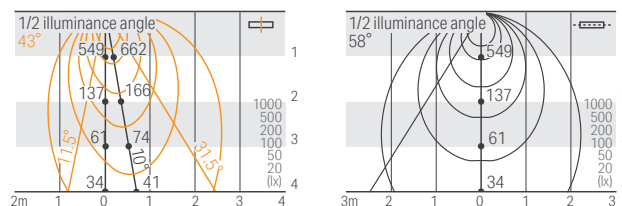


300mm

LCEL-1170-L24-DF-I
Light source color 2400K
Brightness 509 cd
Luminous flux 1280 lm
Color rendering index Ra 93

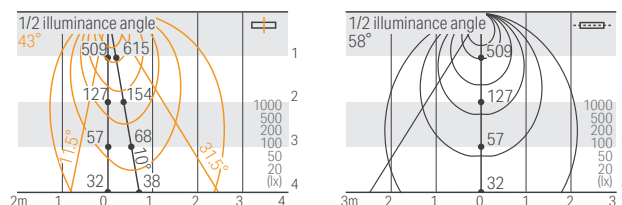


Recommend dimensions and illumination distributions


Cornice lighting CH=2800

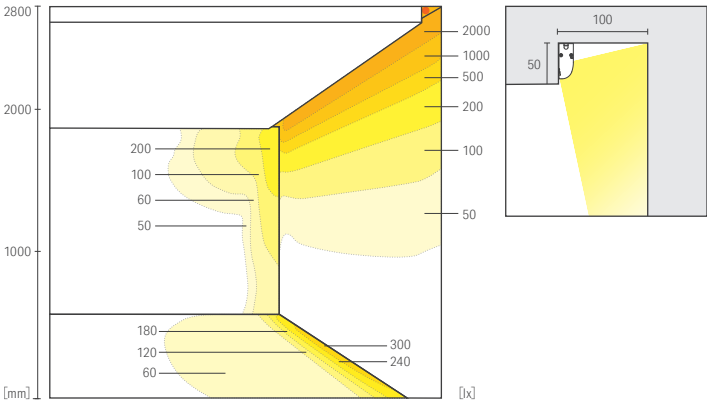

Cornice lighting CH=5000

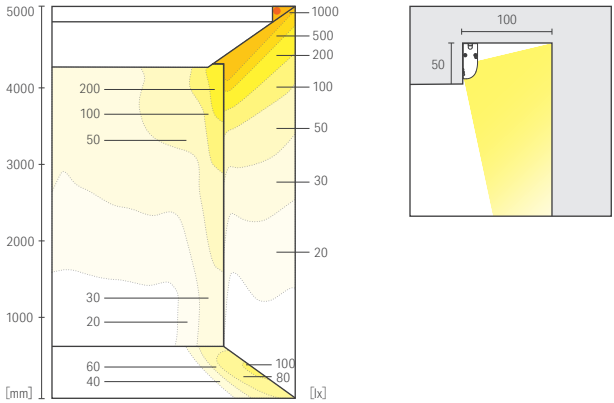

Cove lighting CH=2800

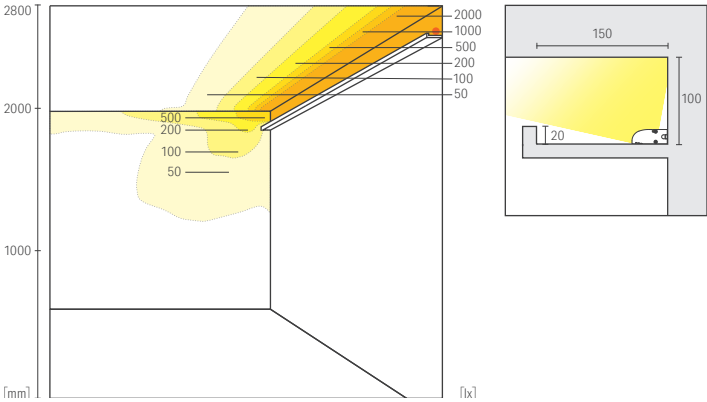

LCEF / LCEL

Vivoxi Graze

Vivoxi Graze THOF®

RECTA

THOF®

Creide® F / lens

silux® K

silux wide® K

nano line

Luci silux® K

LSXK



HIRAKATA T-SITE
Location: JAPAN
Client: SO-TWO,INC
Architect office: Takenaka Corporation
TSUTAYA Interior decoration design: Culture Convenience Club Co., Ltd. Takenaka Corporation

Lighting design: Uchiyama Creative Lighting Design Inc.
Construction: Takenaka Maedagumi Joint Venture
Graphic design: HIROMURA DESIGN OFFICE
Fabric design: Studio Akane Monyama
Photo: Nacasa & Partners Inc.




An Apartment at River Valley Road
Location: Singapore
Lighting design: Light Collab(Toh Yah Li & Chua Li Qi)

Construction: U.SAGE
CONTRACTS PTE LTD
Photo: ND Photography



HAPPO-EN
Location: Japan
Architect office: hashimoto yukiyo design studio Inc.

Lighting design: Illumination Of City Environment
Interior construction: Shouwa
Lighting construction: Hirose Electric Co., Ltd

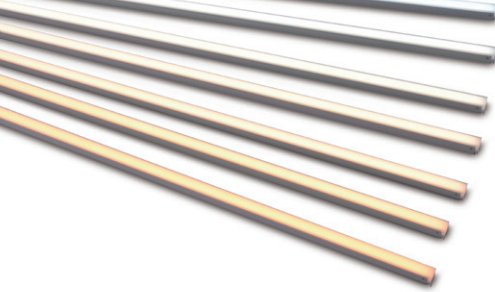

Luci silux® K

12×16mm homogeneous square section rigid light
3 different power consumption options to support energy saving project requirement
With various length types and accessories
ideal for various applications such as
recessed mount, shelf and cove light

Specifications

Dimensions



Cross section : W 12xH 14 mm
Length : 10 types of fixed length

1451	1173
1008	823
573	509
388	259
74	

Electrical & Output

Power Consumption (W/m)	13.3	8.1	4.3
Luminous flux @ 3000K (lm/m)	581	421	199


Color temperature



The square cross-section silux K emits light from the diffused cover, 12 mm on the top and 3 mm on both sides, so the light shines to the corners of the fixtures.



Features

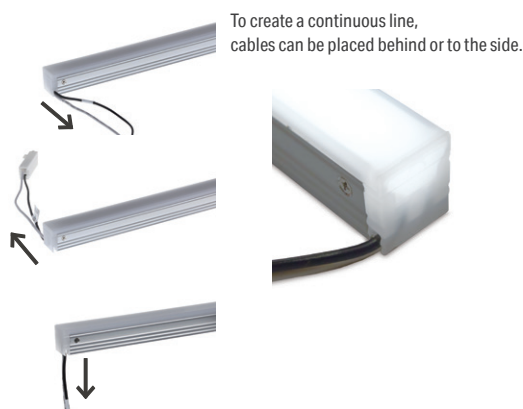

To create a continuous line, cables can be placed behind or to the side.

Recessed




Accessories

Multiclip (bottom)




For recessed/surface mounting
(Included item)

Multiclip (side)




For cove lighting (Included item)
Quick installation as the clip is attached to the LED fixture first, rotated 90° and screwed in from the side of the LED fixture.

Multiclip+Magnet




For recessed/surface mounting with magnets
To mount the LED fixture on a metal or steel. Easy attach and detach for maintenance.

Liftclip

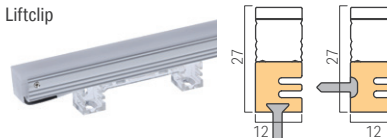

For recessed/side mounting
The connectors fit inside the clip.

Liftclip+Magnet

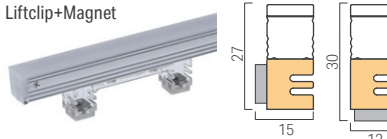


For recessed/side mounting with magnets
To mount the LED fixture on a metal or steel. Easy attach and detach for maintenance.

Outerclip




For surface/downward mounting
Easy attach and detach for maintenance.

Project reference

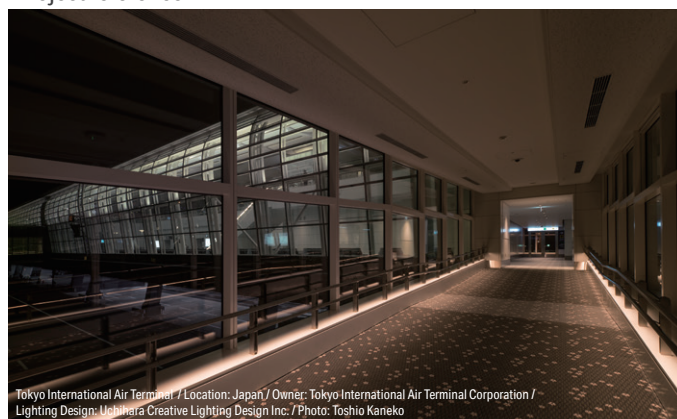

Tokyo International Air Terminal / Location: Japan / Owner: Tokyo International Air Terminal Corporation / Lighting Design: Ushihara Creative Lighting Design Inc. / Photo: Toshio Kaneko

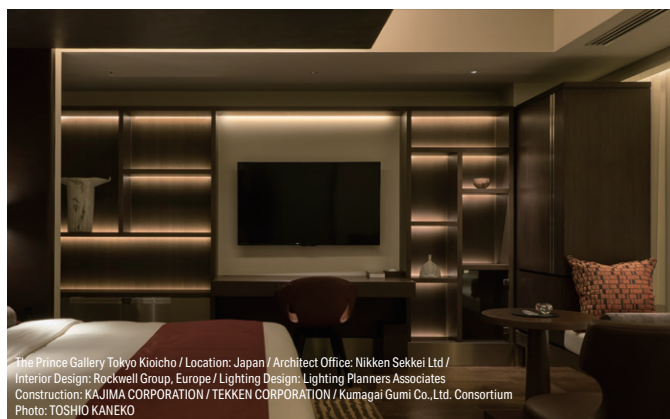

The Prince Gallery Tokyo Kioicho / Location: Japan / Architect Office: Nikken Sekkei Ltd / Interior Design: Rockwell Group, Europe / Lighting Design: Lighting Planners Associates Construction: KAJIMA CORPORATION / TEKKEN CORPORATION / Kumagai Gumi Co., Ltd. Consortium Photo: TOSHIO KANEKO


- Homogeneous rigid light with a square shape
- 3 different wattage, 10 types of length
- Ideal for shelf/cove light and recessed direct view light on ceiling/wall

Model No.

Product Name	Length	Light source color	Cover Type	Environment	Wattage
LSXK	0074 0702 0259 0823 0388 1008 0509 1137 0573 1451	N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L21 : Warm white 2100K	DF : Diffuser	I : Indoor	13 : 13.3W/m 8 : 8.1W/m 4 : 4.3W/m

Light Intensity

Refer to P.141



Specification

Length	0074	0259	0388	0509	0573
Fitting length(L)	74 mm	259 mm	388 mm	509 mm	573 mm
Weight	15 g	40 g	59 g	76 g	84 g
Length	0702	0823	1008	1137	1451
Fitting length(L)	702 mm	823 mm	1008 mm	1137 mm	1451 mm
Weight	110 g	120 g	145 g	160 g	206 g

13.3 W/m series

Model No.	LSXK-0074-□-DF-I-13		LSXK-0259-□-DF-I-13		LSXK-0388-□-DF-I-13		LSXK-0509-□-DF-I-13		LSXK-0573-□-DF-I-13					
Power consumption	0.7 W		3.3 W		5.2 W		6.6 W		7.6 W					
Model No.	LSXK-0702-□-DF-I-13		LSXK-0823-□-DF-I-13		LSXK-1008-□-DF-I-13		LSXK-1137-□-DF-I-13		LSXK-1451-□-DF-I-13					
Power consumption	9.5 W		10.9 W		13.3 W		15.2 W		19.5 W					
Light source color	N 5000K		W 4000K		WW 3500K		L30 3000K		L27 2700K		L24 2400K		L21 2100K	
@1008mm	Ra 93 ○ 620 lm		Ra 94 ○ 620 lm		Ra 94 ○ 594 lm		Ra 93 ○ 581 lm		Ra 93 ○ 554 lm		Ra 94 ○ 515 lm		Ra 90 ○ 515 lm	
Luminaire efficacy	57.9 lm/W		57.9 lm/W		55.5 lm/W		54.2 lm/W		51.8 lm/W		48.1 lm/W		45.1 lm/W	

8.1 W/m series

Model No.	LSXK-0074-□-DF-I-8		LSXK-0259-□-DF-I-8		LSXK-0388-□-DF-I-8		LSXK-0509-□-DF-I-8		LSXK-0573-□-DF-I-8					
Power consumption	0.5 W		2.0 W		3.1 W		4 W		4.6 W					
Model No.	LSXK-0702-□-DF-I-8		LSXK-0823-□-DF-I-8		LSXK-1008-□-DF-I-8		LSXK-1137-□-DF-I-8		LSXK-1451-□-DF-I-8					
Power consumption	5.7 W		6.6 W		8.1 W		9.2 W		11.8 W					
Light source color	N 5000K		W 4000K		WW 3500K		L30 3000K		L27 2700K		L24 2400K		L21 2100K	
@1008mm	Ra 93 ○ 450 lm		Ra 94 ○ 450 lm		Ra 94 ○ 431 lm		Ra 93 ○ 421 lm		Ra 93 ○ 402 lm		Ra 94 ○ 373 lm		Ra 90 ○ 351 lm	
Luminaire efficacy	68.2 lm/W		68.2 lm/W		65.3 lm/W		63.8 lm/W		60.9 lm/W		56.5 lm/W		53.2 lm/W	


4.3 W/m series

Model No.	LSXK-0074-□-DF-I-4		LSXK-0259-□-DF-I-4		LSXK-0388-□-DF-I-4		LSXK-0509-□-DF-I-4		LSXK-0573-□-DF-I-4					
Power consumption	0.3 W		1 W		1.6 W		2.1 W		2.4 W					
Model No.	LSXK-0702-□-DF-I-4		LSXK-0823-□-DF-I-4		LSXK-1008-□-DF-I-4		LSXK-1137-□-DF-I-4		LSXK-1451-□-DF-I-4					
Power consumption	3 W		3.5 W		4.3 W		4.9 W		6.3 W					
Light source color	N 5000K		W 4000K		WW 3500K		L30 3000K		L27 2700K		L24 2400K		L21 2100K	
@1008mm	Ra 93 ○ 213 lm		Ra 94 ○ 213 lm		Ra 94 ○ 204 lm		Ra 93 ○ 199 lm		Ra 93 ○ 190 lm		Ra 94 ○ 177 lm		Ra 90 ○ 166 lm	
Luminaire efficacy	60.9 lm/W		60.9 lm/W		58.3 lm/W		56.9 lm/W		54.3 lm/W		40.6 lm/W		47.4 lm/W	


General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length per circuit	6m
Material (body)	Polycarbonate, Aluminum
Attachments	① Multiclip 3 pcs for 702mm or shorter 5 pcs for 823mm or longer
Option parts	① Multiclip ② Liftclip ③ Outerclip ④ ⑤ Magnet set ⑥ Power supply cable ⑦ Joint cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

External dimensions

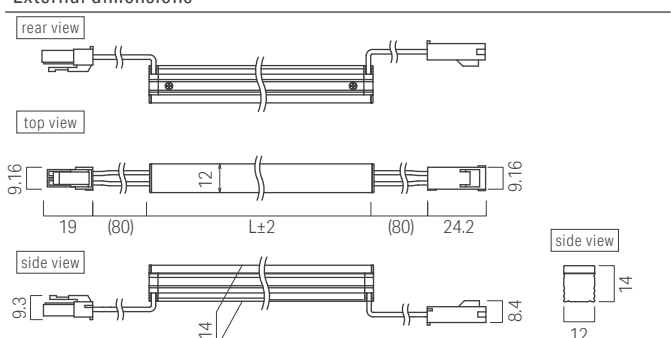

Cross sectional view when installing optional items

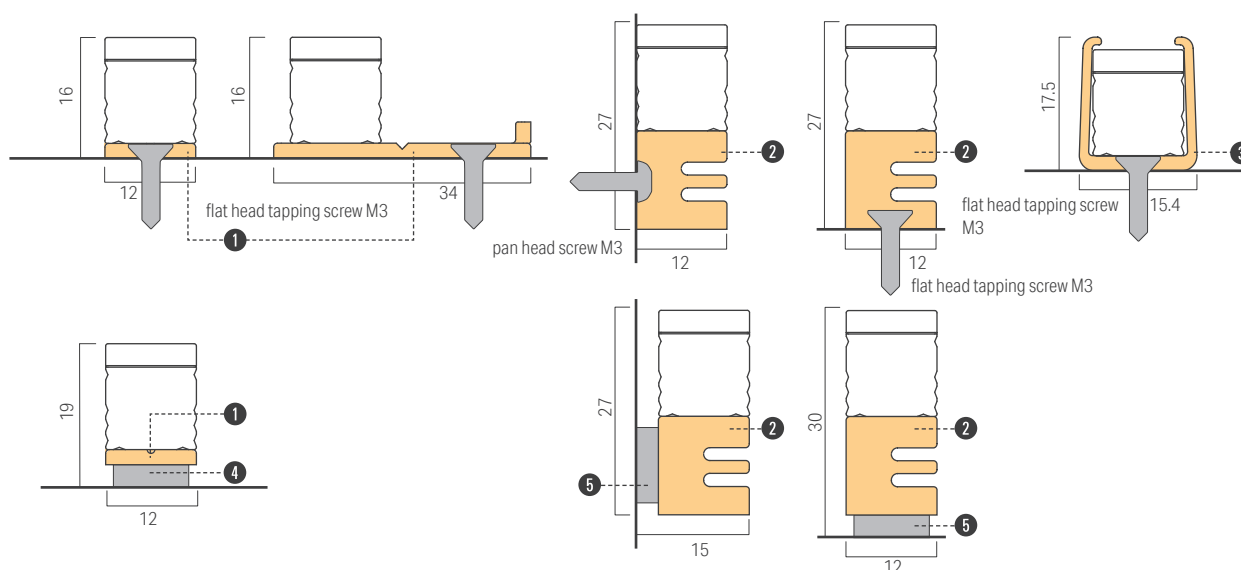

Option parts


1 Multiclip K for silux Attachment

Model No : LSX-PTM-C

Attached with LED fixture
3 pcs for 702mm or shorter
5 pcs for 823mm or longer

For extra order
3pcs/bag

For magnet installation,
please refer the required number
of clip to the table on P.139.




2 Liftclip for silux

Model No : LSX-PTL
2 pcs/1 bag

Liftclip is for hiding the connector
behind the LED fixture.
There are two directions
of fixing the liftclip.


For magnet installation,
please refer the required number
of clip to the table on P.139.



3 Outclip for silux

Model No : LSX-PT-A
5 pcs/1 bag

Outclip is for the downwards
emitting installation.




for multiclip installation

4 Magnet Set A

Model No : MG-A
5 pcs/1 bag


Used for installing LED fixture with 1 Multiclip clip on metal plate.
Metal plate is required by installer.

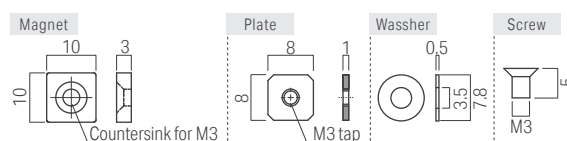

5 Magnet Set L

Model No : MG-L
10 pcs/1 bag

Used for installing LED fixture with 2 Lift clip on metal plate.
Metal plate is required by installer.

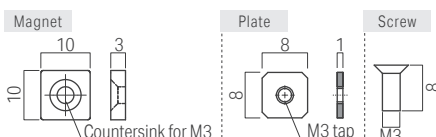


Power supply cable

6 Power supply cable 3M

Model No : CAD-3000-MCNN-I

1 pcs per circuit for connecting the LED fixture
to power supply or dimmer driver.




Joint cable

7 Joint cable 1M

Model No : CAD-1000-MCFC-I

Joint cable between two LED fixtures




Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
13.3 W/m	8.1 W/m	4.3 W/m	50W power supply
~2.6 m	~4.3 m	~8.7 m*	
~5.2 m	~8.7 m*	~17.5 m*	
~7.8 m*	~13.1 m*	~26.2 m*	
			100W power supply
			150W power supply


Installing the product

Multiclip K installation: bottom fixing


Recommended screw:
flat head screw M3

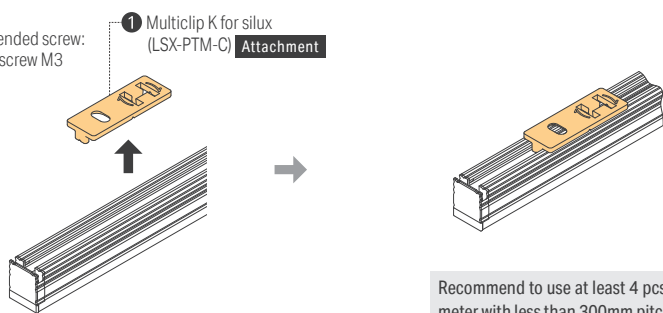


Recommend to use at least 4 pcs per meter with less than 300mm pitch.

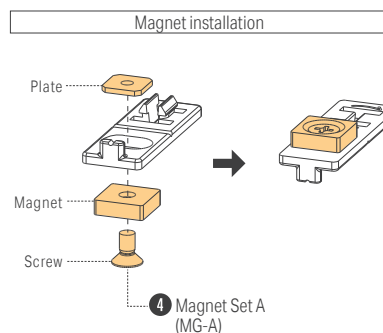


Multiclip K installation: side fixing

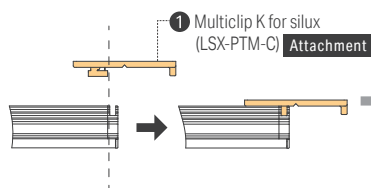


Insert the Multiclip at the spot shown in the above diagram. Ensure click sound when inserting.



Rotate the Multiclip in 90 degrees in the direction as the arrow mark shown on the back of the Multiclip.




Slide the Multiclip to the desired fixing position.



Use the recommended screws supplied by installer to fix the Multiclip with the LED fixture. (Flat head screws M3 recommended.)

Recommend to use at least 4 pcs per meter with less than 300mm pitch.

Liftclip installation: Standard installation direction




2 Liftclip for silux (LSX-PTL)


Recommended screw: flat head screw M3

Recommend to use at least 4 pcs per meter with less than 300mm pitch.

Note: different screw type are required for different installation side.

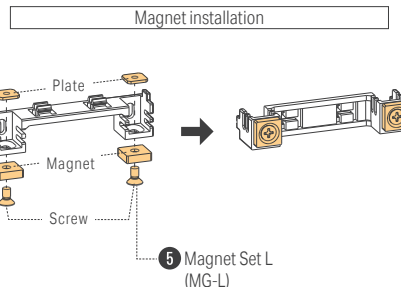

Liftclip installation: Horizontal installation direction




2 Liftclip for silux (LSX-PTL)

Recommended screw: pan head screw M3


Recommend to use at least 4 pcs per meter with less than 300mm pitch.

Note: different screw type are required for different installation side.

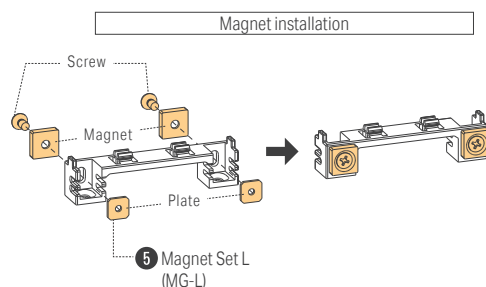

Outerclip installation

Recommended screw:
flat head screw M3

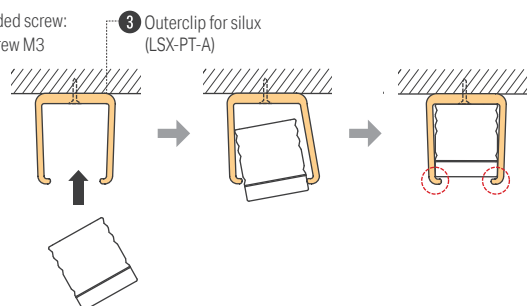


Recommend to use at least 4 pcs per meter with less than 300mm pitch.


Installing the product

For vertical installation

Bottom

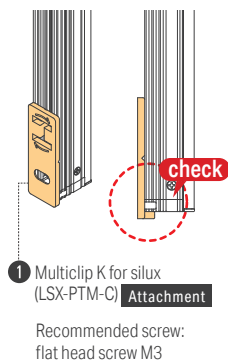


Top

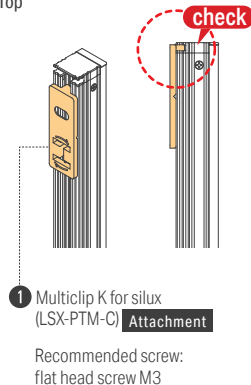

For vertical installation, make sure the top and bottom of LED fixture hook on the edge of the Multiclip K in accordance with the diagram.
Caution: If the weight of the LED fixture is not supported by the edge of the Multiclip, it may slide down and fall.


For recessed installation

With Multiclip

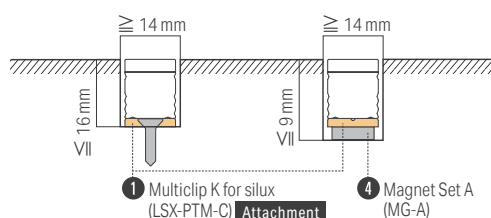


When the LED fixture is recessed on the wall/ceiling/furniture, make enough clearance or consider heat dissipation for releasing the heat of the LED fixture.

With Liftclip

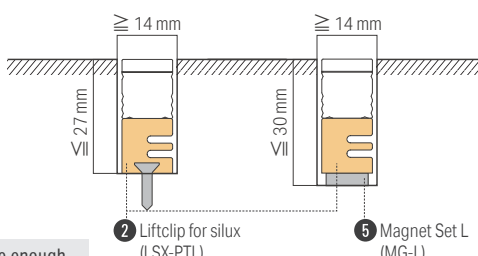

With Outerclip



At least 25.4 mm width of slit shall be provided to allow the outer clip to open when the luminaire is inserted.

Recommended number of Mounting clips and magnets

Fixture length(mm)	1 Attachment multi clip	1 Multi clip	4 Magnet set A	2 Lift clip	5 Magnet set L
74	3 pcs	1 pcs	1 pcs	1 pcs	2 pcs
259	3 pcs	2 pcs	2 pcs	2 pcs	4 pcs
388	3 pcs	2 pcs	2 pcs	2 pcs	4 pcs
509	3 pcs	2 pcs	2 pcs	2 pcs	4 pcs
573	3 pcs	3 pcs	3 pcs	3 pcs	6 pcs
702	3 pcs	3 pcs	3 pcs	3 pcs	6 pcs
823	5 pcs	4 pcs	4 pcs	4 pcs	8 pcs
1008	5 pcs	4 pcs	4 pcs	4 pcs	8 pcs
1137	5 pcs	4 pcs	4 pcs	4 pcs	8 pcs
1451	5 pcs	5 pcs	5 pcs	5 pcs	10 pcs
	Unit of order	3pcs/bag	5pcs/bag	2pcs/bag	10pcs/bag

(mm)	
0074	
0259	
0388	
0509	
0573	
0702	
0823	
1008	
1137	
1451	

Installing the product

Recommended number of Outer clips

	Fixture length(mm)	③ Outer clip
0074	74	1 pcs
0259	259	2 pcs
0388	388	2 pcs
0509	509	2 pcs
0573	573	3 pcs
0702	702	3 pcs
0823	823	4 pcs
1008	1008	4 pcs
1137	1137	4 pcs
1451	1451	5 pcs
		5pcs/bag

(mm)

0074
37
74

0259
29.5 200 29.5
259

0388
44.5 300 44.5
388

0509
104.5 300 104.5
509

0573
36.5 250 250 36.5
573

0702
51 300 300 51
702


0823
36.5 250 250 250 36.5
823

1008
84 280 280 280 84
1008


1137
118.5 300 300 300 118.5
1137

1451
125.5 300 300 300 300 125.5
1451

System configuration diagram

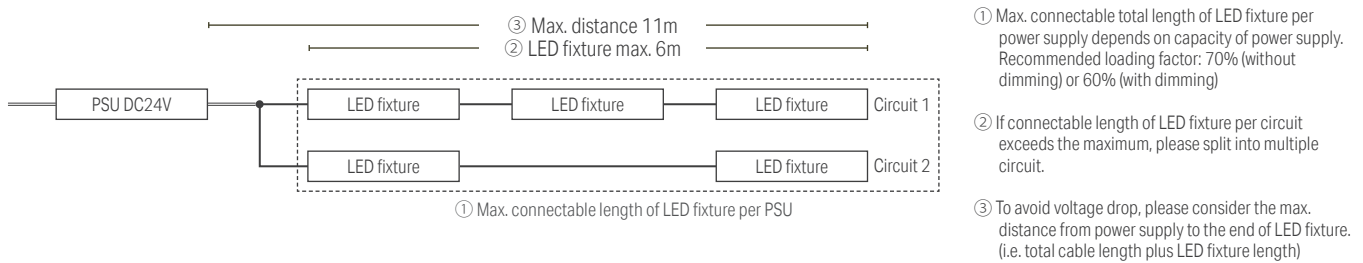

Distance from wall

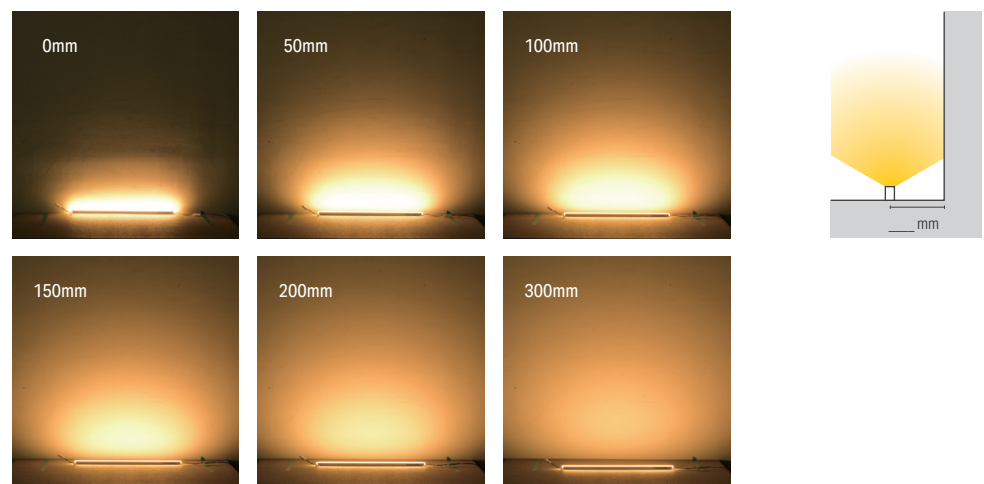


5000K 4000K 3500K 3000K 2700K 2400K 2100K

[illegible]

Figure 1 is a graph showing the relationship between illuminance (lx) and distance (m) for different 1/2 illuminance angles. The x-axis represents distance in meters (3m to 0), and the y-axis represents illuminance in lux (lx) on a logarithmic scale (1 to 1000). Two angles are highlighted: 64° (orange line) and 63° (dashed orange line). The graph shows that for a given distance, the illuminance is higher for a larger angle. A table on the right lists illuminance values for distances of 1000, 500, 200, 100, 50, and 20 meters.


Distance (m)	Illuminance (lx) for 64°	Illuminance (lx) for 63°
1000	11	10
500	46	40
200	186	160
100	744	640
50	2976	2560
20	11904	10240



5000K 4000K 3500K 3000K 2700K 2400K 2100K

LSXK-1008-N-DF-I-8

Cornice lighting-1 CH=2800

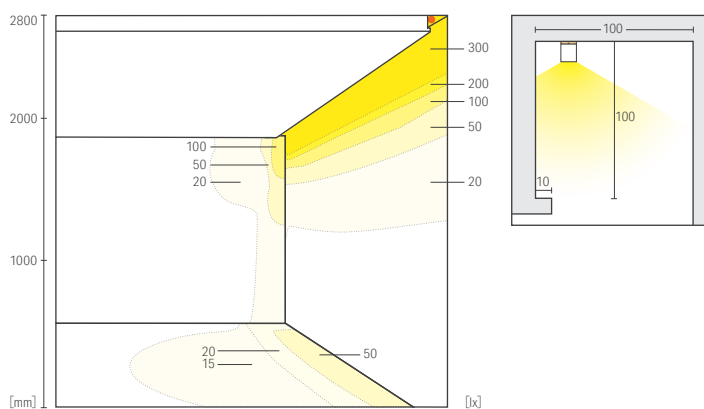

Illuminance data



LSXK-4 Luci silux K


Color temperature

5000K 4000K 3500K 3000K 2700K 2400K 2100K

Direct horizontal surface light intensity distribution chart


LSXK-1008-N-DF-I-4

Light source color 5000K
Brightness 71 cd
Luminous flux 213 lm
Color rendering index Ra 93




LSXK-1008-W-DF-I-4

Light source color 4000K
Brightness 71 cd
Luminous flux 213 lm
Color rendering index Ra 94




LSXK-1008-WW-DF-I-4

Light source color 3500K
Brightness 68 cd
Luminous flux 204 lm
Color rendering index Ra 94




LSXK-1008-L30-DF-I-4

Light source color 3000K
Brightness 67 cd
Luminous flux 199 lm
Color rendering index Ra 93




LSXK-1008-L27-DF-I-4

Light source color 2700K
Brightness 64 cd
Luminous flux 190 lm
Color rendering index Ra 93




LSXK-1008-L24-DF-I-4

Light source color 2400K
Brightness 59 cd
Luminous flux 177 lm
Color rendering index Ra 94




LSXK-1008-L21-DF-I-4

Light source color 2100K
Brightness 56 cd
Luminous flux 166 lm
Color rendering index Ra 90




Recommend dimensions and illumination distributions


Cornice lighting-1 CH=2800

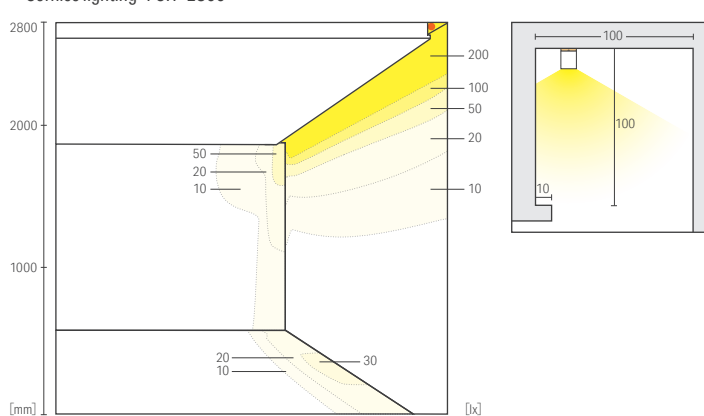

Cornice lighting-2 CH=2800

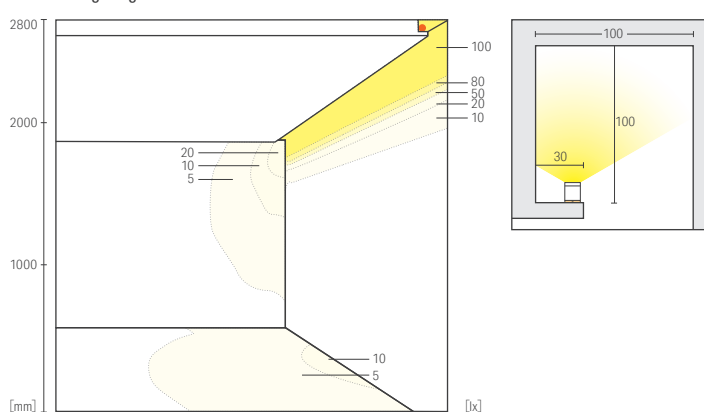

Cove lighting CH=2800

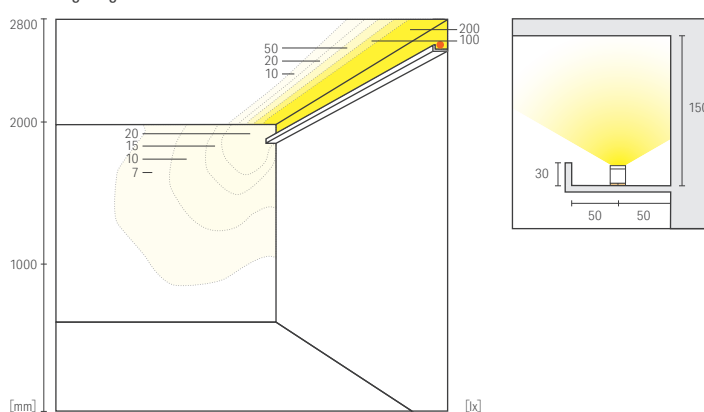

Luci silux® wide K

LSXWK




ODDS
Location: Hong Kong
Architect office: LUBUDS GROUP
Lighting design: Lighting Planners Associates (HK) Ltd.



Senri Chuo CIELIA TOWER
Location: Japan
Owner: Kanden Realty & Development Co.,Ltd. / The Kansai Electric Power Company, Incorporated

Architect office: KAN DESIGNING OFFICE LTD.
Lighting design: WORKTECH CORPORATION
Photo: Through Kanden Realty & Development Co.,Ltd.

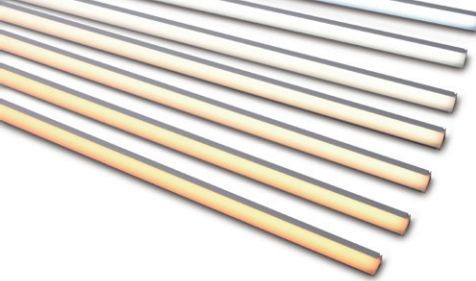

Luci silux® wide K

12×18mm homogeneous crescent section rigid light
with wide light distribution
3 different power consumption options to support energy saving project requirement
With various length types and accessories ideal
for a wide range of applications such as shelf and cove lighting

Specifications

Dimensions




Cross section : W18×H12 mm
Length : 10 types of fixed length

1451	1173
1008	823
573	509
388	259
74	

Electrical & Output

Power Consumption (W/m)	13.3	8.1	4.3
Luminous flux @ 3000K (lm/m)	759	551	261

Color temperature




silux wide K has a quarter-circle cross-section ideal for cove and shelf lighting. The light distribution is tilted so that can be illuminated widely and efficiently.

Features



To create a continuous line, cables can be placed behind or to the side.




Accessories

Multiclip



Multiclip



Multiclip+Magnet



Liftclip




Liftclip+Magnet




Outerclip




Available for both upward and downward




For side mounting/cove lighting
(Included item)




For side mounting/cove lighting
(Included item)
Quick installation as the clip is attached to the LED fixture first, rotated 90° and screwed in from the side of the LED fixture.





For side mounting with magnets
To mount the LED fixture on a metal or steel. Easy attach and detach for maintenance.



For surface/side mounting
The connectors fit inside the clip.



For surface/side mounting with magnets
To mount the LED fixture on a metal or steel. Easy attach and detach for maintenance.



For surface/downward mounting/
cove lighting
Easy attach and detach for maintenance.

Project reference





Esthe Pro Labo GINZA
Location: Japan
Architect office: LOTUS-DESIGN TAKUYA SAOTOME
Factor and C SHINICHI INOUE

Lighting Design: ODELIC CO., LTD. YURIE KATAOKA
Construction: DIGWORKS22 Co., Ltd.
Photo: Esthe Pro Labo Co., Ltd.

Simulation for shelf lighting

Wide 1,200 mm
@ 3000K

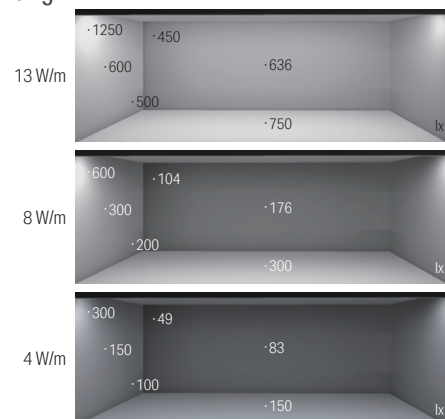

LSXWK

Color management
MacAdam 3 step



3 years warranty

- Homogeneous rigid light with a quarter-circle shape
- 3 different wattage, 10 types of length
- Ideal for shelf and cove light by tilted light distribution

Model No.

LSXWK -



- DF -



Product Name

Length

Light source color

Cover Type

Environment

Wattage

LSXWK

0074 0702
0259 0823
0388 1008
0509 1137
0573 1451

N : Natural white
W : White
WW : Warm white 3500K
L30 : Warm white 3000K
L27 : Warm white 2700K
L24 : Warm white 2400K
L21 : Warm white 2100K


DF : Diffuser

I : Indoor

13: 13.3W/m
8: 8.1W/m
4: 4.3W/m

Light Intensity

Refer to P.151



Specification

Length	0074	0259	0388	0509	0573
Fitting length(L)	74 mm	259 mm	388 mm	509 mm	573 mm
Weight	17 g	47 g	79 g	90 g	108 g
Length	0702	0823	1008	1137	1451
Fitting length(L)	702 mm	823 mm	1008 mm	1137 mm	1451 mm
Weight	120 g	140 g	170 g	192 g	240 g

13.3 W/m series

Model No.	LSXWK-0074-□-DF-I-13		LSXWK-0259-□-DF-I-13		LSXWK-0388-□-DF-I-13		LSXWK-0509-□-DF-I-13		LSXWK-0573-□-DF-I-13					
Power consumption	0.7 W		3.3 W		5.2 W		6.6 W		7.6 W					
Model No.	LSXWK-0702-□-DF-I-13		LSXWK-0823-□-DF-I-13		LSXWK-1008-□-DF-I-13		LSXWK-1137-□-DF-I-13		LSXWK-1451-□-DF-I-13					
Power consumption	9.5 W		10.9 W		13.3 W		15.2 W		19.5 W					
Light source color	N 5000K		W 4000K		WW 3500K		L30 3000K		L27 2700K		L24 2400K		L21 2100K	
@1008mm	Ra 93 ○ 811 lm		Ra 94 ○ 811 lm		Ra 94 ○ 777 lm		Ra 93 ○ 759 lm		Ra 93 ○ 725 lm		Ra 94 ○ 673 lm		Ra - ○ - lm	
Luminaire efficacy	75.8 lm/W		75.8 lm/W		72.6 lm/W		70.9 lm/W		67.8 lm/W		62.9 lm/W		54.9 lm/W	

8.1 W/m series

Model No.	LSXWK-0074-□-DF-I-8		LSXWK-0259-□-DF-I-8		LSXWK-0388-□-DF-I-8		LSXWK-0509-□-DF-I-8		LSXWK-0573-□-DF-I-8					
Power consumption	0.5 W		2.0 W		3.1 W		4 W		4.6 W					
Model No.	LSXWK-0702-□-DF-I-8		LSXWK-0823-□-DF-I-8		LSXWK-1008-□-DF-I-8		LSXWK-1137-□-DF-I-8		LSXWK-1451-□-DF-I-8					
Power consumption	5.7 W		6.6 W		8.1 W		9.2 W		11.8 W					
Light source color	N 5000K		W 4000K		WW 3500K		L30 3000K		L27 2700K		L24 2400K		L21 2100K	
@1008mm	Ra 93 ○ 589 lm		Ra 94 ○ 589 lm		Ra 94 ○ 564 lm		Ra 93 ○ 551 lm		Ra 93 ○ 526 lm		Ra 94 ○ 488 lm		Ra 90 ○ 426 lm	
Luminaire efficacy	89.2 lm/W		89.2 lm/W		85.5 lm/W		83.5 lm/W		79.7 lm/W		73.9 lm/W		64.5 lm/W	


4.3 W/m series

Model No.	LSXWK-0074-□-DF-I-4		LSXWK-0259-□-DF-I-4		LSXWK-0388-□-DF-I-4		LSXWK-0509-□-DF-I-4		LSXWK-0573-□-DF-I-4					
Power consumption	0.3 W		1 W		1.6 W		2.1 W		2.4 W					
Model No.	LSXWK-0702-□-DF-I-4		LSXWK-0823-□-DF-I-4		LSXWK-1008-□-DF-I-4		LSXWK-1137-□-DF-I-4		LSXWK-1451-□-DF-I-4					
Power consumption	3 W		3.5 W		4.3 W		4.9 W		6.3 W					
Light source color	N 5000K		W 4000K		WW 3500K		L30 3000K		L27 2700K		L24 2400K		L21 2100K	
@1008mm	Ra 93 ○ 279 lm		Ra 94 ○ 279 lm		Ra 94 ○ 267 lm		Ra 93 ○ 261 lm		Ra 93 ○ 249 lm		Ra 94 ○ 231 lm		Ra 90 ○ 201 lm	
Luminaire efficacy	79.7 lm/W		79.7 lm/W		76.3 lm/W		74.6 lm/W		71.1 lm/W		66.0 lm/W		57.4 lm/W	


General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length per circuit	6m
Material (body)	Polycarbonate, Aluminum
Attachments	① Multiclip 3 pcs for 702mm or shorter 5 pcs for 823mm or longer
Option parts	① Multiclip ② Liftclip ③ Outerclip ④⑤ Magnet set ⑥ Power supply cable ⑦ Joint cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

External dimensions

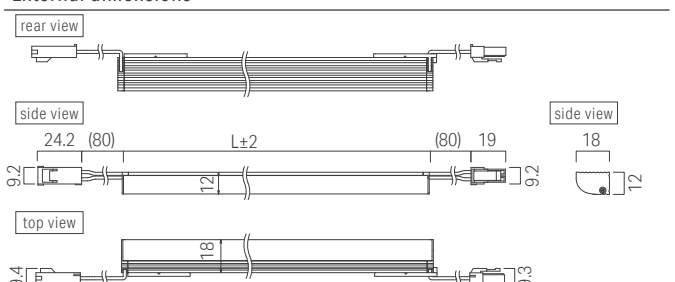

Cross sectional view when installing optional items

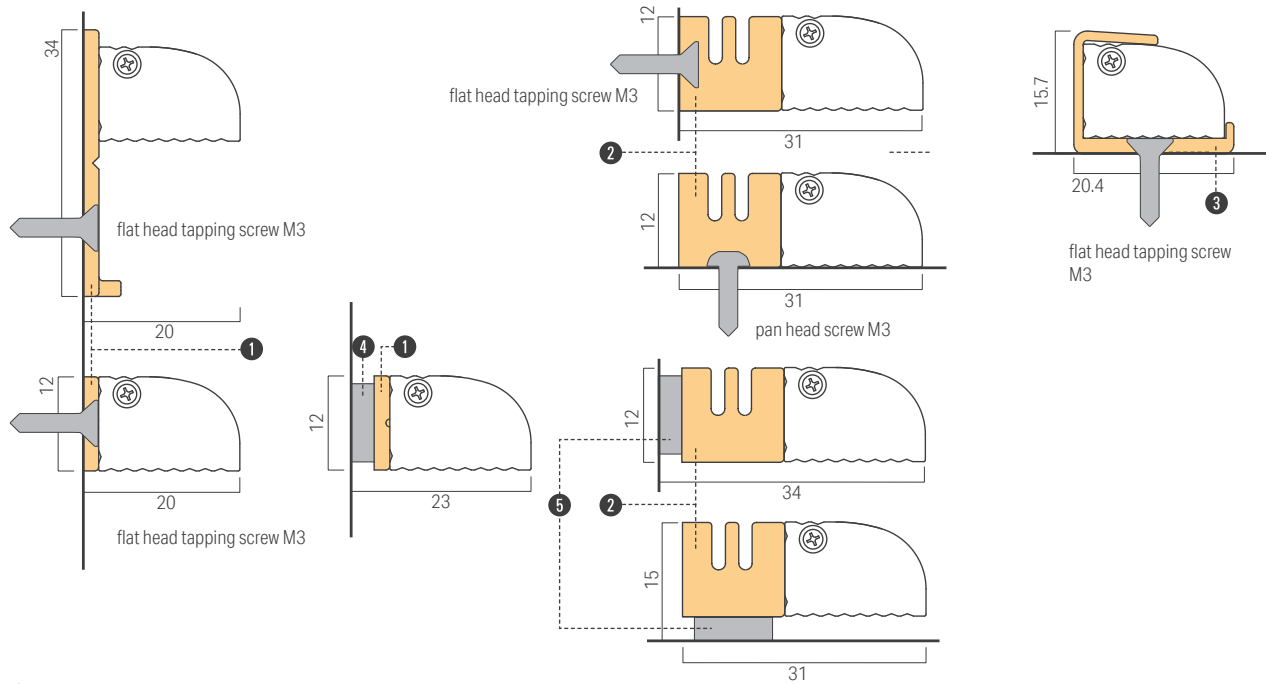


Option parts

1 Multiclip K for silux Attachment

Model No : LSX-PTM-C
Attached with LED fixture
3 pcs for 702mm or shorter
5 pcs for 823mm or longer

For extra order
3 pcs / bag

For magnet installation,
please refer the required number
of clip to the table on P.140.




2 Liftclip for silux

Model No : LSX-PTL
2 pcs / bag

Liftclip is for hiding the connector
behind the LED fixture.
There are two directions
of fixing the liftclip.

For magnet installation,
please refer the required number
of clip to the table on P.140.




3 Outerclip for silux wide

Model No : LSXW-PT-A
5 pcs / bag

Recommended number
1 pc for 74 mm
2 pcs for 259 mm to 509 mm
3 pcs for 573 mm and 702 mm
4 pcs for 823 mm to 1137 mm
5 pcs for 1451 mm

Outerclip is for the downwards emitting installation.



4 Magnet Set A

Model No : MG-A
5 pcs / bag


Used for installing LED fixture with 1 Multiclip clip on metal plate.
Metal plate is required by installer.



5 Magnet Set L

Model No : MG-L
10 pcs / bag


Used for installing LED fixture with 2 Lift clip on metal plate.
Metal plate is required by installer.

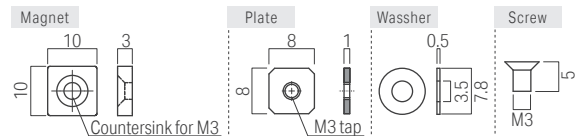

6 Power supply cable 3M

Model No : CAD-3000-MCNN-I


1 pc per circuit for connecting the LED fixture
to power supply or dimmer driver.



7 Joint cable 1M

Model No : CAD-1000-MCFC-I

Joint cable between two LED fixtures





Max. connectable length per power supply


Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
13.3 W/m	8.1 W/m	4.3 W/m	50W power supply
~2.6 m	~4.3 m	~8.7 m*	
~5.2 m	~8.7 m*	~17.5 m*	
~7.8 m*	~13.1 m*	~26.2 m*	
			100W power supply
			150W power supply

Installing the product



Multiclip K installation: bottom fixing

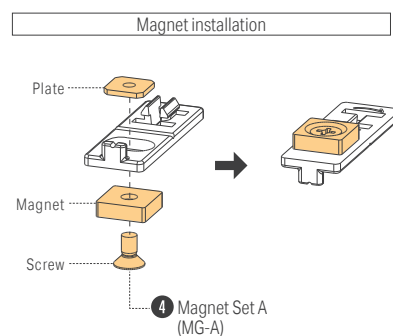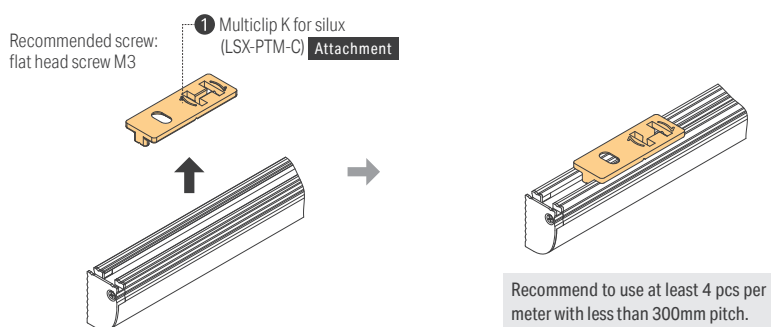



Multiclip K installation: side fixing

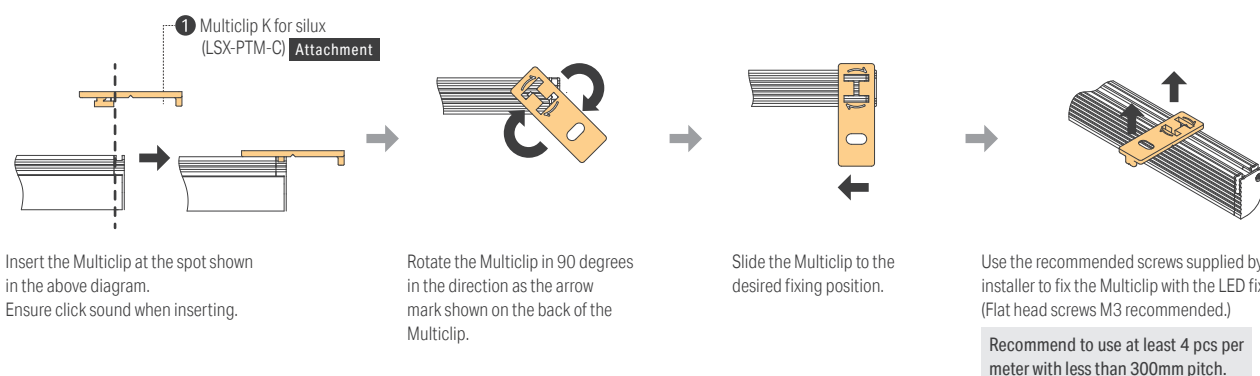

Liftclip installation: Standard installation direction

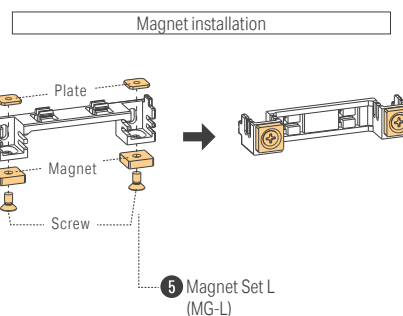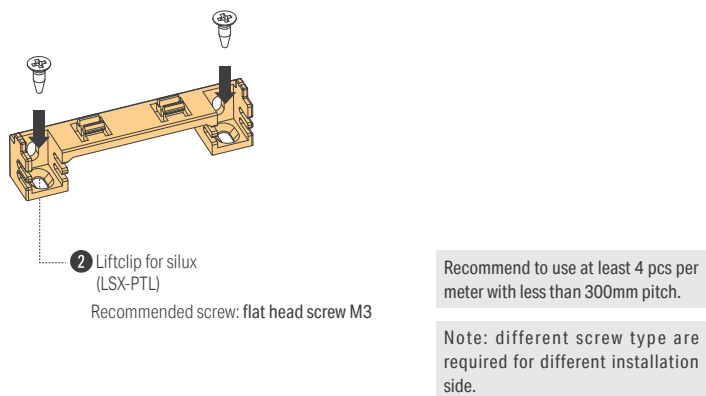

Liftclip installation: Horizontal installation direction

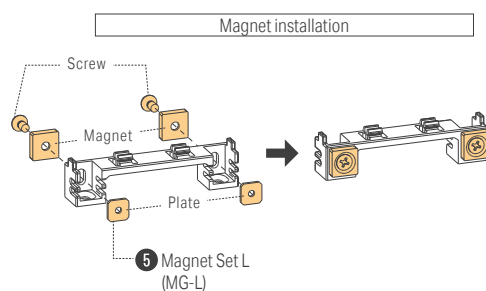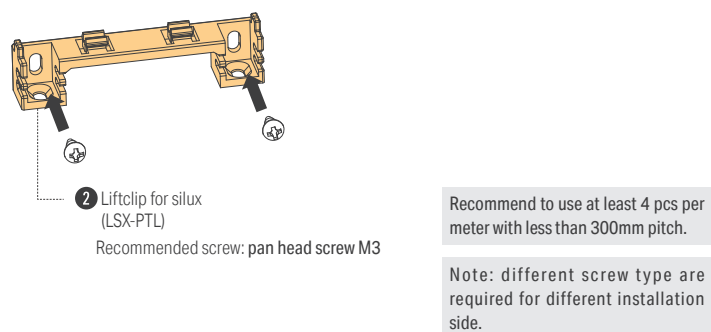


Installing the product

Outerclip installation

Recommended screw:
flat head screw M3

③ Outerclip for silux wide
(LSXW-PT-A)

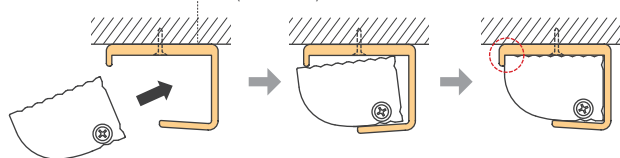


Recommend to use at least 4 pcs per
meter with less than 300mm pitch.

For vertical installation


Bottom

Top



① Multiclip K for silux
(LSX-PTM-C) Attachment

Recommended screw:
flat head screw M3



① Multiclip K for silux
(LSX-PTM-C) Attachment

Recommended screw:
flat head screw M3

For vertical installation, make sure the top and bottom of LED fixture hook on the
edge of the Multiclip K in accordance with the diagram.

Caution: If the weight of the LED fixture is not supported by the edge of the
Multiclip, it may slide down and fall.

Recommended number of Mounting clips and magnets

Fixture length(mm)	① Attachment multi clip	④ Magnet set A		⑤ Magnet set L	
		① Multi clip	② Lift clip	③ Multi clip	④ Magnet set L
74	3 pcs	1 pcs	1 pcs	1 pcs	2 pcs
259	3 pcs	2 pcs	2 pcs	2 pcs	4 pcs
388	3 pcs	2 pcs	2 pcs	2 pcs	4 pcs
509	3 pcs	2 pcs	2 pcs	2 pcs	4 pcs
573	3 pcs	3 pcs	3 pcs	3 pcs	6 pcs
702	3 pcs	3 pcs	3 pcs	3 pcs	6 pcs
823	5 pcs	4 pcs	4 pcs	4 pcs	8 pcs
1008	5 pcs	4 pcs	4 pcs	4 pcs	8 pcs
1137	5 pcs	4 pcs	4 pcs	4 pcs	8 pcs
1451	5 pcs	5 pcs	5 pcs	5 pcs	10 pcs
Unit of order		3pcs/bag	5pcs/bag	2pcs/bag	10pcs/bag

Fixture length(mm)	① Attachment multi clip	④ Magnet set A	⑤ Magnet set L
0074	3 pcs	1 pcs	2 pcs
0259	3 pcs	2 pcs	4 pcs
0388	3 pcs	2 pcs	4 pcs
0509	3 pcs	2 pcs	4 pcs
0573	3 pcs	3 pcs	6 pcs
0702	3 pcs	3 pcs	6 pcs
0823	5 pcs	4 pcs	8 pcs
1008	5 pcs	4 pcs	8 pcs
1137	5 pcs	4 pcs	8 pcs
1451	5 pcs	5 pcs	10 pcs

Installing the product

Recommended number of Outer clips

	Fixture length(mm)	③ Outer clip
(mm) 0074	74	1 pcs
0259	259	2 pcs
0388	388	2 pcs
0509	509	2 pcs
0573	573	3 pcs
0702	702	3 pcs
0823	823	4 pcs
1008	1008	4 pcs
1137	1137	4 pcs
1451	1451	5 pcs
		5pcs/bag

(mm)

0074

37

74

0259

29.5

200

29.5

259

0388

44.5

300

44.5

388

0509

104.5

300

104.5

509

0573

36.5

250

250

36.5

573

0702

51

300

300

51

702

0823

36.5

250

250

250

36.5

823

1008

84

280

280

280

84

1008

1137

118.5

300

300

300

118.5

1137

1451

125.5

300

300


300

300


125.5

1451


System configuration diagram

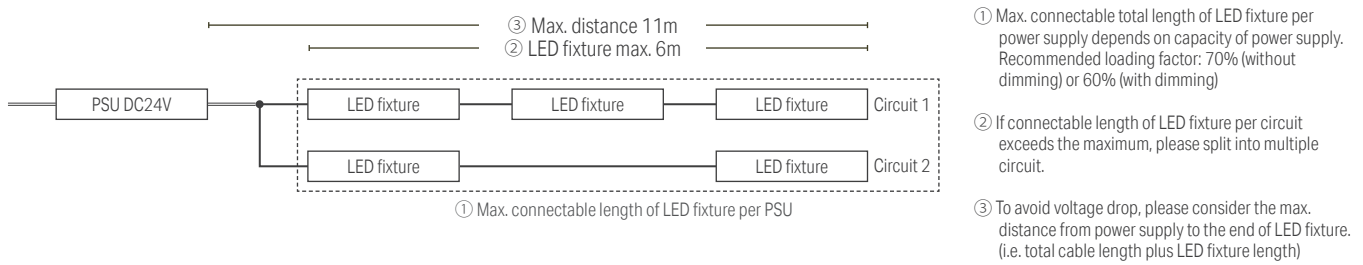

Distance from wall

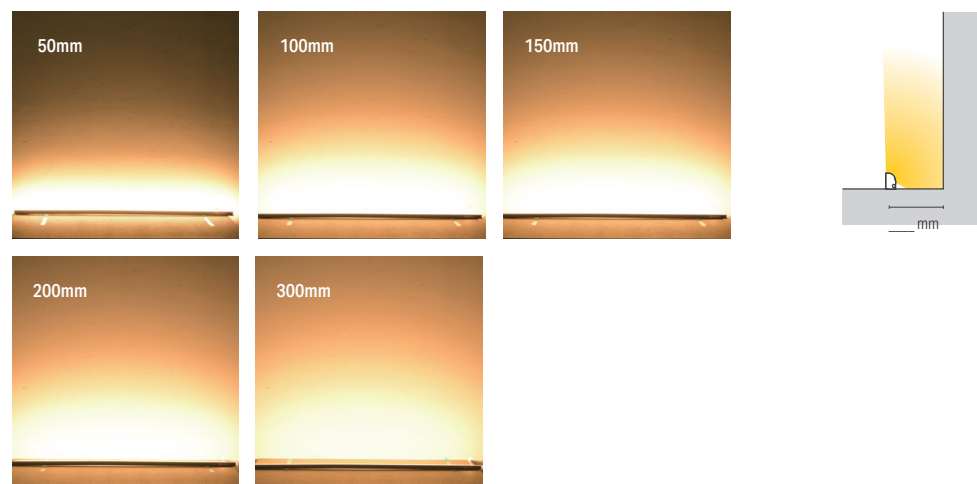

Illuminance data



LSXWK-13 Luci silux® wide K


Color temperature

5300K 4200K 3500K 3000K 2700K 2400K 2100K

Direct horizontal surface light intensity distribution chart


LSXWK-1008-N-DF-I-13

Light source color 5000K
Brightness 230 cd
Luminous flux 811 lm
Color rendering index Ra 93




LSXWK-1008-W-DF-I-13

Light source color 4000K
Brightness 230 cd
Luminous flux 811 lm
Color rendering index Ra 94




LSXWK-1008-WW-DF-I-13

Light source color 3500K
Brightness 220 cd
Luminous flux 777 lm
Color rendering index Ra 94




LSXWK-1008-L30-DF-I-13

Light source color 3000K
Brightness 215 cd
Luminous flux 759 lm
Color rendering index Ra 93




LSXWF-1008-L27-DF-I-13

Light source color 2700K
Brightness 206 cd
Luminous flux 725 lm
Color rendering index Ra 93




LSXWK-1008-L24-DF-I-13

Light source color 2400K
Brightness 191 cd
Luminous flux 673 lm
Color rendering index Ra 94




LSXWK-1008-L21-DF-I-13

Light source color 2100K
Brightness 191 cd
Luminous flux 673 lm
Color rendering index Ra 90




Recommend dimensions and illumination distributions


Cornice lighting-1 CH=2800

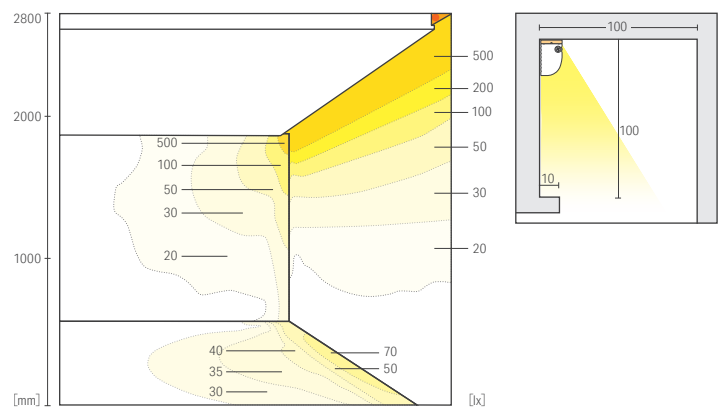

Cornice lighting-2 CH=2800

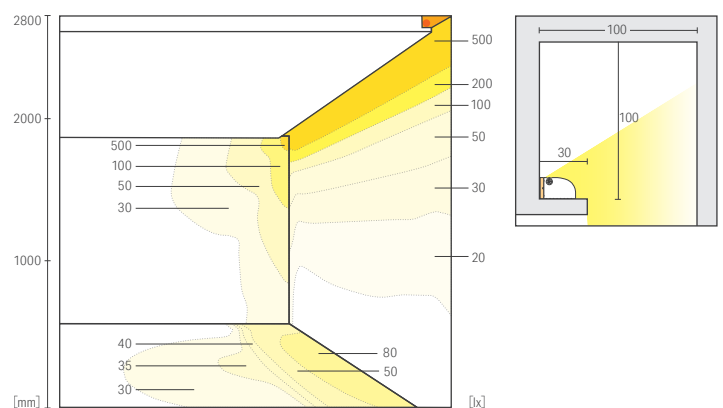

Cove lighting CH=2800

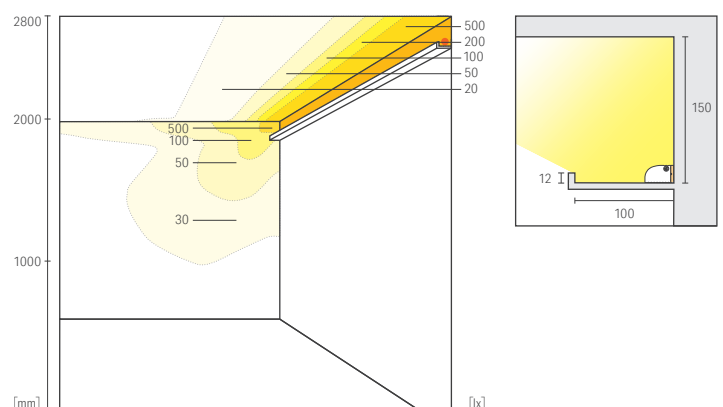

LSXWK

Vivoxo Graze

Vivoxo Graze THOF®

RECTA

THOF®


Creide® F / lens

silux® K

silux wide® K

nano line

Illuminance data



LSXWK-8 Luci silux® wide K


Color temperature

5300K 4200K 3500K 3000K 2700K 2400K 2100K

Direct horizontal surface light intensity distribution chart


LSXWK-1008-N-DF-I-8

Light source color 5000K
Brightness 167 cd
Luminous flux 589 lm
Color rendering index Ra 93




LSXWK-1008-W-DF-I-8

Light source color 4000K
Brightness 167 cd
Luminous flux 589 lm
Color rendering index Ra 94




LSXWK-1008-WW-DF-I-8

Light source color 3500K
Brightness 160 cd
Luminous flux 564 lm
Color rendering index Ra 94




LSXWK-1008-L30-DF-I-8

Light source color 3000K
Brightness 156 cd
Luminous flux 551 lm
Color rendering index Ra 93




LSXWF-1008-L27-DF-I-8

Light source color 2700K
Brightness 149 cd
Luminous flux 526 lm
Color rendering index Ra 93




LSXWK-1008-L24-DF-I-8

Light source color 2400K
Brightness 139 cd
Luminous flux 488 lm
Color rendering index Ra 94




LSXWK-1008-L21-DF-I-8

Light source color 2100K
Brightness 121 cd
Luminous flux 426 lm
Color rendering index Ra 90




Recommend dimensions and illumination distributions


Cornice lighting-1 CH=2800

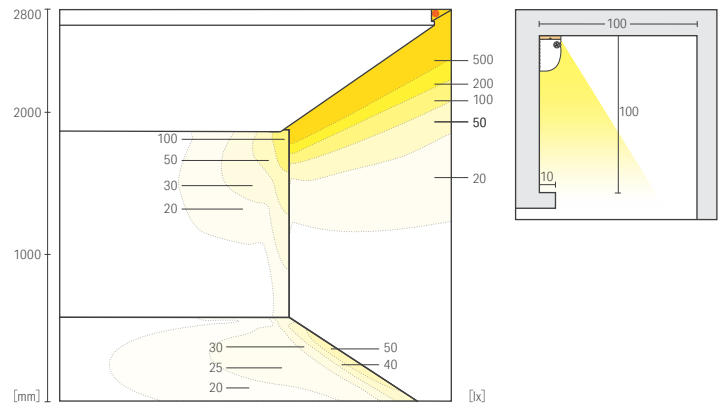


Cornice lighting-2 CH=2800

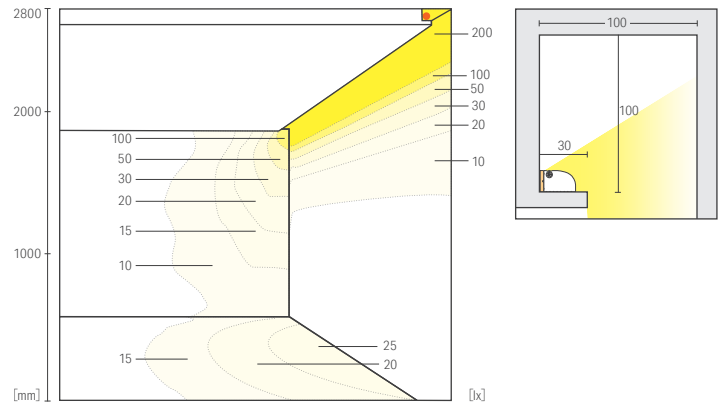

Cove lighting CH=2800

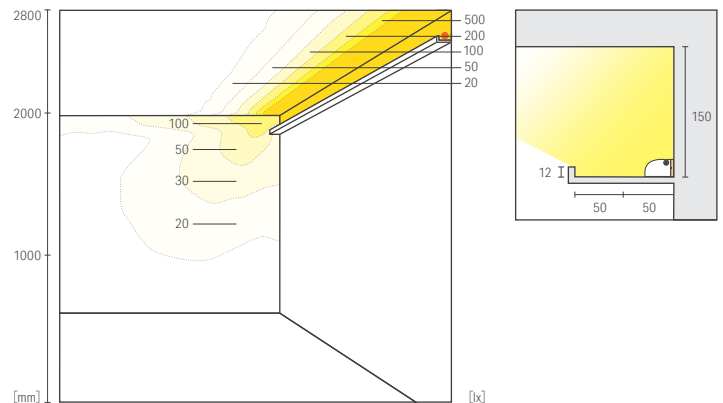

Illuminance data



LSXWK-4 Luci silux® wide K


Color temperature

5300K 4200K 3500K 3000K 2700K 2400K 2100K

Direct horizontal surface light intensity distribution chart


LSXWK-1008-N-DF-I-4

Light source color 5000K
Brightness 79 cd
Luminous flux 279 lm
Color rendering index Ra 93




LSXWK-1008-W-DF-I-4

Light source color 4000K
Brightness 79 cd
Luminous flux 279 lm
Color rendering index Ra 94




LSXWK-1008-WW-DF-I-4

Light source color 3500K
Brightness 76 cd
Luminous flux 267 lm
Color rendering index Ra 94




LSXWK-1008-L30-DF-I-4

Light source color 3000K
Brightness 74 cd
Luminous flux 264 lm
Color rendering index Ra 93




LSXWF-1008-L27-DF-I-4

Light source color 2700K
Brightness 71 cd
Luminous flux 249 lm
Color rendering index Ra 93




LSXWK-1008-L24-DF-I-4

Light source color 2400K
Brightness 66 cd
Luminous flux 231 lm
Color rendering index Ra 94




LSXWK-1008-L21-DF-I-4

Light source color 2100K
Brightness 57 cd
Luminous flux 201 lm
Color rendering index Ra 90




Recommend dimensions and illumination distributions


Cornice lighting-1 CH=2800

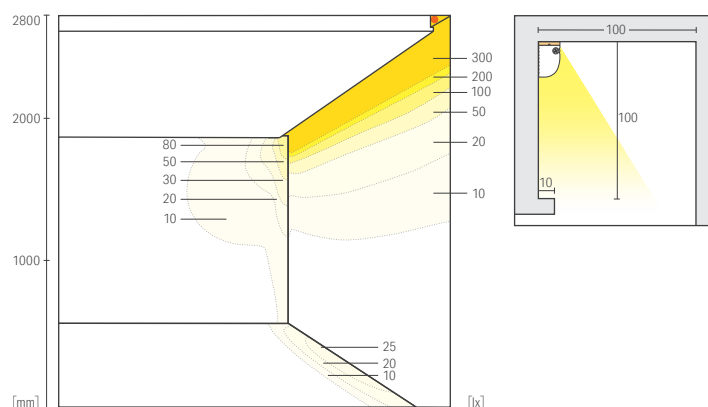

Cornice lighting-2 CH=2800

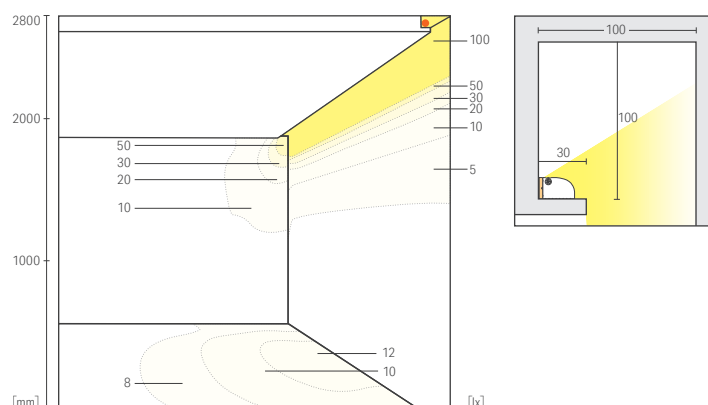

Cove lighting CH=2800

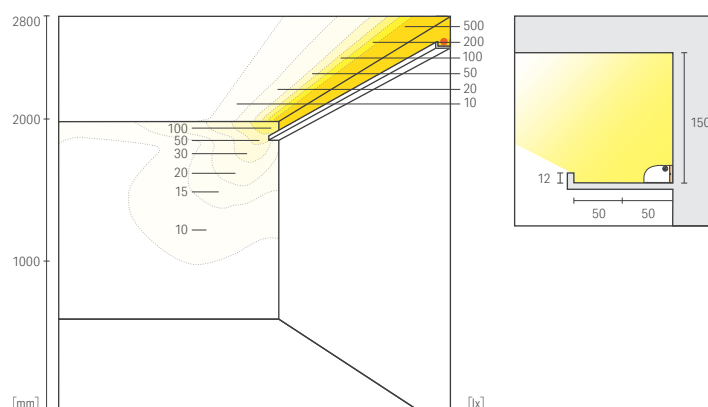

LSXWK

Vivoxo Graze

Vivoxo Graze THOF®

RECTA

THOF®

Creide® F / lens

silux® K

silux wide® K

nano line

Luci nano line

LNL




SHIBUYA SKY

Location: Japan

Architect office: Shibuya Station Area Maintenance Plan Joint Venture

Construction: Shibuya Station East Building Project New Building Construction Joint Venture, NOMURA Co., Ltd.

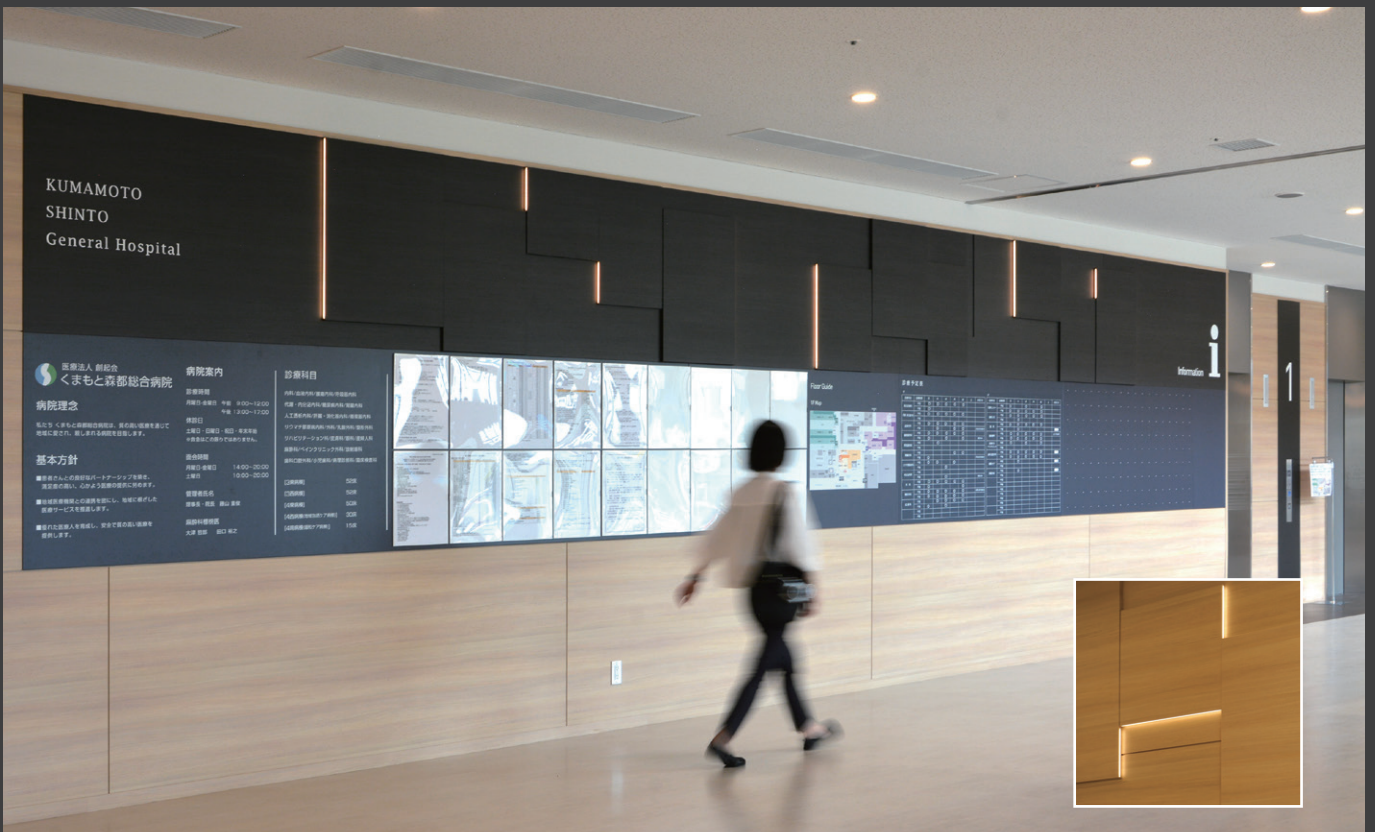

KUMAMOTO SHINTO General Hospital
Location: Japan
Architect office: MATSUO Corporation

Lighting Design: MATSUO Corporation
Lighting Art Construction: MYSA Co., Ltd.
Photo: MYSA Co., Ltd.



Luci nano line

Only 5.5mm light-emitting surface for recessed lighting
Smart form allows a unique line lighting to be installed in joinery, handrails, back of mirror etc.

Specifications

Dimensions

Cross section W 5.5 x H 22.8mm including clip
Length 10 types of fixed length

984	886
789	692
498	400
303	206
109	

Electrical & Output

Power Consumption (W/m)	7.3
Luminous flux @ 3000K (lm/m)	66


Color temperature

5300K	4000K	3500K	3000K	2700K	2400K
-------	-------	-------	-------	-------	-------

Ra 90


Non-slip clip for vertical installation

Magnet installation




Wall-embedded vertical line lighting

The directly exposed narrow line light source adds some spice to a space.

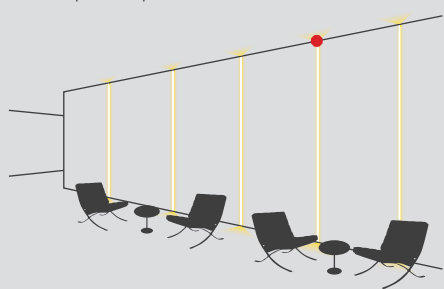

Detail




Example image of embedding




Staircase riser indirect lighting

Indirect lighting on staircase risers helps recognition of stair steps, and has an effect of increasing safety while walking.





Detail




POINT

Small indirect lighting source where reflecting surface is dot-less!




Headboard lighting

Multiple indirect lighting sources around a bed create a sense of depth and a space for relaxation.

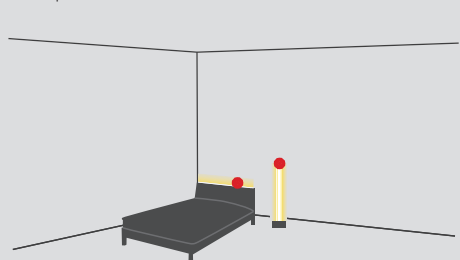


Detail




Handrail lighting

Light source embedded in a handrail shines on the wall and floor to increase visibility, resulting in prevention of falls while walking.




Wall-embedded horizontal line lighting


Horizontal line lighting provides a space with a sense of depth and expectation.



Project reference

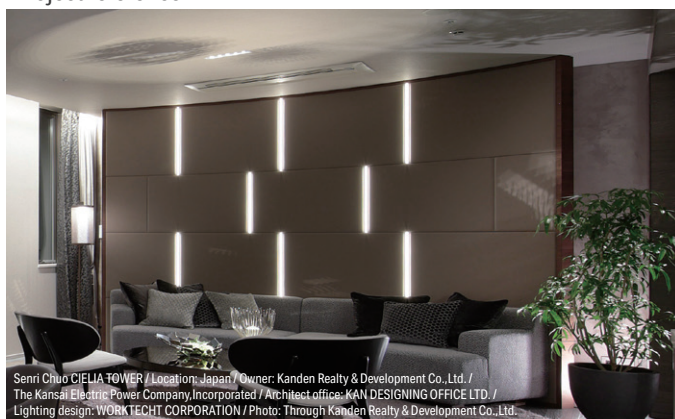

Senri Chuo CIELIA TOWER / Location: Japan / Owner: Kandens Realty & Development Co., Ltd. / The Kansai Electric Power Company, Incorporated / Architect office: KAN DESIGNING OFFICE LTD. / Lighting design: WORKTECH CORPORATION / Photo: Through Kandens Realty & Development Co., Ltd.

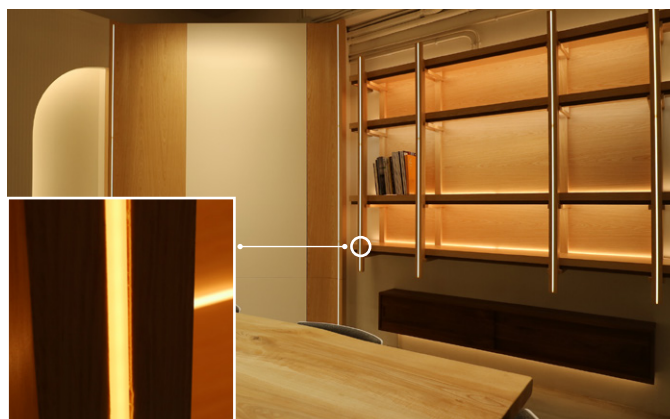


- 5.5mm width homogeneous rigid light with 10 length variations
- Ideal for recessed linear light for wall, ceiling and furniture
- Available for magnet installation



Model No.

LNL	-	<div></div> <div></div> <div></div> <div></div>	-	<div></div>	-	DF	-	I
Product Name	-	Length	-	Light source color	-	Cover Type	-	Environment
LNL		0109 0595 0206 0692 0303 0789 0400 0886 0498 0984		N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K		DF : Diffuser		I : Indoor

Light Intensity Refer to P.161



Specification


Length	0109	0206	0303	0400	0498	0595	0692	0789	0886	0984
Model No.	LNL-0109-□-DF-I	LNL-0206-□-DF-I	LNL-0303-□-DF-I	LNL-0400-□-DF-I	LNL-0498-□-DF-I	LNL-0595-□-DF-I	LNL-0692-□-DF-I	LNL-0789-□-DF-I	LNL-0886-□-DF-I	LNL-0984-□-DF-I
Power consumption	0.7W	1.4W	2.2W	2.9W	3.6W	4.3W	5.0W	5.8W	6.5W	7.2W
Fitting length(L)	109mm	206mm	303mm	400mm	498mm	595mm	692mm	789mm	886mm	984mm
Weight	20g	37g	52g	68g	83g	99g	114g	130g	145g	160g
Luminaire efficacy(2700K)	9.5 lm/W*	9.5 lm/W*	9.5 lm/W*	9.5 lm/W*	9.5 lm/W*	9.5 lm/W*	9.5 lm/W*	9.5 lm/W*	9.5 lm/W*	9.5 lm/W
Light source color	○ = Device inventory * = Equivalent									
D 7100K	-	-	-	-	-	-	-	-	-	-
N 5300K	○	○	○	○	○	○	○	○	○	○
W 4200K Ra92	○ 7lm*	○ 13lm*	○ 20lm*	○ 26lm*	○ 33lm*	○ 40lm*	○ 46lm*	○ 53lm*	○ 59lm*	○ 66lm
WW 3500K Ra91	○ 6lm*	○ 12lm*	○ 17lm*	○ 23lm*	○ 29lm*	○ 35lm*	○ 41lm*	○ 46lm*	○ 52lm*	○ 58lm
L30 3000K Ra87	○ 7lm*	○ 13lm*	○ 20lm*	○ 26lm*	○ 33lm*	○ 39lm*	○ 46lm*	○ 52lm*	○ 59lm*	○ 65lm
L27 2700K Ra87	○ 6lm*	○ 12lm*	○ 18lm*	○ 24lm*	○ 30lm*	○ 35lm*	○ 41lm*	○ 47lm*	○ 53lm*	○ 59lm
L24 2400K Ra85	○ 5lm*	○ 10lm*	○ 16lm*	○ 21lm*	○ 26lm*	○ 31lm*	○ 36lm*	○ 42lm*	○ 47lm*	○ 52lm
L19 1900K	-	-	-	-	-	-	-	-	-	-

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length per circuit	5m
Material (body)	Polycarbonate, Aluminum
Attachments	① Mounting clip 2 pcs for the body installation 2 pcs for the end part installation
Option parts	① Mounting clip ② Magnet
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required


External dimensions

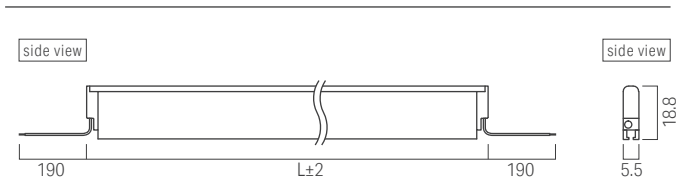

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~ 5 m	50W power supply
~ 10 m*	100W power supply
~ 14 m*	150W power supply

Cross sectional view when installing optional items

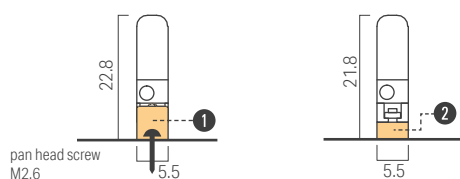

Option parts

1 Mounting clip A for nano line **Attachment**


Model No : LNL-PTA

Attached with LED fixture
2 pcs for the end part and 2 pcs for body part


For extra order
4 pcs for the end part and 4 pcs for body part per bag



The end part installation

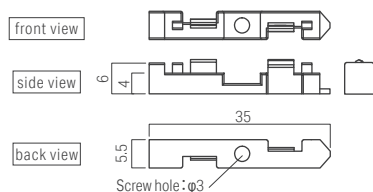

The body installation




2 Magnet for nano line

Model No : LNL-MG

10 pcs / bag

Recommended number of magnets
2 pcs for 109 mm to 303 mm
3 pcs for 400 mm to 595 mm
4 pcs for 692 mm to 984 mm


Used for installing LED fixture on metal plate.
Metal plate is required to supply by installer.
The magnets need to be fixed by installer.



Luci nano line


Installing the product

For horizontal installation

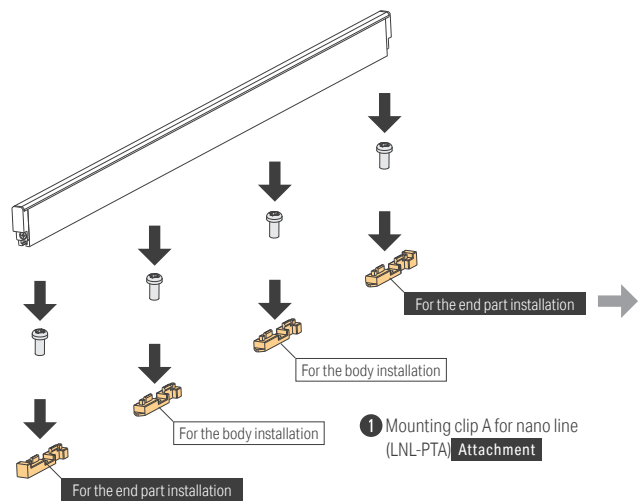

⚠ Cautions
Beware that there are two different types of fitting clips and one is for the main body and the other is for the end section.

⚠ Cautions
Ensure that the fitting clips for the end section are used.

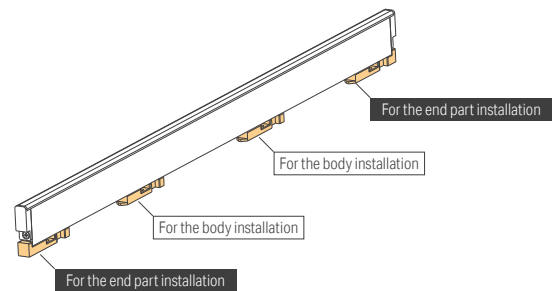

The mounting clip should be preset on the installation spot with screws supplied by installer. (Pan head screws M2.6 recommended)

Attach LED fixture onto the mounting clips until click sound.
Ensure that two mounting clips for the end section are installed at the end of LED fixture.


Mounting Clip A Recommended number of clips for the installation

Mounting Clip A	Length	0109	0206	0303	0400	0498	0595	0692	0789	0886	0984
For the end part installation		2	2	2	2	2	2	2	2	2	2
For the body installation		0	0	0	1	1	1	2	2	2	2

For vertical installation


For vertical installation, make sure the top and bottom of LED fixture hook on the edge of the mounting clips in accordance with the diagram.
Caution: If the weight of the LED fixture is not supported by the edge of the mounting clips at the bottom, it may slide down and fall.

1 Mounting clip A for nano line (LNL-PTA) Attachment

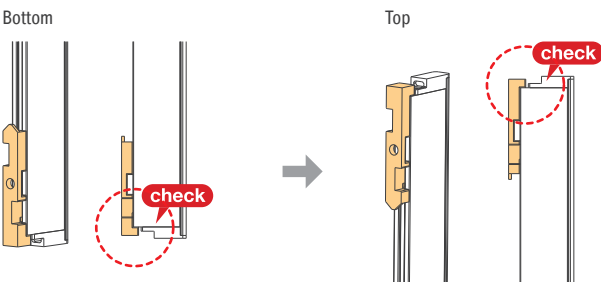

Magnet installation

2 Magnet for nano line (LNL-MG)

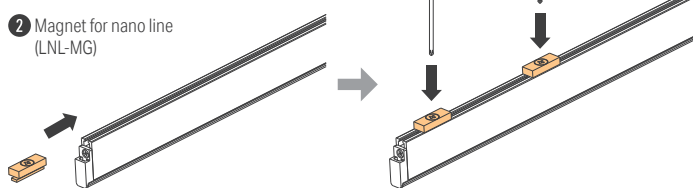

Loosen the screw of the magnet and slide it into the groove at the back of LED fixture.


Tighten the screw of the magnet by using small screwdriver at decided position.

⚠ Cautions

Small screwdriver is needed to tighten the screws of the magnets.

⚠ Cautions


Do not install LED fixture with magnets downwardly as it might fall.

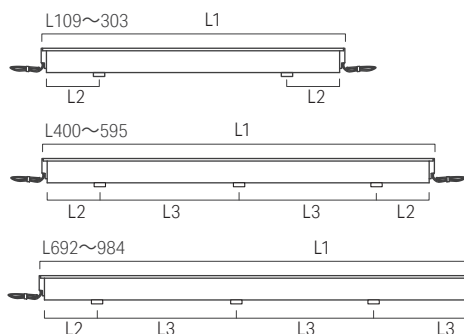


Recommended number of magnets for the installation

	0109	0206	0303	0400	0498	0595	0692	0789	0886	0984
Number of magnets	2	2	2	3	3	3	4	4	4	4
Fitting length(L1)	109	206	303	400	498	595	692	789	886	984
Distance from the end of the LED fixture(L2)	25	25	25	25	25	25	25	25	25	25
Distance between magnets(L3)	-	-	-	171	220	269	211	244	276	309


Cross-sectional view A (Without light appliance)




Elevation view of opening

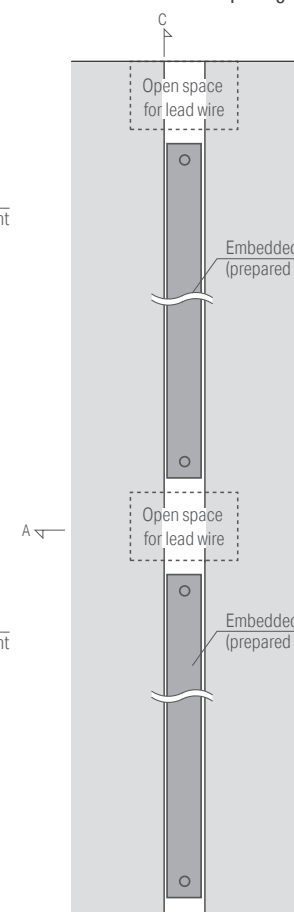


Cross-sectional view B (With light appliance)

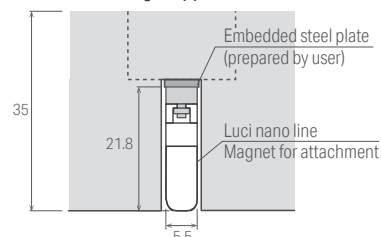

Elevation view after installation

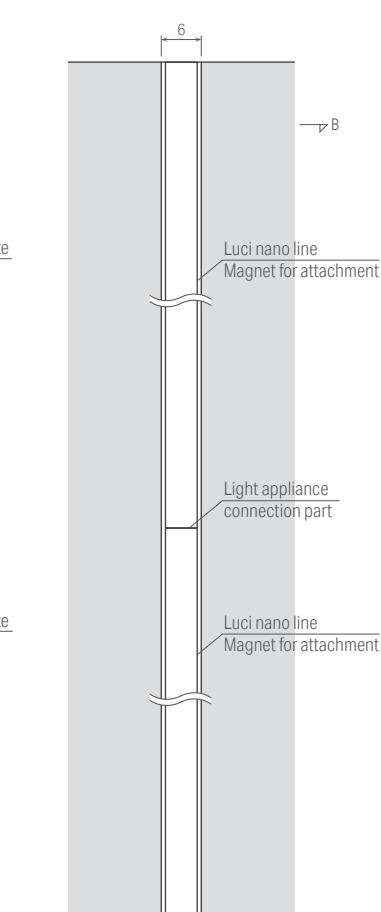


Cross-sectional view C

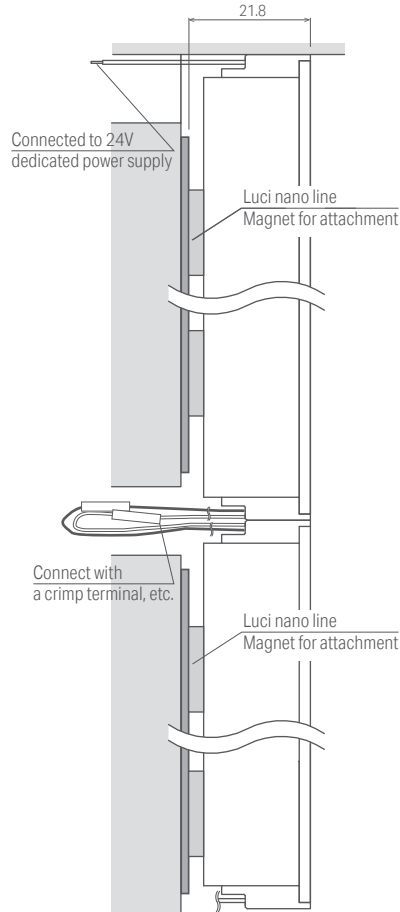


1/ Image of the cross section



2/ Image of the cross section



3/ Installation of the light appliance




4/ Opening for lead wire



5/ After installation



System configuration diagram

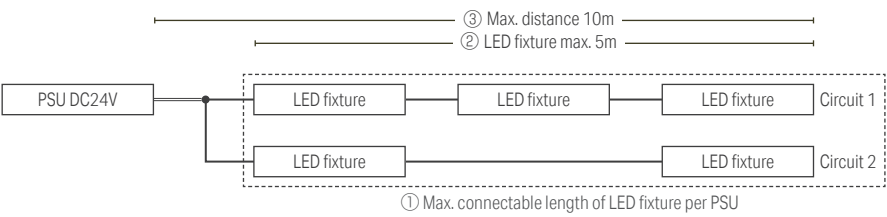

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Illuminance data



LNL Luci nano line


Color temperature

4200K 3500K 3000K 2700K 2400K

Direct horizontal surface light intensity distribution chart


LNL-0984-W-DF-I

Light source color 4200K
Brightness 16 cd
Luminous flux 66 lm
Color rendering index Ra 92




LNL-0984-WW-DF-I

Light source color 3500K
Brightness 15 cd
Luminous flux 58 lm
Color rendering index Ra 91




LNL-0984-L30-DF-I

Light source color 3000K
Brightness 16 cd
Luminous flux 65 lm
Color rendering index Ra 87




LNL-0984-L27-DF-I

Light source color 2700K
Brightness 15 cd
Luminous flux 59 lm
Color rendering index Ra 87



LNL-0984-L24-DF-I

Light source color 2400K
Brightness 13 cd
Luminous flux 52 lm
Color rendering index Ra 85



Luci Vivoxy FLEX IP67

LVF-0 **NEW**






Luci Vivoxo FLEX IP67

Flexible wall grazing light to beautifully accentuate the curved element with vertical and horizontal bending
Reduced unpleasant scalloping, applicable for a wide range of offset distances

Specifications

Dimensions


Cross section W27xH45 mm with mounting rail /parts
Custom length 135 to 2010 mm (125mm length increment)
15 types of fixed length with both sides or one side cable with IP67 connector

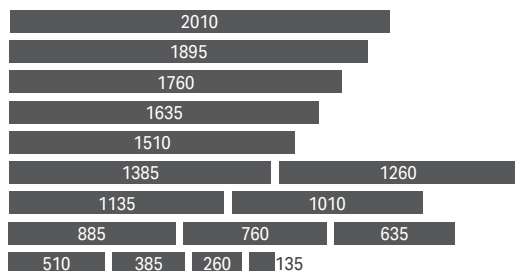


Electrical & Output

Power Consumption (W/m)	24	16
Luminous flux @ 3000K (lm/m), Optics SP2	1614	1076

Color temperature




Optics

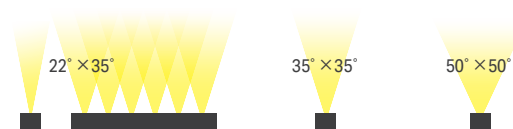

Min Bending radius


min. R 500mm with mounting parts in Top / Side bend
min. R 1000mm with bendable rail in Top bend

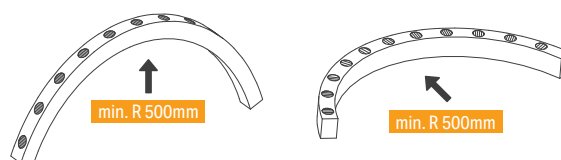

Features



3 body colours to match the finish
(Gray: for exterior use where direct exposure to sunlight)

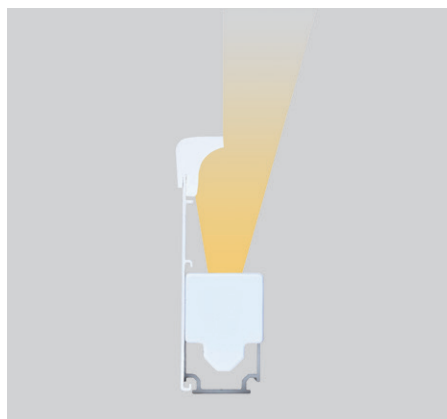

Bendable glare cut shield with silicone can be covered LED half to avoiding unexpected light spill, glare, light pollution for exterior



No scallop light on the wall even small offset thanks to diffused silicone

Application sample



LVF-0

NEW

Color management
MacAdam 3 step



- Wall grazing light for organic design
- Bendable Horizontal and Vertical in R500mm
- Adjustable bracket and Shield option



Model No.

LVF40




Product Name / LED pitch	Length	Lead Wire	Light source color	Beam angle	Environment	Power consumption	Body color
LVF40 : 40mm pitch	0125 1125 0250 1250 0375 1375 0500 1500 0625 1625 0750 1750 0875 1875 1000 2000	W : Both ends lead wire S : One end lead wire	D : Daylight white N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L22 : Warm white 2200K	SP2 : 22°×35° 35 : 35° 50 : 50°	O : Outdoor	24 : 24W/m 16 : 16W/m	G : Gray W : White B : Black* * Need MOQ 10M

Specification

Power consumption	24W/m	16W/m
Model No.	LVF40-1000□-□-□-□-0-24-□	LVF40-1000□-□-□-□-0-16-□
Fitting length	1010mm	1010mm
Weight	520g	520g
Luminaire efficacy (2700K)	66.9 lm/W	66.9 lm/W
Light source color@SP2	○ = Device inventory * = Equivalent	
D 6500K	Ra 85 ○ 1844 lm	Ra 85 ○ 1230 lm
N 5000K	Ra 84 ○ 1970 lm	Ra 84 ○ 1314 lm
W 4000K	Ra 94 ○ 1587 lm	Ra 94 ○ 1059 lm
WW 3500K	Ra 82 ○ 1880 lm	Ra 82 ○ 1253 lm
L30 3000K	Ra 92 ○ 1614 lm	Ra 92 ○ 1076 lm
L27 2700K	Ra 93 ○ 1605 lm	Ra 93 ○ 1071 lm
L22 2200K	Ra 81 ○ 1563 lm	Ra 81 ○ 1042 lm

Light distribution curve Refer to P.168

LVF40-1000W-L30-SP2-O-24-W



Size Variation

Length	0125	0250	0375	0500	0625	0750	0875	
Power consumption (24W/m 16W/m)	3W 2W	6W 4W	9W/m 6W/m	12W 8W	15W 10W	18W 12W	21W 14W	
Fitting length	135mm	260mm	385mm	510mm	635mm	760mm	885mm	
Length	1125	1250	1375	1500	1625	1750	1875	2000
Power consumption (24W/m 16W/m)	27W 18W	30W 20W/m	33W 22W	36W 24W	39W 26W	42W 28W	45W 30W	48W 32W
Fitting length	1135mm	1260mm	1385mm	1510mm	1635mm	1760mm	1885mm	2010mm

General Specification


Input voltage	DC24V
LED beam angle	22°×35°, 35°, 50°
Environment	In & Outdoor, IP67
Max. length per circuit	5m
Min. bending range	① Mounting rail + ③ ④ Glare cut shield/ Horizontal R1000mm ② Mounting parts / Horizontal,vertical R500mm
Material (body)	Silicone
Attachments	-
Option parts	① Mounting rail ② Mounting parts ③ ④ Glare cut shield ⑤ Bracket ⑥ Power supply cable ⑦ Joint cable
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

Max. connectable length per power supply


Length of LED fixture (70% loading factor) *: split into multiple circuits		Power supply
24W/m	16W/m	
~1.4m	~2.1m	50W power supply
~2.9m	~4.37m	100W power supply
~4.3m	~6.5m*	150W power supply

External dimensions


Both ends lead wire

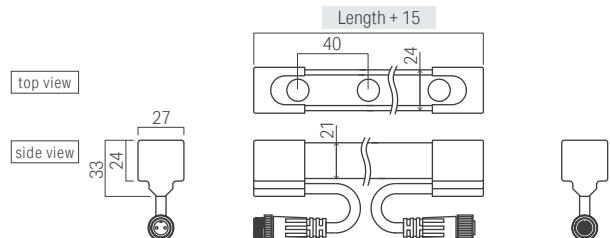








One end lead wire

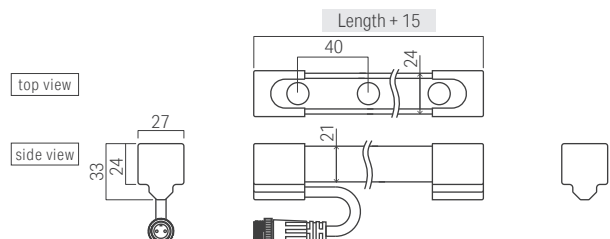

Cross sectional view when installing optional items

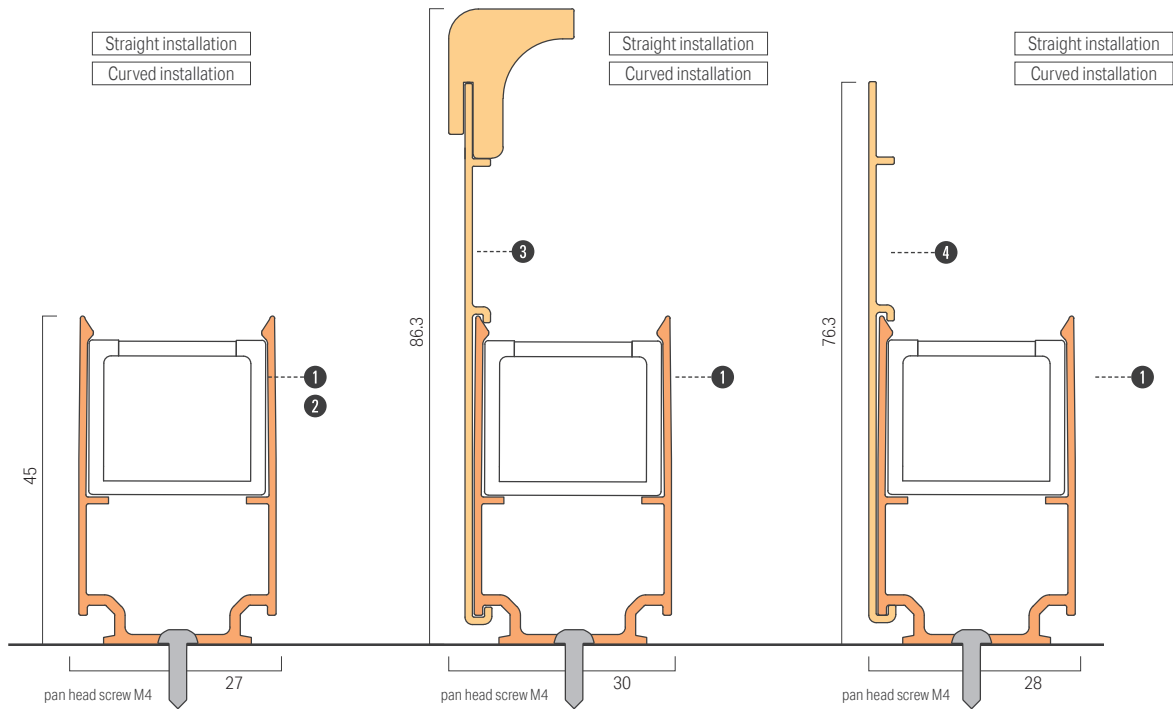

Option parts

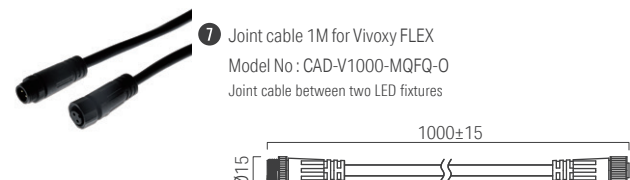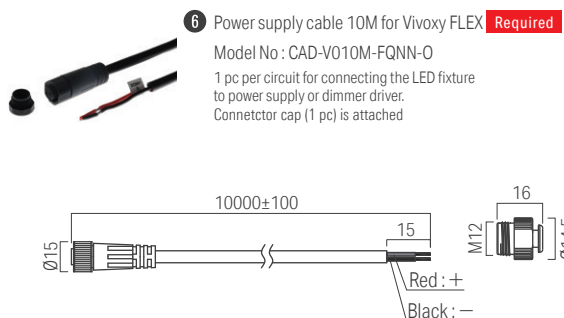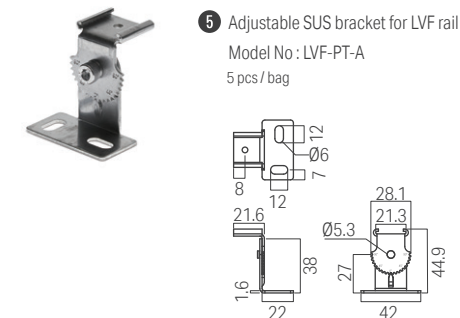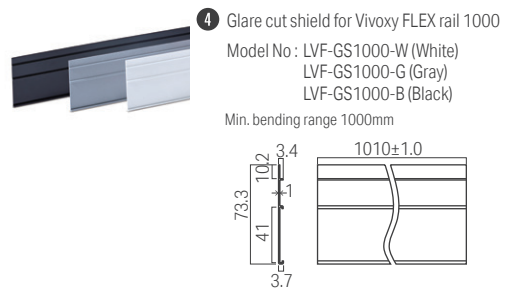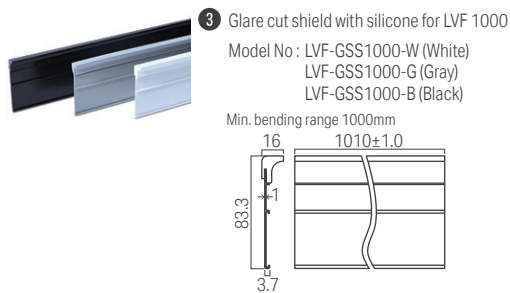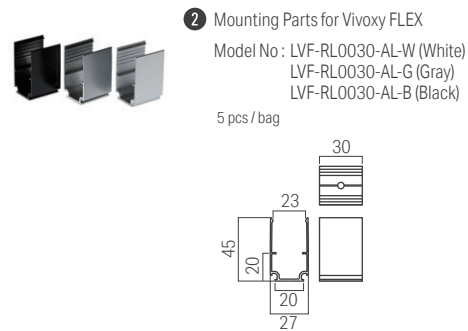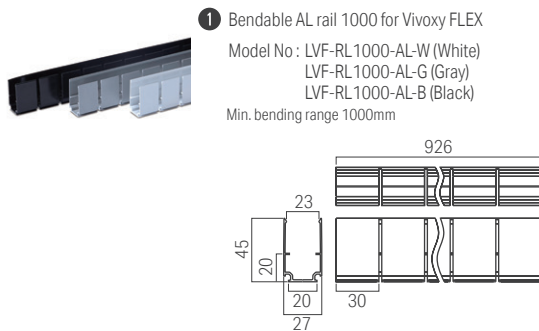

Luci Vivoxy FLEX IP67


Installing the product

Installation with bendable rail

Fix the bendable rail by screws supplied by installer.
Recommended screw : pan head screw M4

→ Hold the upper side of LED fixture and push it down to put it in the rail.

Rail length for each LED fixture length, number of screws, screw hole pitch, The recommended number of installations is as follows.

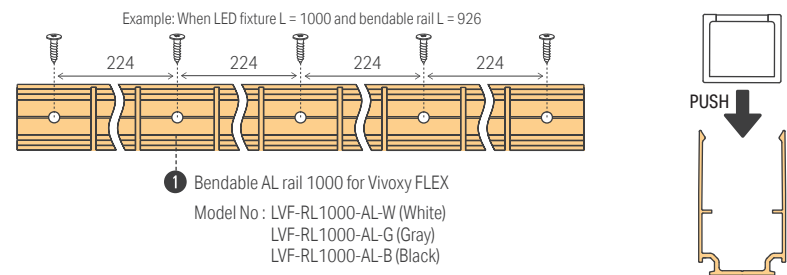

LED fixture length (mm)	Rail length (mm)	Number of screws	Screw hole pitch (mm)
125	30	1	A*
250	158	2	128
375	286	2	192
500	414	3	192
625	542	3	224
750	670	4	224
875	798	5	192
1000	926	5	224

Caution:

When inserting the LED fixture into the rail, do not press with force using fingers or a tool, it may cause damage to the LEDs, electric components, boards, and other parts.
There will be a high risk of unlighted LED, wire breakage and other failure occurring due to above improper mishandling.


A* Mounting Parts
For lengths longer than the above, combine each length.

Installation with mounting parts

Fix the mounting parts by screws supplied by installer.
Recommended screw : pan head screw M4

→ Hold the upper side of LED fixture and push it down to put it in the mounting parts.

Number of mounting parts for each LED fixture length, number of screws, screw hole pitch, The recommended number of installations is as follows.

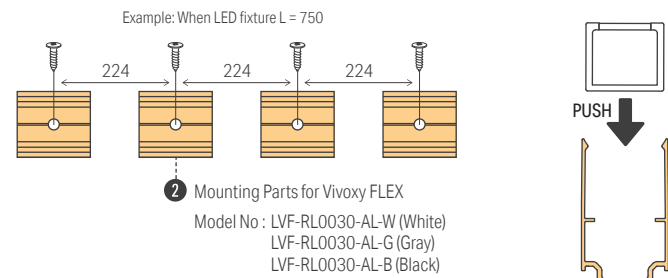

LED fixture length (mm)	Number of mounting parts	Number of screws	Screw hole pitch (mm)
125	1	1	A*
250	2	2	128
375	2	2	192
500	3	3	192
625	3	3	224
750	4	4	224
875	5	5	192
1000	5	5	224


Caution:

When inserting the LED fixture into the mounting parts, do not press with force using fingers or a tool, it may cause damages to the LEDs, electric components, boards, and other parts.
There will be a high risk of unlighted LED, wire breakage and other failures due to above improper mishandling.

A* Mounting Parts
For lengths longer than the above, combine each length.

Installation with bendable rail, mounting parts Common Items

Ensure the pin holes in the connectors are positioned correctly before joining them.
To fasten, rotate the metallic knobs until tightend.

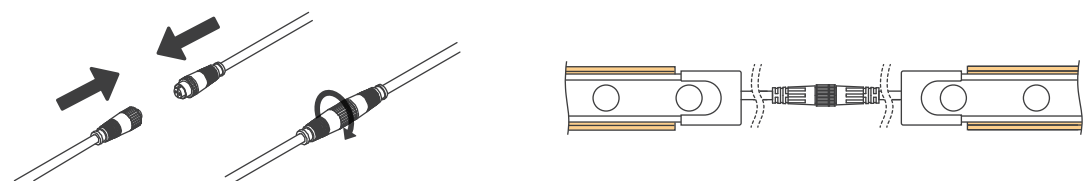

Caution:

The unenclosed connector at the terminal of Vivoxy FLEX IP67 must be sealed with connector cap which is enveloped in the power supply cable(CAAD-V010M-FQNN-O). To fasten, rotate the metallic knobs until tightend.



Aluminum rail cut

The Aluminium Bendable Rail for Vivoxy FLEX(LVF-RL1000-AL-W/B/G)can be cut according to the length of lighting fixture.
Aluminum rail mounting holes can also be made at the site by the installer. Please cut properly with a cutting tool for aluminum.

Installation of glare cut shield, glare cut shield & silicon on bendable rails

Attach the glare cut shield or glare cut shield & silicon to the bendable rail by sliding it as shown by the arrow.

To make rail and shield curve

Both rail and shield has to be straight when inserting shield into rail.



Bend rail and shield together to desired curve.


3 Glare cut shield for Vivox FLEX rail 1000

Model No : LVF-GS1000-W (White)
LVF-GS1000-G (Gray)
LVF-GS1000-B (Black)

4 Glare cut shield with silicone for LVF 1000

Model No : LVF-GSS1000-W (White)
LVF-GSS1000-G (Gray)
LVF-GSS1000-B (Black)

Example: For glare cut shield & silicon

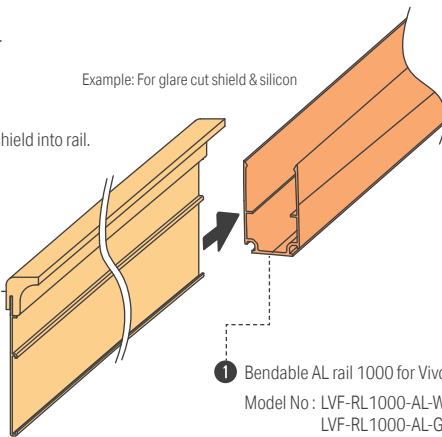

1 Bendable AL rail 1000 for Vivox FLEX

Model No : LVF-RL 1000-AL-W (White)
LVF-RL 1000-AL-G (Gray)
LVF-RL 1000-AL-B (Black)

Min. bending range R1000mm

Glare cut shield, Glare cut shield & silicon length for each LED fixture length, The recommended length of installations is as follows.

LED fixture length (mm)	Glare cut shield, Glare cut shield & silicon length (mm)
125	135
250	260
375	385
500	510
625	635
750	760
875	885
1000	1010

Caution:


Do not bend rail and shield separately as it make installation difficult and may cause shield to fall off rail.

Installation of adjustable brackets on bendable rail


Determine the angle of the adjustable bracket and tighten the screw at the arrow.



Slide the adjustable bracket on the bendable rail as shown by the arrow to attach it.



5 Adjustable SUS bracket for LVF rail
Model No : LVF-PT-A




Caution:

Do not bend bendable rail before inserting adjustable bracket.
Otherwise, it is difficult to insert and may cause adjustable bracket to fall off.
Make sure to firmly fasten screw for angle and joint screw to avoid falling off and misalignment.


Tighten the screw indicated by the arrow from the underside of adjustable bracket to fix adjustable bracket to bendable rail.

Adjustable bracket, bendable rail seen from below



Rail length for each LED fixture length, number of adjustable brackets, mounting pitch, The recommended number of installations is as follows.

LED fixture length (mm)	Rail length (mm)	Number of adjustable brackets	Mounting pitch (mm)
125	30	1	-
250	158	2	128
375	286	2	192
500	414	3	192
625	542	3	224
750	670	4	224
875	798	5	192
1000	926	5	224

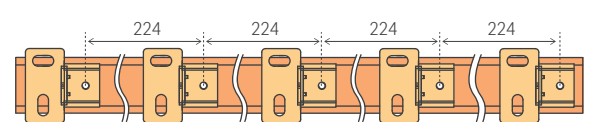

Example: When LED fixture L = 1000 and rail L = 926




Caution:

LED fixture and parts have bending tolerances.
Do not bend and install the LED fixture less than the following minimum bending radius as it will cause damage and malfunctions.


LED fixture

Top bend: min. R 500mm


Side bend: min. R 500mm




Bendable rail




Glare cut shield



Glare cut shield with silicone



System configuration diagram

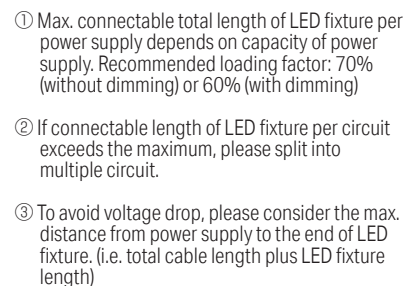

LVF40-1000W-L30-SP2-O-24-*



Note: The estimated value of 16 W/m is 67% of 24 W/m.

Illuminance data



LVF40 Luci Vivoxy FLEX

Color temperature

6500K 5000K 4200K 3500K 3000K 2700K 2200K


with rail





24W

LVF40-1000W-L30-SP2-O-24-W



Light source color 3000 K
Brightness 2278 cd
Luminous flux 1614 lm
Color rendering index Ra 92



with Glare cut shield with silicone






with Glare cut shield

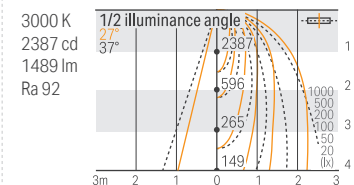




LVF40-1000W-L30-35-O-24-W

Light source color 3000 K
Brightness 2236 cd
Luminous flux 1678 lm
Color rendering index Ra 92

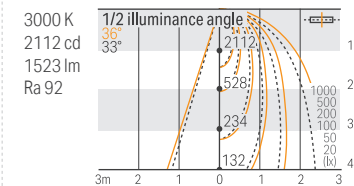

LVF40-1000W-L30-50-O-24-W




Light source color 3000 K
Brightness 1247 cd
Luminous flux 1653 lm
Color rendering index Ra 92

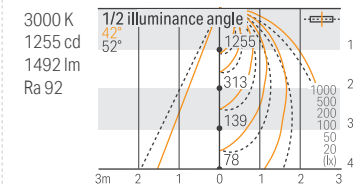

16W




LVF40-1000W-L30-SP2-O-16-W

Light source color 3000 K
Brightness 1518 cd
Luminous flux 1076 lm
Color rendering index Ra 92

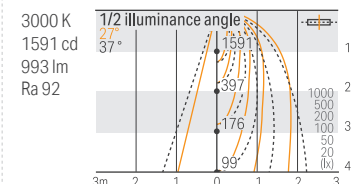




LVF40-1000W-L30-35-O-16-W

Light source color 3000 K
Brightness 1491 cd
Luminous flux 1119 lm
Color rendering index Ra 92

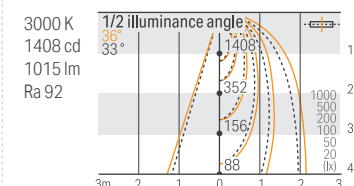

LVF40-1000W-L30-50-O-16-W


Light source color 3000 K
Brightness 831 cd
Luminous flux 1102 lm
Color rendering index Ra 92

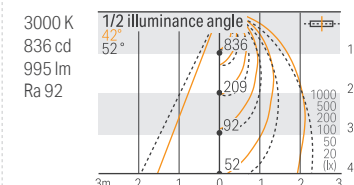

Outdoor
Strip light

LFUS

Luci UQ FLEX Sauna IP67 **NEW**

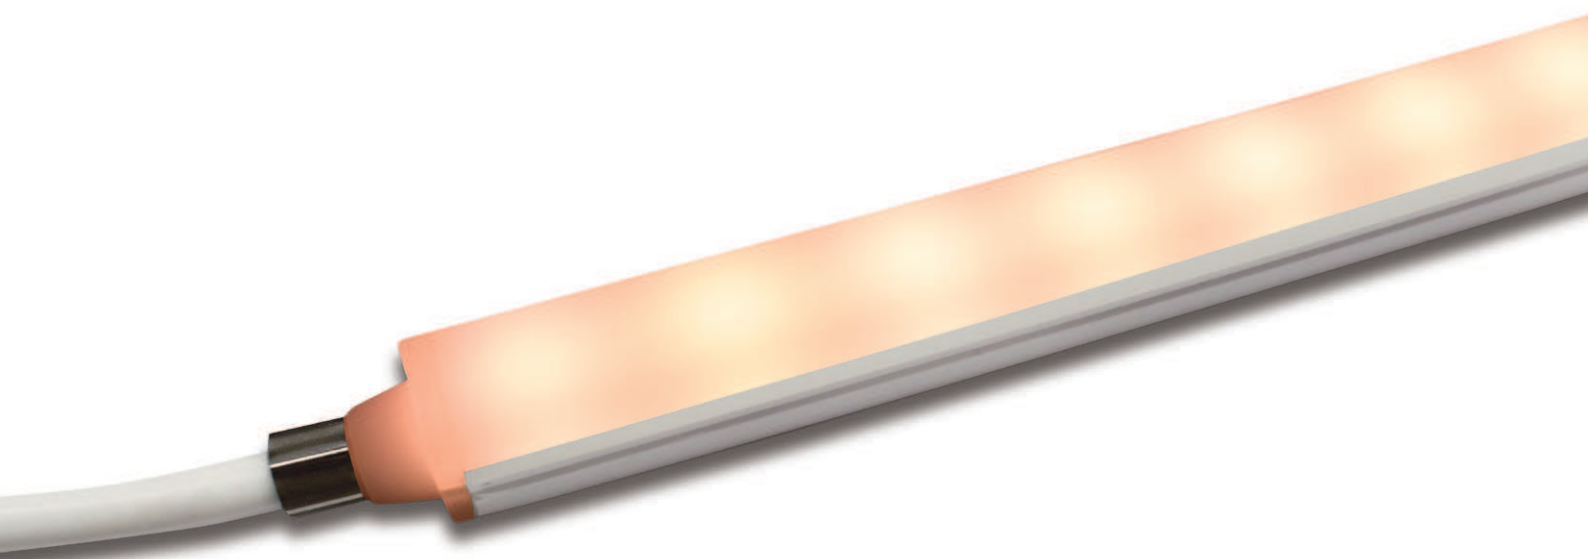


Luci UQ FLEX SAUNA

LFUS NEW



Karumaru Ikebukuro
Location: Japan
Architect office: Hashimoto Yukio Design Studio Inc.
Lighting design: Illumination of City Environment Ltd.
Photo: Nacasa & Partners Inc.

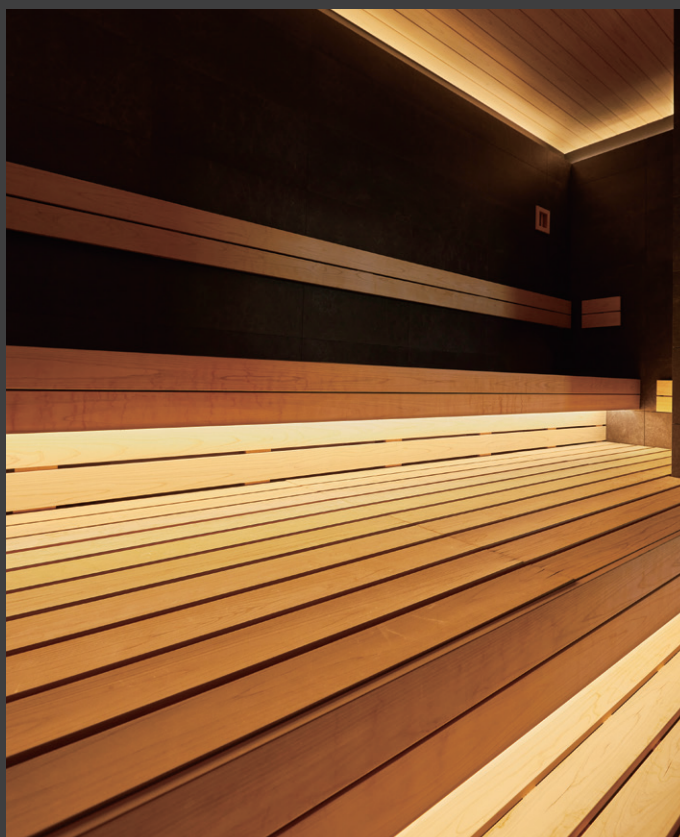


Tokyo Bay Shiomi Prince Hotel Sauna
Location: Japan
Architect office: Kume Sekkei Co., Ltd.
Lighting design: Noosa Design Co. Ltd



TRUSCO Resort Spa Karuizawa
Location: Japan
Architect office: NIKKEN SEKKEI LTD

Construction: KAJIMA CORPORATION
Sauna Construction: AQUA ENTERPRISE
Photo : Masao Suzuki, Studio Riki

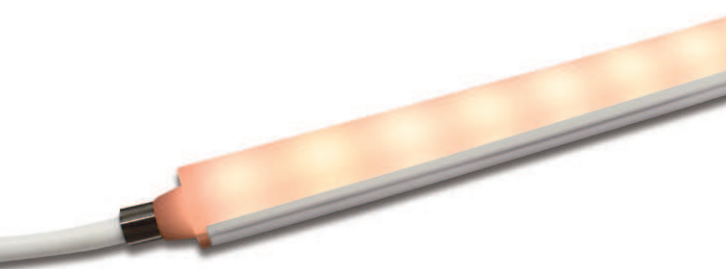

Luci UQ FLEX SAUNA

Pioneer of SAUNA linear LED lighting
Designed to withstand high temperatures and high humidity environments
Creates a unique and cosy lighting design in sauna
keeping privacy with indirect lighting at foot area

Specifications

Dimensions


Cross section	W 16 x H 15 mm
Standard length	On stock Both sides feed cable with IP67 connector
	1000 500 250
Custom length	MOQ 10m Both sides feed or one side feed with IP67 connector
	Up to 5 m in 250 mm increment

Color temperature

2700K

Min Bending radius


R 150mm in top bend (vertical direction)




Electrical & Output

Power Consumption (W/m)	4.6
Luminous flux @ 2700K (lm/m)	215


Features

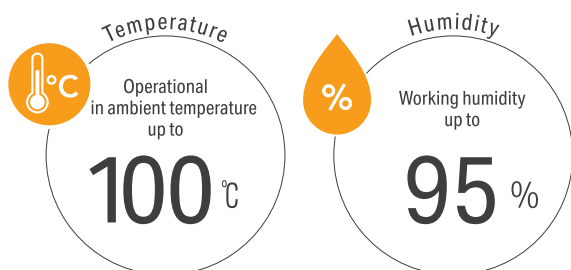

Special material for high temperature and humidity

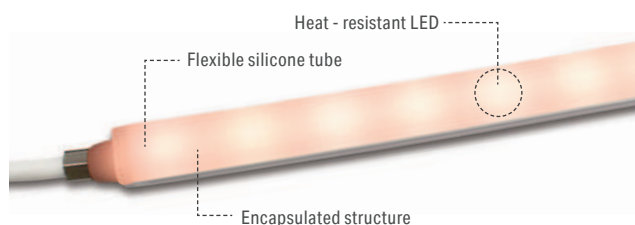

Simple connection with screw clamp



Lower frequency of maintenance!

The lifetime of LED is longer than the krypton lamp, therefore the manpower and cost of maintenance can be decreased.

Comparison of replacement frequency

Krypton lamp	once per 2-3 months
UQ FLEX SAUNA	once per 1-5 years

with one year warranty

Increased Safety!

The glass cover of krypton lamp might cause injury when broken but silicon-made UQ FLEX SAUNA never hurt you.




about Krypton

*Krypton light is a glass light bulb filled with krypton gas.



The benefits of using indirect lighting in sauna room

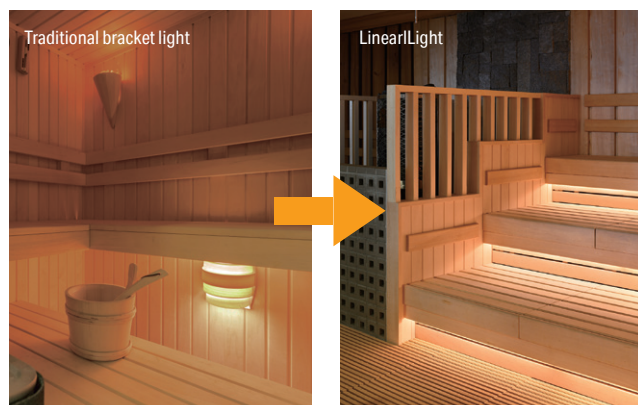

Sauna&Capsale AMZA / Location: Japan / Photo: Yasutake Kondo

Available type of Sauna

- Traditional sauna Finnish sauna
- Steam sauna
- Dry sauna
- Steam bath or Turkish bath
- Infrared therapy sauna
- Hot Yoga studio

*When installing the LED fixture in an extremely high-temperature areas such as a near hot-air outlet or the ceiling, please make sure that the environment temperature does not exceed the fixture specification in advance.



MEGALOS Koiwa / Location: Japan / Lighting design: DAIKO ELECTRIC CO., LTD. / Photo: Nomura Real Estate Life & Sports Co., Ltd.




Tokyo Bay Shiomi Prince Hotel Sauna aria

LFUS NEW

Color management
ANSI BIN



- High-temperature & humidity resistance, IP67
- Covered with silicone, top-bend semi-diffused lighting

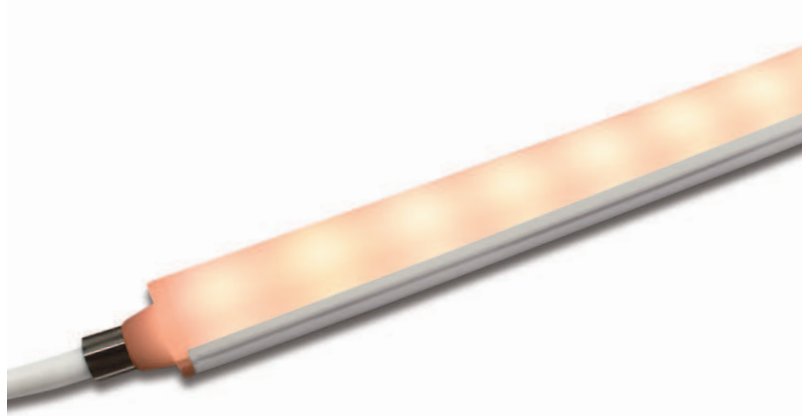


Model No. / Standard item

LFUS - T		S	- L27		- DF	- O	
Product Name	Length	Lead wire	Feed direction	Light source color	Tube type	Environment	
LFUS	Custom order length P.175	W: Both ends S: One end	S: Straight	L27: Warm white 2700K	DF: Diffuser	O: Outdoor	

Light Intensity

Refer to P.175



Specification / Standard length

Size		0250	0500	1000
Model No.		LFUS-T0250WS-L27-DF-O	LFUS-T0500WS-L27-DF-O	LFUS-T1000WS-L27-DF-O
Wattage		1.2 W	2.3 W	4.6 W
Fitting length		290 mm	540 mm	1040 mm
Weight		120g	200g	380g
Luminaire efficacy(2700K)		46.8 lm/W	46.8 lm/W	46.8 lm/W
Light source color - = N/A, *=Calculated value				
D	7100K	—	—	—
N	5000K	—	—	—
W	4000K	—	—	—
WW	3500K	—	—	—
L30	3000K	—	—	—
L27	2700K Ra 83	○ 54 lm*	○ 108 lm	○ 215 lm*
L24	2400K	—	—	—
L21	2100K	—	—	—
L19	1900K	—	—	—

*Specification may be subject to change without announcement.

The optical data provided on each product pages are for reference only;
the data values are not guaranteed. Please use as reference material for your planning.

General Specification

Input voltage	DC24V
Environment	Indoor, Outdoor
Max. length per circuit	5 m
Min. bending range	R 150 mm
Material (body)	Silicone
Material (clip)	SUS
Material (rail)	Aluminium
Accessories	① Mounting clip ② Mounting rail ③ Hold Clip ④ Joint plate ⑤ Power supply cable ⑥ Joint cable
Certification	JISC0920, IP67
Ambient temperature	0°C ~ +100°C (Working humidity up to 95%)
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

Warranty period: One year*

*If the usage time per day exceeds for more than 20 hours, the warranty period is half of the period mentioned above. For further detail of warranty, please contact Luci sales.


Max. connectable length per power supply

Length of LED fixture (60% loading factor) *: split into multiple circuits	Power supply
~ 6.5 m*	50W power supply
~ 13.0 m*	100W power supply
~ 19.6 m*	150W power supply

External dimensions

Both ends lead wire

top view

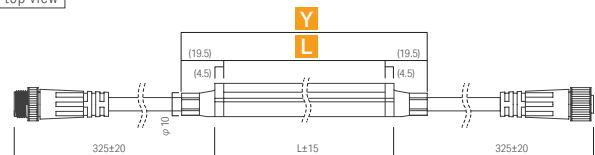


side view




side view




Cross sectional view when installing optional items

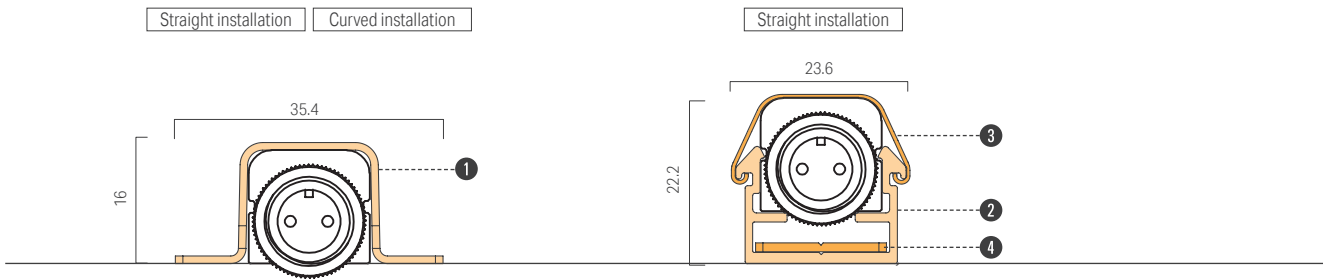

Option parts

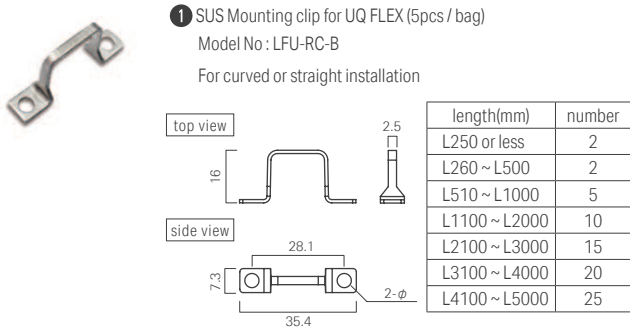

Any dark spot doesn't appear in indirect light as the light is diffused by tube even when using SUS clip or SUS rail clip.

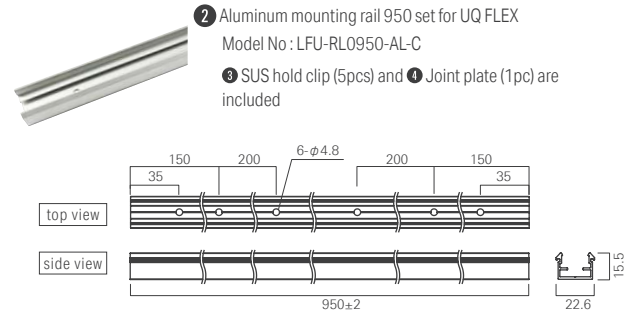

3 SUS hold Clip for UQ FLEX aluminum rail (5pcs / bag)

Model No : LFU-PT-C






For holding LED fixture in the mounting rail
For extra order, 5pcs / bag



4 Joint Plate for UQ FLEX aluminum rail (1pc / bag)

Renewal Attachments for 2
Model No : LFU-PT-E

To joint two 2 Aluminum mounting rail in straight
For extra order, 1 pc

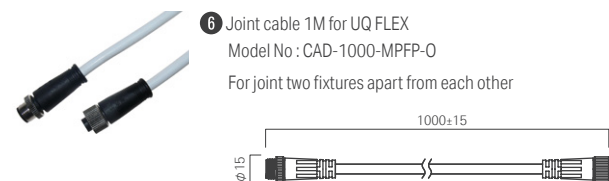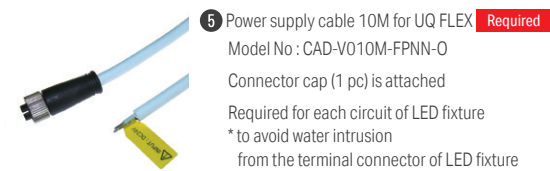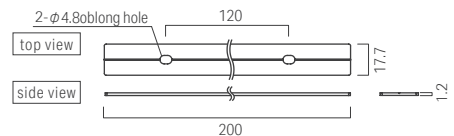


Prohibited installation places

- pooling water
- liquids including chlorine or chemicals
- coastal areas which are affected by sea spray
- where sulfide gas is contained in the air such as hot spring

Caution

Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.



Pay attention when use in high temperature environment

Since the parts are made of metal, there is a risk of burning injury by touching directly in a high-temperature environment. Please install the parts in a place where not being touched directly. In case of maintenance or replacement of the LED fixtures, make sure that the surrounding temperature and parts are not hot, and then perform the work.


Please make sure to install the power supply in an appropriate environment according to the instruction manual of the power supply.

When installing the LED fixture in a high-temperature spot such as a near hot-air outlet or ceiling, please make sure that the environment temperature does not exceed the fixture specification in advance.

Luci UQ FLEX SAUNA


Installing the product

Installation with Mounting clip

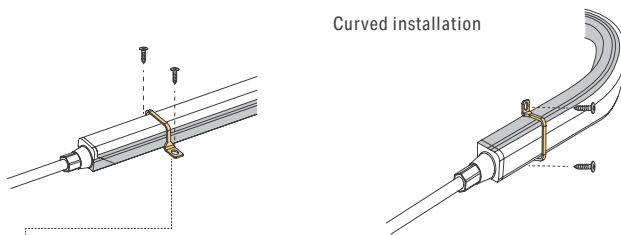

- ① SUS Mounting clip for UQ FLEX (5pcs / bag)
Model No : LFU-RC-B

Fix the mounting clip by 2 pcs of screws supplied by installer
(Pan head screw M4 recommended).



Recommended number of mounting clip as below.


length(mm)	number
L250 or less	2
L260 ~ L500	2
L510 ~ L1000	5
L1100 ~ L2000	10
L2100 ~ L3000	15
L3100 ~ L4000	20
L4100 ~ L5000	25

Installation with Mounting rail




- ② Aluminum mounting rail 950 for UQ FLEX
Model No : LFU-RL0950-AL-C

- ① Fix the aluminum rail by screws supplied by installer
(Pan head screw M4 recommended).



- ② Hold one side of the LED fixture and push on the other side, the LED fixture will gradually enter the aluminum rail.

- ③ SUS hold Clip for UQ FLEX aluminum rail (5pcs / bag)
Attachment for ②
Model No : LFU-PT-C




- ③ Push the SUS hold clip (LFU-PT-C) until click sound and make sure it is securely locked. SUS hold clip is recommended in the environment where requires durability.

- ④ Ensure the pinholes in the connectors are positioned correctly before joining them.
To fasten, rotate the metallic knobs until tightened.


Caution

Caution: Do not bend the LED fixture to side direction against light-emitting surface and twist. If it is bent wrongly, FPC will be damaged and the LED fixture will not turn on.

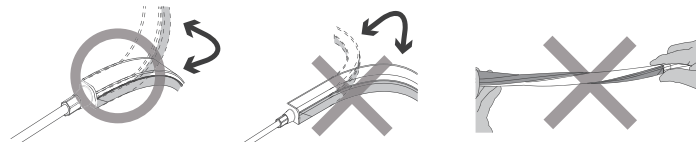


Installation with mounting rail (When the length of the LED fixture is longer than 1m)


- ① When two or more rails are installed in a straight line, insert the Joint plate into bottom of the rail.

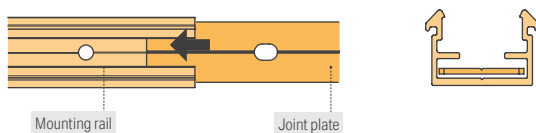


- ③ Fix the holes of rails and plate altogether by screws.

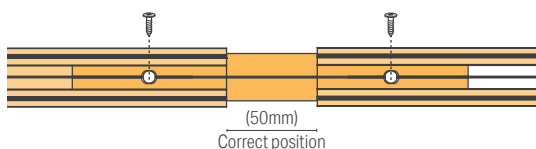

- ② Put the second rail and slide the Joint plate as below.

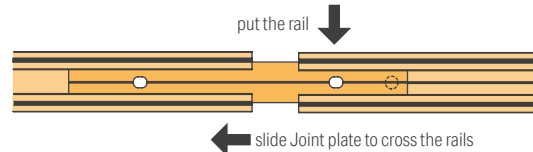

- ④ Fix the holes of second rail for installation like ①...




- ④ Joint plate for UQ FLEX AL rail C
Attachment for ②
Model No : LFU-PT-E

Caution

When inserting the LED fixture into the rail, do not press with excessive force, and exercise caution not to damage the LEDs, electronic components, board, and other parts with your fingers or a tool. There are high risk of LED unlighted, wire breakage and other failure occurring due to above improper handling.


Caution

The unenclosed connector at the terminal of UQ FLEX must be sealed with connector cap which is enveloped in the power supply cable(CAD-V010M-FPNN-O). To fasten, rotate the metallic knobs until tightend.




Luci UQ FLEX SAUNA

System configuration diagram

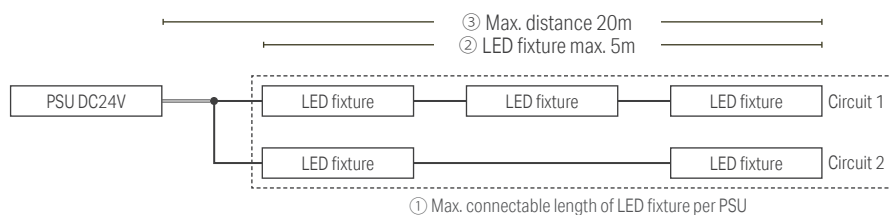

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

External dimensions / Custom order **MOQ: 10 m**

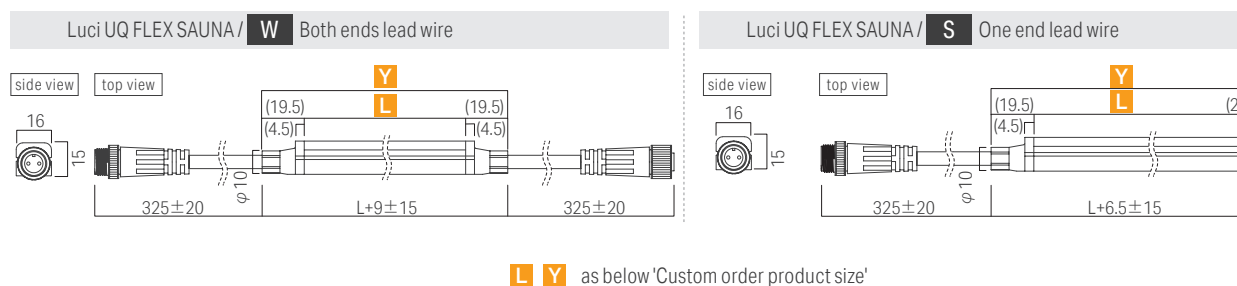


Custom order products size

L Length	Y External size		Power consumption
	(mm)		(w)
	Both ends lead wire (WS)	One end lead wire (SS)	
0250	290	272	1.2
0500	540	522	2.3
0750	790	772	3.5
1000	1040	1022	4.6
1250	1290	1272	5.8
1500	1540	1522	6.9
1750	1790	1772	8.1
2000	2040	2022	9.2
2250	2290	2272	10.4
2500	2540	2522	11.5



L Length	Y External size		Power consumption
	(mm)		(W)
	Both ends lead wire (WS)	One end lead wire (SS)	
2750	2790	2772	12.7
3000	3040	3022	13.8
3250	3290	3272	15.0
3500	3540	3522	16.1
3750	3790	3772	17.3
4000	4040	4022	18.4
4250	4290	4272	19.6
4500	4540	4522	20.7
4750	4790	4772	21.9
5000	5040	5022	23.0

Direct horizontal surface light intensity distribution chart

LFUS-T1000 □ S-L27-DF-O
Light source color 2700K
Brightness 64 cd
Luminous flux 215 lm
Color rendering index Ra 83



Recommended dimensions and illumination distribution

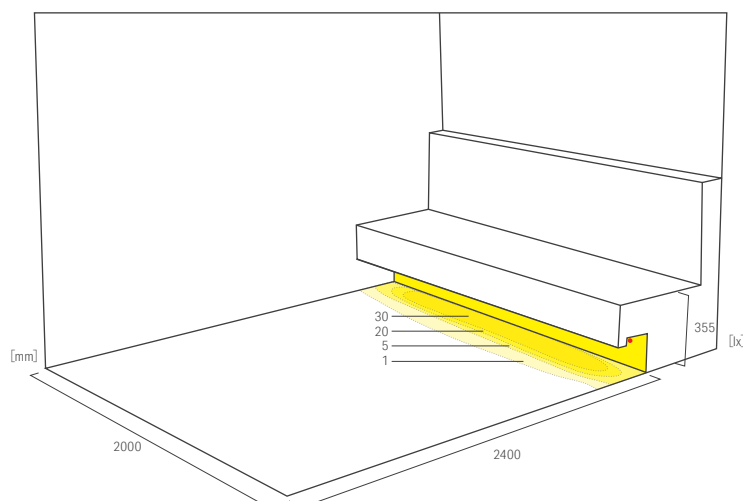

Luci UQ FLEX IP67 / Luci UQ FLEX α IP67

LFU-0 RENEWAL / LFUA-0 NEW



Brewerkz Orchard Rendezvous Hotel



The Prince Gallery Tokyo Kioicho
Location: Japan
Architect Office: Nikken Sekkei Ltd
Interior Design: Rockwell Group, Europe

Lighting Design: Lighting Planners Associates
Construction: KAJIMA CORPORATION / TEKKEN CORPORATION / Kumagai Gumi Co., Ltd. Consortium
Photo: TOSHIO KANEKO

Luci UQ FLEX IP67 / Luci UQ FLEX α IP67

Homogenous flexible light in top bend or side bend.
Ideal for facade, landscape lighting with connectable 10m length per run.

Specifications

Dimensions

Cross section W 16 x H 15 mm
Custom order up to 2m at every 100 mm length with both ends or one end feed cable
Up to 2 m in 100 mm increment

Feed cables are available in three directions: straight, side or back.
Do not allow to cut the LED fixture and cable at site.

Electrical & Output

Model	15	12	8
Power Consumption (W/m)	15.8	12.6	8.4
Luminous flux @ 3000K (lm/m)			
UQ FLEX IP67(LFU-O) Top bend	803	640	427
UQ FLEX α IP67(LFUA-O) Side bend	592	472	315

Color temperature



Ra 90

Please refer to the product specification page for the delivered CCT.

Optics



- Unique rounded corner light emitting surface for wide light distribution for less unpleasant peaks on the illuminated surface
- Cross-sectional size common to LFU-I and LFUA-I

Min Bending radius



Features

Cable feed directions

Back feed

For direct view
Required a hole/depth for cable on installation surface.



Side(Right) feed


For indirect cove



Straight feed



Connectable up to 10m of luminaire per run thanks to the IC driver in each unit.
Less concern of PSU location!

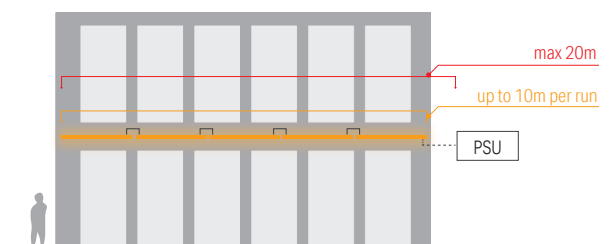


LFU-O

RENEWAL

Color management
MacAdam 3 step



- Top bend dot-free flexible strip
- IP67, max custom length 2m for outdoor usage, up to 10m per run
- 15.8W/m, 12W/m, 8W/m type
- Newly available back feed

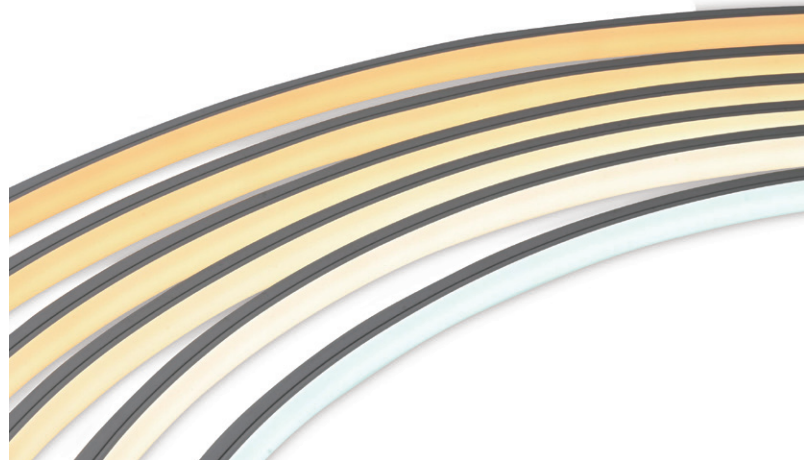


Model No.

LFU - **T** ☐ ☐ ☐ ☐ ☐ - ☐ - **DF** - **O** - ☐

Product Name	Length	Lead wire	Light source color	Tube type	Wattage
LFU	Refer to Custom order length	W: Bothends S: Oneend Lead wire B: Back feed R: Side(Right) feed S: Straight feed	D : Daylight white N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L21 : Warm white 2100K L19 : Warm white 1900K	DF: Diffuser Environment O: Outdoor	15: 15.8 W/m 12: 12.6 W/m 8: 8.4 W/m

Light Intensity Refer to P.186



Specification


Model No.	LFU-T1000S/W B/R/S-□-DF-O-15				LFU-T1000S/W B/R/S-□-DF-O-12				LFU-T1000S/W B/R/S-□-DF-O-8				
Power consumption	15.8 W/m				12.6 W/m				8.4 W/m				
Fitting length(L)	1000mm (Refer to Custom order length)				1000mm (Refer to Custom order length)				1000mm (Refer to Custom order length)				
Weight	-				-				-				
Luminaire efficacy(2700K)	50.8 lm/W				50.8 lm/W				50.8 lm/W				
Light source color	Delivered CCT	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.											
D 6500K Ra92	6000K	937lm	*	747lm	*	498lm	*						
N 5300K -	-	-	*	-	*	-	*						
W 4200K Ra93	4000K	966lm	○	770lm	○	513lm	○						
WW 3500K Ra93	3200K	865lm	○	689lm	○	460lm	○						
L30 3000K Ra94	2700K	803lm	○	640lm	○	427lm	○						
L27 2700K Ra93	2500K	781lm	○	623lm	○	415lm	○						
L24 2400K Ra93	2300K	730lm	○	582lm	○	388lm	○						
L21 2100K -		-	*	-	*	-	*						
L19 1900K -		-	*	-	*	-	*						

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification


Input voltage	DC24V
Environment	Outdoor IP67, Indoor
Max. length	2m
Max. length Per circuit	10m
Min. bending range	R150mm
Material (body)	Silicone
Attachments	-
Option parts	① Mounting rail set ② Mounting parts set ③ Mounting Clip ④ Power supply cable ⑤ Joint cable
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

W: Both ends lead, S: Straight feed

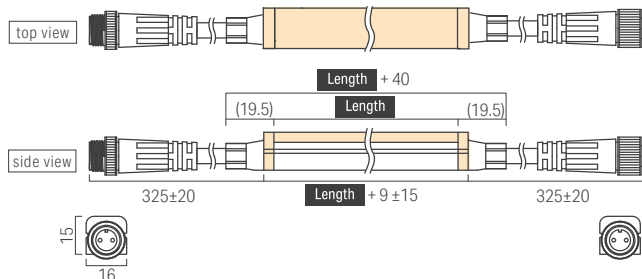


External dimensions


W: Both ends lead, B: Back feed

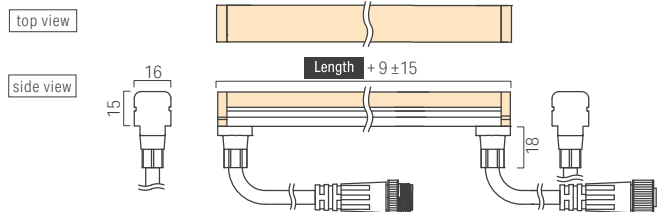

W: Both ends lead, R: Side(Right) feed



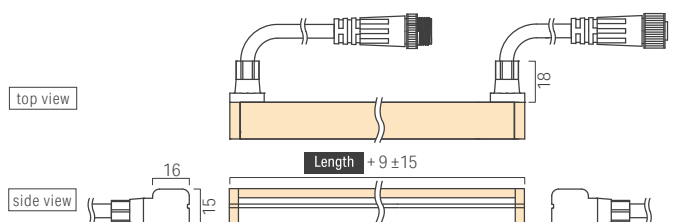


Cross sectional view when installing optional items

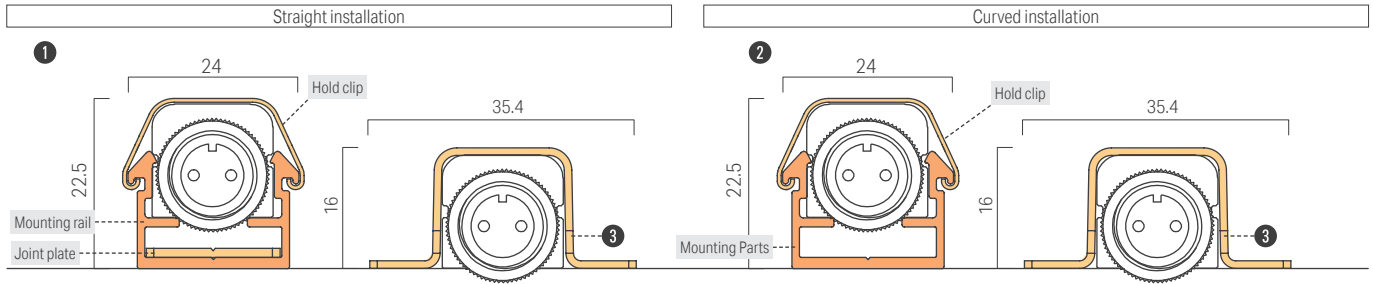


Option parts


- 1** Aluminium mounting rail 950 set for UQ FLEX
Model No : LFU-RL0950-AL-C
The set includes Mounting rail (1pc) and SUS hold clip (5 pcs/bag) and Joint plate (1pc)
For straight installation
*When back feed, need a hole for endcap on installation surface.

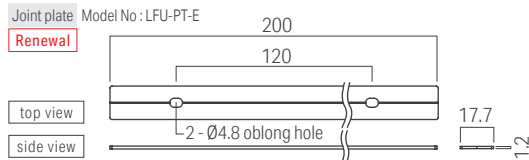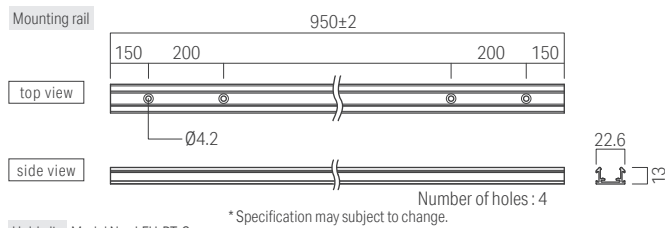

- 3** SUS Mounting clip for UQ FLEX
Model No : LFU-RC-B
5 pcs/bag
Recommended 5 pcs/m
For curved installation
*When back feed, need a hole for endcap on installation surface.



- 2** Aluminium mounting parts set for UQ FLEX **New**
Model No : LFU-RL0018-AL-C
The set include Mounting parts (5 pcs/bag) and SUS hold clip (5 pcs/bag)
Recommended each 5 pcs/m
For curved installation
*When back feed, need a hole for endcap on installation surface.

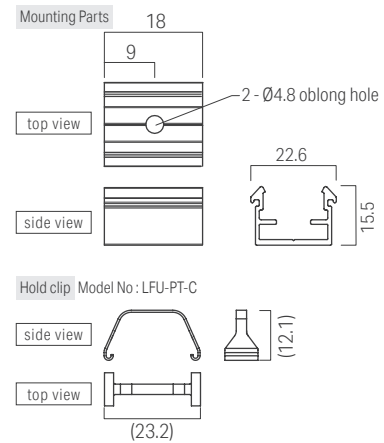


- 4** Power supply cable 10M for UQ FLEX **Required**
Model No : CAD-V010M-FPNN-O
10000±100
Ø15, 15, Red: +, Black: -
M12, 16, Ø14.5, 12.8

- 5** Joint cable 1M for UQ FLEX
Model No : CAD-1000-MPFP-O
1000±15
Ø15, 15

Prohibited installation places

Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

- pooling water
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Luci UQ FLEX IP67 (15.8 W/m, 12.6 W/m, 8.4 W/m)									
Corresponds to Length of Model No. and External dimensions									
0100	0300	0500	0700	0900	1100	1300	1500	1700	1900
0200	0400	0600	0800	1000	1200	1400	1600	1800	2000

Max. connectable length per power supply


Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
15.8W/m	12.6W/m	8.4W/m	
~2.2m	~2.9m	~4.3m	50W power supply
~4.4m	~5.8m	~8.7m	100W power supply
~6.6m	~8.7m	~13.1m*	150W power supply

LFUA-O NEW

Color management
MacAdam 3 step



- Side bend dot-free flexible strip
- IP67, max custom length 2m for outdoor usage, up to 10m per run
- 15.8W/m, 12W/m, 8W/m type

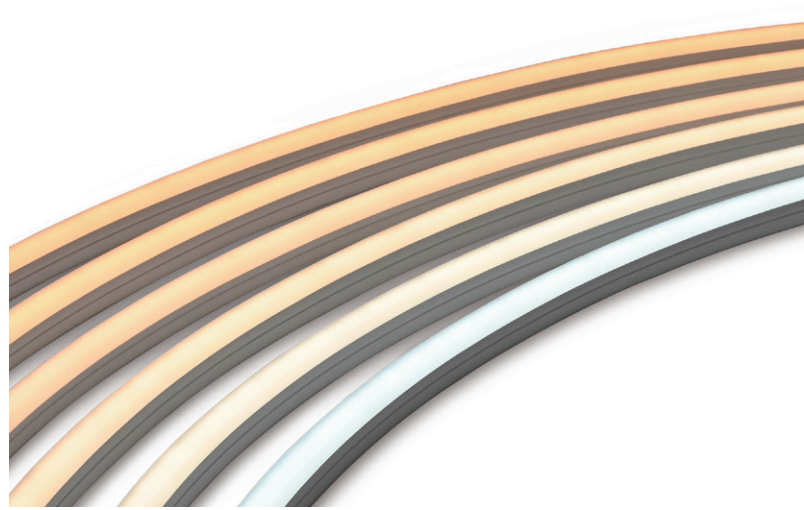


Model No.

LFUA - **T** ☐ ☐ ☐ ☐ ☐ - ☐ - **DF** - **O** - ☐

Product Name	Length	Lead wire	Light source color	Tube type	Wattage
LFUA	Refer to Custom order length	W: Bothends S: Oneend Lead wire B: Back feed R: Side(Right) feed S: Straight feed	D : Daylight white N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L21 : Warm white 2100K L19 : Warm white 1900K	DF: Diffuser Environment O: Outdoor	15: 15.8 W/m 12: 12.6 W/m 8: 8.4 W/m

Light Intensity Refer to P.187



Specification


Model No.				LFUA-T1000S/W B/R/S-□-DF-O-15		LFUA-T1000S/W B/R/S-□-DF-O-12		LFUA-T1000S/W B/R/S-□-DF-O-8	
Power consumption				15.8 W/m		12.6 W/m		8.4 W/m	
Fitting length(L)				1000mm (Refer to Custom order length)		1000mm (Refer to Custom order length)		1000mm (Refer to Custom order length)	
Weight				-		-		-	
Luminaire efficacy(2700K)				37.5 lm/W		37.5 lm/W		37.5 lm/W	
Light source color		Delivered CCT		○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.					
D	6500K	Ra92	6000K	656lm	*	523lm	*	349lm	*
N	5300K	-	-	-	*	-	*	-	*
W	4200K	Ra93	4000K	656lm	○	531lm	○	354lm	○
WW	3500K	Ra93	3200K	603lm	○	481lm	○	320lm	○
L30	3000K	Ra94	2700K	592lm	○	472lm	○	315lm	○
L27	2700K	Ra93	2500K	547lm	○	436lm	○	291lm	○
L24	2400K	Ra93	2300K	514lm	○	410lm	○	273lm	○
L21	2100K	-		-	*	-	*	-	*
L19	1900K	-		-	*	-	*	-	*

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification


Input voltage	DC24V
Environment	Outdoor IP67, Indoor
Max. length	2m
Max. length Per circuit	10m
Min. bending range	R150mm
Material (body)	Silicone
Attachments	-
Option parts	① Mounting rail set ② Mounting parts set ③ Mounting Clip ④ Power supply cable ⑤ Joint cable
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

W: Both ends lead, S: Straight feed

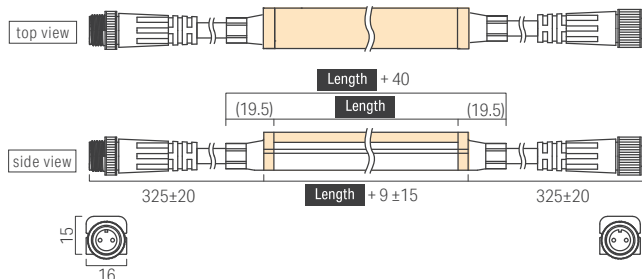


External dimensions


W: Both ends lead, B: Back feed

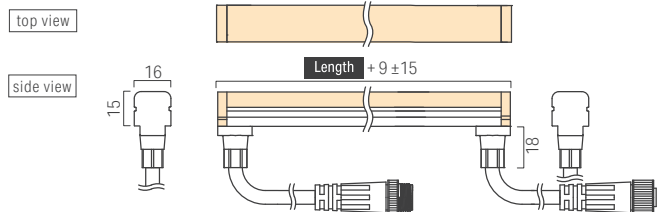



W: Both ends lead, R: Side(Right) feed

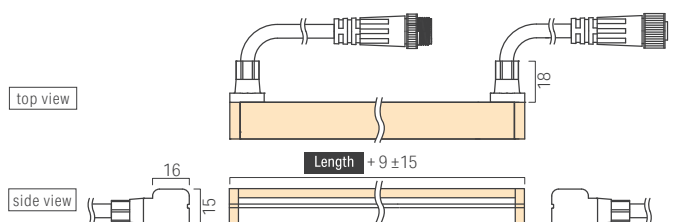

Cross sectional view when installing optional items

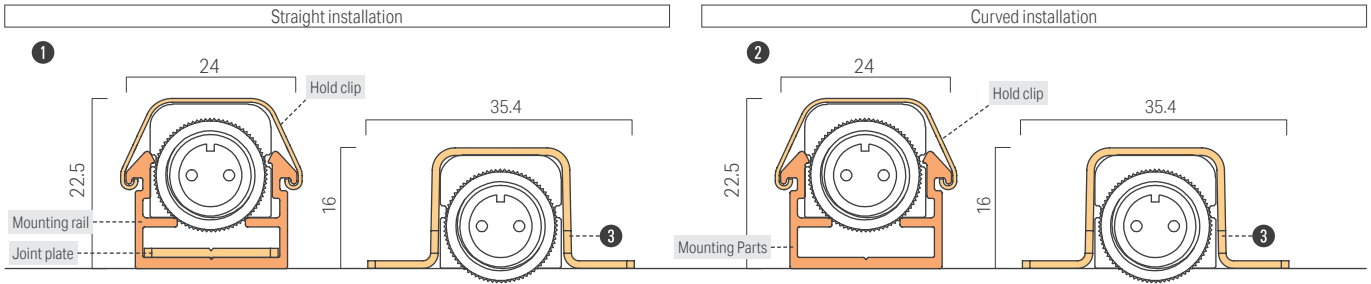


Option parts

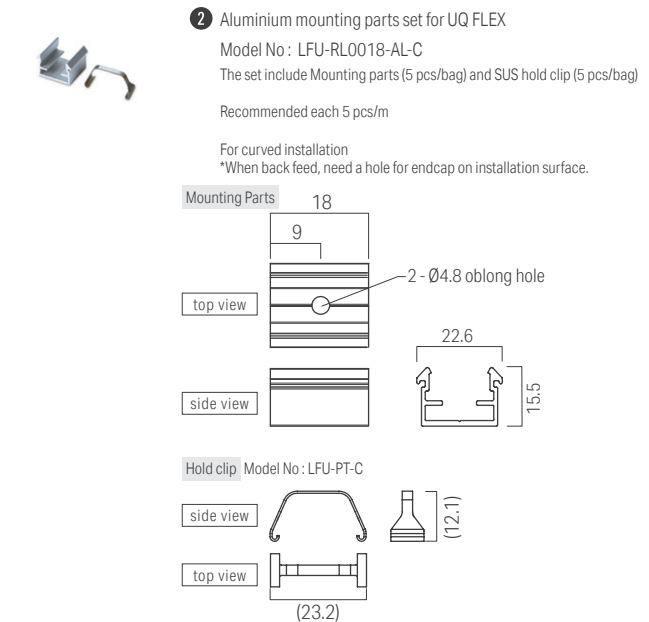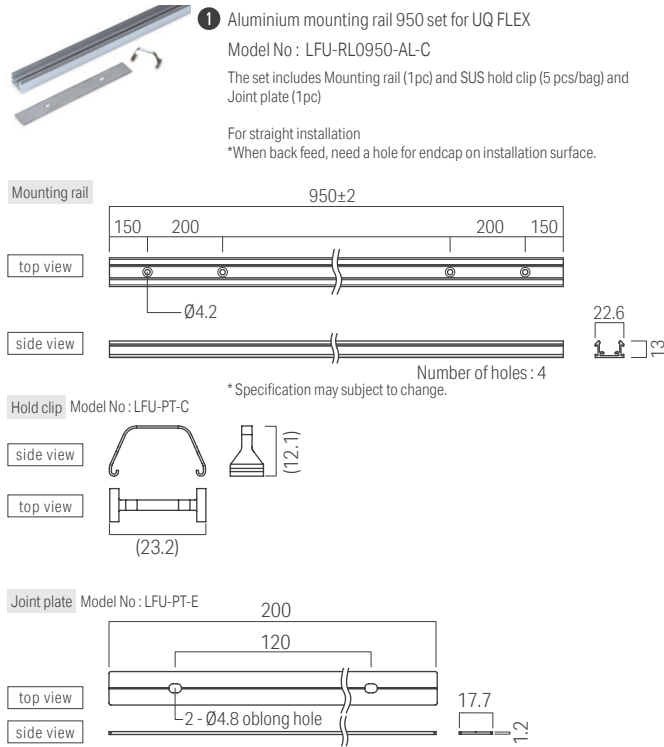

Prohibited installation places

Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

- pooling water
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Luci UQ FLEX α IP67 (15.8 W/m, 12.6 W/m, 8.4 W/m)									
Corresponds to Length of Model No. and External dimensions									
0100	0300	0500	0700	0900	1100	1300	1500	1700	1900
0200	0400	0600	0800	1000	1200	1400	1600	1800	2000

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
15.8W/m	12.6W/m	8.4W/m	50W power supply
~2.2m	~2.9m	~4.3m	
~4.4m	~5.8m	~8.7m	100W power supply
~6.6m	~8.7m	~13.1m*	150W power supply


Luci UQ FLEX IP67/ Luci UQ FLEX α IP67

Installing the product


Installation with Mounting rail

① Aluminium mounting rail 950 set for UQ FLEX (LFU-RL0950-AL-C)


- ① Fix the aluminium rail by screws (pan head screw M4 recommended) supplied by installer. The screw holes at both ends should be left unused for installing with the Joint plate.

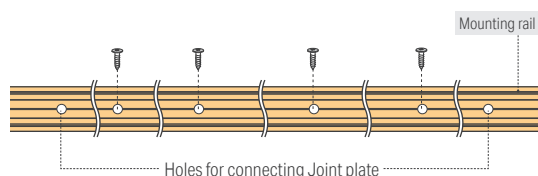


- ② When two or more rails are installed in a straight line, insert the Joint plate into bottom of the rail.

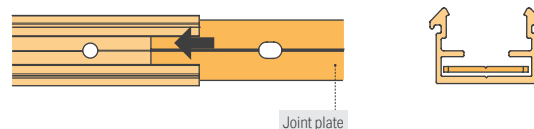


- ③ Put the second rail and slide the Joint plate as below.

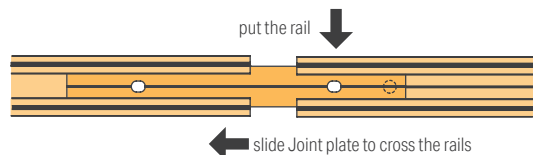

- ④ Fix the holes of rails and plate altogether by screws.

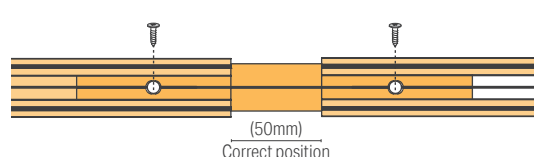


- ⑤ Fix the holes of second rail for installation like ①...




LFU-O Top / Vertical bend only

- ⑥ Hold one side of the LED fixture and gradually push on the other side into the aluminum rail.

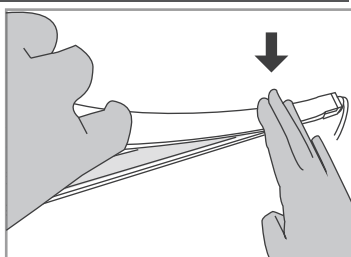


LFUA-O Side / Horizontal bend only


- ⑥ When installing LFUA (side bend) on the mounting rail, the LED fixture shall first be placed horizontally on the rail and the entire LED fixture shall be pushed gradually horizontally into the rail so that the LED fixture does not bend vertically.

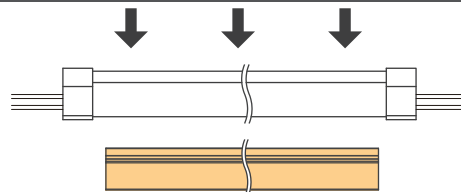

- ⑦ Push the PC hold clip for UQ FLEX rail (LFU-PT-B) until click sound and make sure it is securely locked. SUS hold clip is recommended in the environment where requires durability or downwards installation. Recommended number of LFU-PT-B is minimum 3 pcs/m.




- ⑧ Please have 10mm gaps between 2 fittings to absorb the expansion and the contraction of lighting fixture.

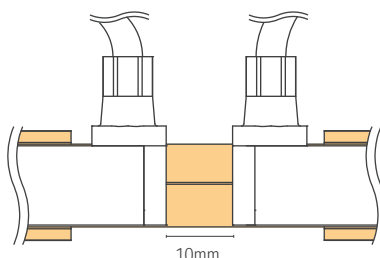

Installation with Mounting clip

③ PC Mounting clip for UQ FLEX (LFU-RC-B)


- ① Place the LED fixture on the surface to be installed.
Do not twist and bend the LED fixture in the wrong direction.
- ② Fix the mounting clip by 2pcs of screws supplied by installer.(pan head screw M4 recommended) The recommended distance between clips is 200 mm or less. The clips at both ends should be 50 mm away from the ends of the LED luminaire to prevent it from lifting.

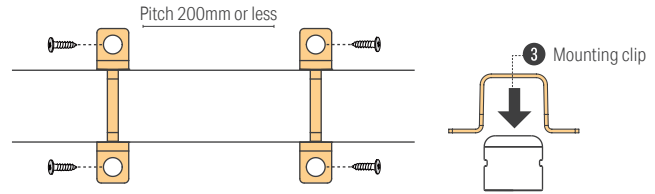


Installation with Mounting parts

② AL mounting parts set for UQ FLEX (LFU-RL0018-AL-C)

- ① Fix the aluminum mounting parts by 1 pc of screw to the points where the LED fixture is to be installed. (pan head screw M4 recommended) The recommended distance between clips is 200 mm or less. The mounting parts at both ends should be 50 mm away from the ends of the LED fixture to prevent it from lifting.
- ② Push the LED fixture into the clip while keeping the correct bending direction.
Caution: Do not bend the LED fixture in the wrong direction.
- ③ Put the PC hold clip (LFU-PT-B) until click sound and make sure it is securely locked. The hold clips should be used if the LED fixture is easily dislodged or installed downward.

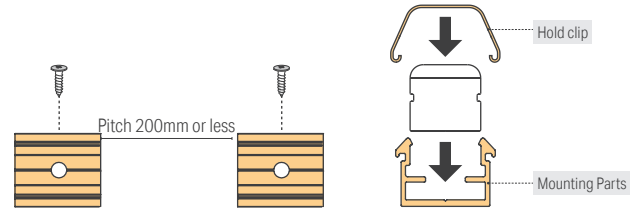

System configuration diagram

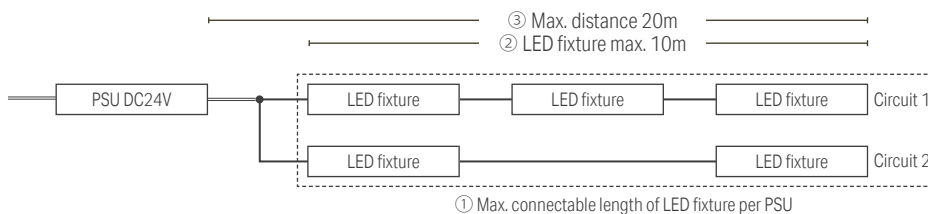

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits			Power supply
15.8W/m	12W/m	8W/m	50W power supply
~2.2m	~2.9m	~4.3m	
~4.4m	~5.8m	~8.7m	100W power supply
~6.6m	~8.7m	~13.1m*	150W power supply

Luci UQ FLEX IP67/ Luci UQ FLEX α IP67

Luci UQ FLEX IP67 -Custom order-


Model No.

Product name	Length	Lead Wire	Light source color	Tube type	Environment	Wattage
LFU - T <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> - DF - O - <input type="text"/> <input type="text"/>	Refer to "Custom order products size"	W Both ends lead wire S One end lead wire B Back feed R Side(Right) feed S Straight feed	D Daylight white 6500K N Natural white 5300K W White 4200K WW Warm white 3500K 3500K L30 Warm white 3000K 3000K L27 Warm white 2700K 2700K L24 Warm white 2400K 2400K L21 Warm white 2100K 2100K L19 Warm white 1900K 1900K	DF Diffuser	O Outdoor	15 15.8W 12 12.6W 8 8.4W

External dimension


Luci UQ FLEX IP67 / **W** Both ends lead wire, **B** Back feed

LFU - T **WB -** **- DF - O -**

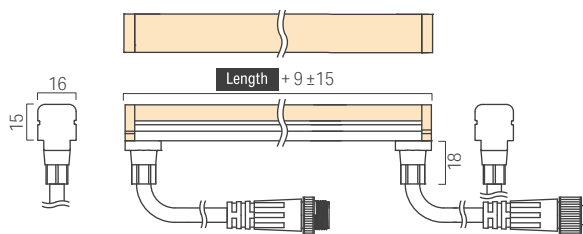


Luci UQ FLEX IP67 / **S** One end lead wire, **B** Back feed

LFU - T **SB -** **- DF - O -**

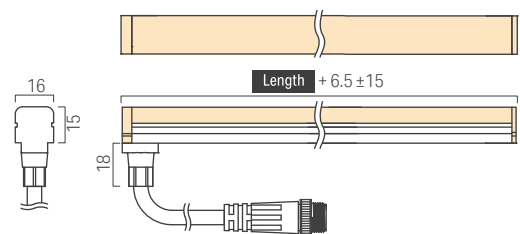


Luci UQ FLEX IP67 / **W** Both ends lead wire, **R** Side(Right) feed

LFU - T **WR -** **- DF - O -**

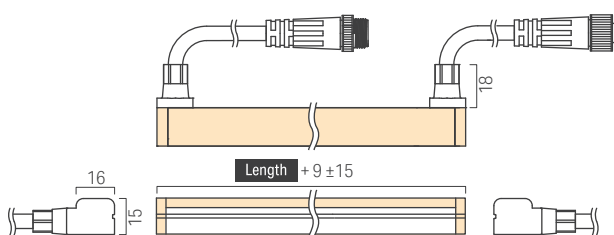


Luci UQ FLEX IP67 / **S** One end lead wire, **R** Side(Right) feed

LFU - T **SR -** **- DF - O -**

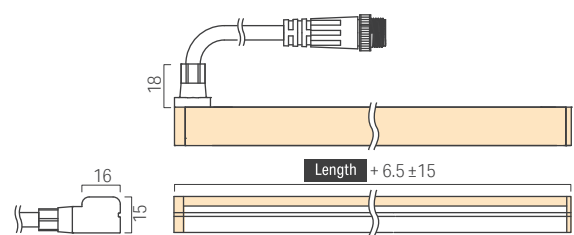


Luci UQ FLEX IP67 / **W** Both ends lead wire, **S** Straight feed

LFU - T **WS -** **- DF - O -**

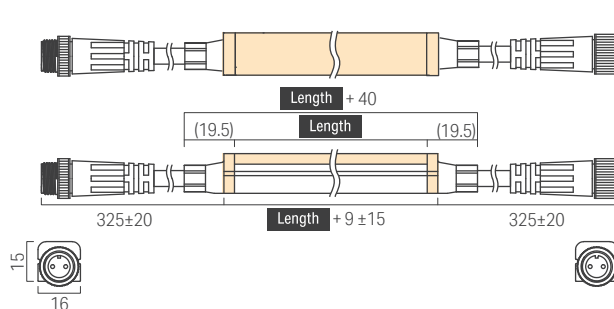

Luci UQ FLEX IP67 / **S** One end lead wire, **S** Straight feed

LFU - T **SS -** **- DF - O -**

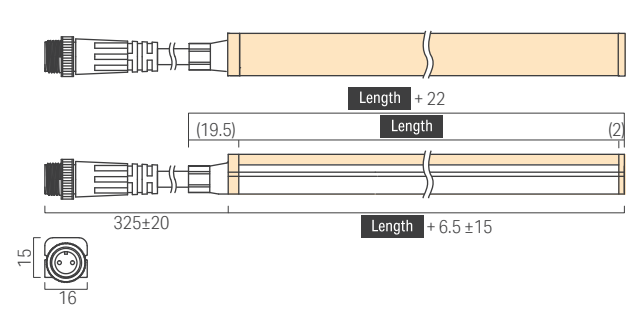

Custom order products size

Luci UQ FLEX IP67 (15.8 W/m, 12.6 W/m, 8.4 W/m)									
Corresponds to Length of Model No. and External dimensions									
0100	0300	0500	0700	0900	1100	1300	1500	1700	1900
0200	0400	0600	0800	1000	1200	1400	1600	1800	2000

Model No.

LFUA - T□□□□ □□ - □ - DF - O - □

Product name

Length

Lead Wire

Light source color

Tube type

Environment

Wattage

Refer to
"Custom order
products size"

W Both ends lead wire
S One end lead wire

Lead Wire

B Back feed
R Side(Right) feed
S Straight feed

D	Daylight white	6500K
N	Natural white	5300K
W	White	4200K
WW	Warm white 3500K	3500K
L30	Warm white 3000K	3000K
L27	Warm white 2700K	2700K
L24	Warm white 2400K	2400K
L21	Warm white 2100K	2100K
L19	Warm white 1900K	1900K

DF Diffuser


O Outdoor

15 15.8W
12 12.6W
8 8.4W

External dimension


Luci UQ FLEX α IP67 / **W** Both ends lead wire, **B** Back feed

LFUA - T□□□□ **WB** - □ - DF - O - □

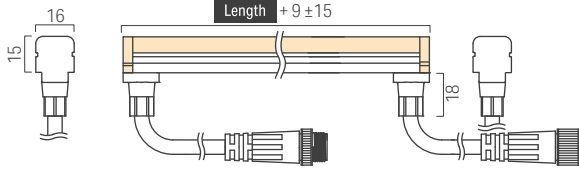


Luci UQ FLEX α IP67 / **S** One end lead wire, **B** Back feed

LFUA - T□□□□ **SB** - □ - DF - O - □

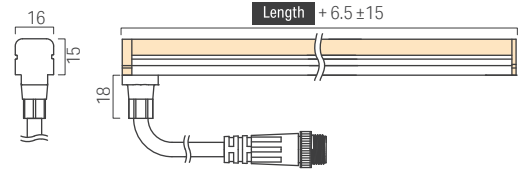


Luci UQ FLEX α IP67 / **W** Both ends lead wire, **R** Side(Right) feed

LFUA - T□□□□ **WR** - □ - DF - O - □

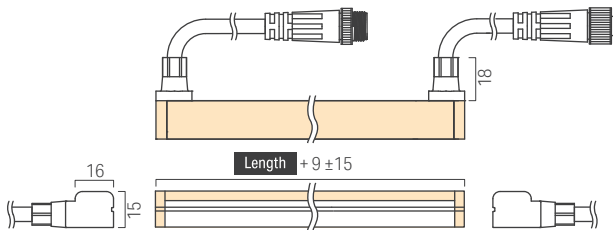


Luci UQ FLEX α IP67 / **S** One end lead wire, **R** Side(Right) feed

LFUA - T□□□□ **SR** - □ - DF - O - □

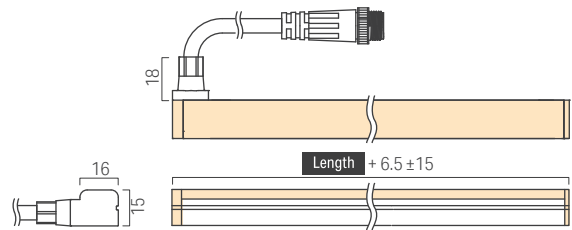


Luci UQ FLEX α IP67 / **W** Both ends lead wire, **S** Straight feed

LFUA - T□□□□ **WS** - □ - DF - O - □

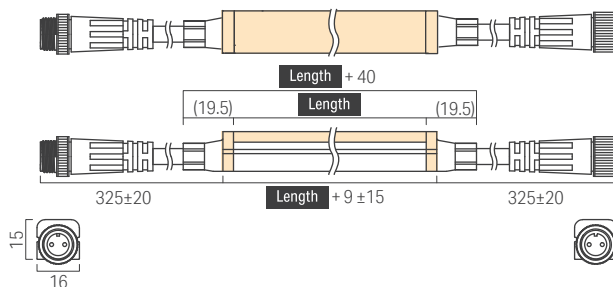

Luci UQ FLEX α IP67 / **S** One end lead wire, **S** Straight feed

LFUA - T□□□□ **SS** - □ - DF - O - □

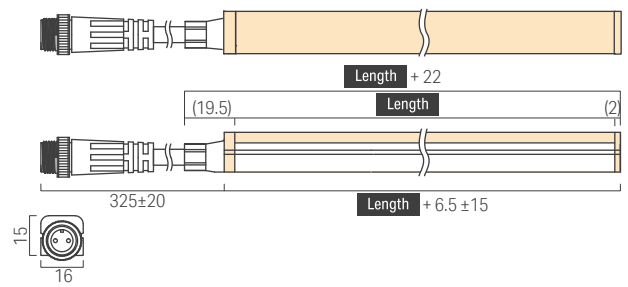

Custom order products size

Luci UQ FLEX α IP67 (15.8 W/m, 12.6 W/m, 8.4 W/m)

Corresponds to **Length** of Model No. and External dimensions

0100	0300	0500	0700	0900	1100	1300	1500	1700	1900
0200	0400	0600	0800	1000	1200	1400	1600	1800	2000

Luci UQ FLEX IP67/ Luci UQ FLEX α IP67

Illuminance data



LFU-O Luci UQ FLEX IP67


Color temperature

6500K 5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

Direct horizontal surface light intensity distribution chart


LFU-T1000**-D-DF-O-15

Light source color 6500K
Brightness 234 cd
Luminous flux 937 lm
Color rendering index Ra 93




LFU-T1000**-W-DF-O-15

Light source color 4200K
Brightness 241 cd
Luminous flux 966 lm
Color rendering index Ra 92




LFU-T1000**-WW-DF-O-15

Light source color 3500K
Brightness 216 cd
Luminous flux 865 lm
Color rendering index Ra 95




LFU-T1000**-L30-DF-O-15

Light source color 3000K
Brightness 200 cd
Luminous flux 803 lm
Color rendering index Ra 97




LFU-T1000**-L27-DF-O-15

Light source color 2700K
Brightness 195 cd
Luminous flux 782 lm
Color rendering index Ra 96



LFU-T1000**-L24-DF-O-15

Light source color 2400K
Brightness 180 cd
Luminous flux 731 lm
Color rendering index Ra 97



Illuminance data



LFUA-O Luci UQ FLEX α IP67


Color temperature

6500K 5300K 4200K 3500K 3000K 2700K 2400K 2100K 1900K

Direct horizontal surface light intensity distribution chart


LFUA-T1000**-D-DF-O-15

Light source color 6500K
Brightness 193 cd
Luminous flux 657 lm
Color rendering index Ra 94




LFUA-T1000**-W-DF-O-15

Light source color 4200K
Brightness 196 cd
Luminous flux 666 lm
Color rendering index Ra 93




LFUA-T1000**-WW-DF-O-15

Light source color 3500K
Brightness 178 cd
Luminous flux 603 lm
Color rendering index Ra 96




LFUA-T1000**-L30-DF-O-15

Light source color 3000K
Brightness 164 cd
Luminous flux 593 lm
Color rendering index Ra 97




LFUA-T1000**-L27-DF-O-15

Light source color 2700K
Brightness 160 cd
Luminous flux 548 lm
Color rendering index Ra 97



LFUA-T1000**-L24-DF-O-15

Light source color 2400K
Brightness 151 cd
Luminous flux 514 lm
Color rendering index Ra 98




Luci FLEX IP65 series

3 years warranty



Soft acrylic tube

Good heat dissipation comes the non-fully encapsulated structure.



Special sealing material and treatment with primer strongly fix the tube and cable with high airtightness to prevent water intrusion.

IP65 connector




Top bend



Luci Power FLEX EX IP65


Our next FLEX standard with preferable price

- Renewed to High CRI LED package, >Ra90
- High-energy efficacy achieving up to 92.4lm/W
- 3 steps MacAdam ellipse LED package
- 5 types of wattage and lumen output (18.2W, 12.1W, 9.5W, 6.5W, 4.5W per meter)
- 3 types of LED pitch (15mm, 20mm, 30mm)
- No need to attach aluminum profile for heat sink
- Customized length available up to 3.5m(LFPEX15), 5m(LFPEX20,30) per roll




Luci Power FLEX IP65

- Customized length available (LFP15: up to 4.5m, 30mm increment, LFP20: up to 5m 20mm increment)
- 2 types of wattage (15.4W, 10.5W per meter)
- Ideal for projects that have various length requirement



Luci Flat FLEX F IP65

- Narrow LED pitch suitable for limited space installation (10mm pitch, 16mm pitch)
- Small section W10mm * H4mm
- 2 types of wattage (3.9W, 2.5W per meter)
- Customized length available up to 5m per roll




Application

Top bend

Facade indirect light



Mirror light for powder room




Side bend

Handrail



Under bench / steps




Side bend



Luci FLEX α F IP65

- Low-powered LED strip with bending sideways
- Side view LED package
- Small bending radius (Min. R 50mm)
- Narrow LED pitch suitable for limited space installation (10mm pitch)
- Small section W4mm * H10mm
- Customized length available up to 5m per roll



	Product Series	Series code	Wattage/m	Lumen/m	CRI	Custom order	
						Max. length	Diffser Tube
Top bend	Luci Power FLEX EX IP65 LFPEX P.190	LFPEX15	18.2 W/m	1496 lm/m	Ra 93	3.5m	
		LFPEX20	12.1 W/m	1016 lm/m	Ra 92		
		LFPEX30(9.5W)	9.5 W/m	695 lm/m	Ra 92	5m	N/A
		LFPEX30(6.5W)	6.5 W/m	516 lm/m	Ra 92		
		LFPEX30(4.5W)	4.5 W/m	371 lm/m	Ra 92		
	Luci Power FLEX IP65 LFP P.196	LFP15	15.4 W/m	790 lm/m	Ra 90	4.5m	
		LFP20	10.5 W/m	563 lm/m		5m	
	Luci Flat FLEX IP65 LFTF P.202	LFTF10	3.9 W/m	282 lm/m	Ra 87	5m	
		LFTF16	2.5 W/m	176 lm/m			
Side bend	Luci FLEX α IP65 LFXF P.208	LFXF10	3.9 W/m	252 lm/m	Ra 71	5m	

Luci Power FLEX IP65

LFPEX-0



9 Penang Road
Location: Singapore
Lighting Design: Arup Singapore



Kanazawa Tokyu Hotel
Location: Japan
Owner: TOKYU HOTELS CO., LTD.
Architect office: ILVA Corporation

Lighting Design: sola associates
Construction: Tokyu Construction Co., Ltd.
Photo: Nacasa & Partners Inc.




Luci Power FLEX EX IP65

Best - selling strip light with superb price-performance
ideal for large scale projects.
Application is ideal for concealed lighting
with sufficient depth, backlit for light box

Specifications

Dimensions

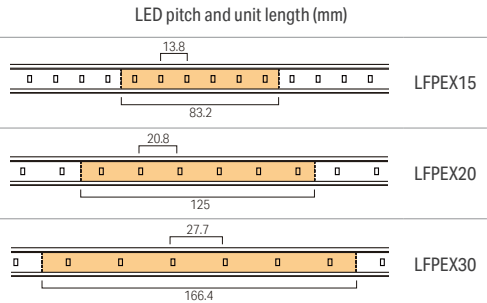

Cross section W 15 x H 4.5 mm
Standard length 1m with both ends IP67 connector
Custom order up to 5m (LFPEX20/30) or 3.5m (LFPEX15) length at every unit length
with both ends or one end feed cable with IP67 connector
Do not allow to cut the LED fixture and cable at site.

Electrical & Output


Model	LFPEX15	LFPEX20	LFPEX30	LFPEX30	LFPEX30
Power Consumption (W/m)	18.2	12.1	9.5	6.5	4.5
Luminous flux @ 3000K (lm/m)	1493	1008	644	408	308

Color temperature




Min Bending radius

R 50mm in top (vertical) bend direction




Accessories

Mounting rail 1000 for Power FLEX



45°Mounting rail 1000 for Power FLEX



Easy to cut these rails at site as it's made by AES material



Soft acrylic tube

- Higher protection performance than bare LED strip against unexpected static electricity, external force and environmental factors which may cause damage to the circuit board and components.
- Long-lasting characteristics are maintained against deformation, discolouration, and deterioration certify by sunshine weather-resistant tests applied in the automotive industry.

Project reference



Tanah Merah Country Club / Location : Singapore / Photo : Robert Such

Discontinued

Luci Power FLEX EX IP65

LFPEX-O

Color management
MacAdam 3 step

CE



3 years warranty


- Flexible strip covered with soft acrylic tube
- Customized length available up to 3.5m(LFPEX15), 5m(LFPEX20/30)
- 5 types of wattage and lumen output in 3 kinds of LED pitch



Model No.

LFPEX -T - -CL-O

Product Name / LED pitch	Length / Lead wire	Light source color	Tube type	Environment	Wattage
LFPEX15 : 15mm pitch	Custom order length P.195	N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K L21 : Warm white 2100K L19 : Warm white 1900K	CL : Clear	O : Outdoor	only for LFPEX30 9 : 9.5W 6 : 6.5W 4 : 4.5W
LFPEX20 : 20mm pitch					
LFPEX30 : 30mm pitch					
W : Both ends S : One ends					




Specification @ Clear cover

LED pitch	15mm pitch	20mm pitch	30mm pitch		
Model No.	LFPEX15-T1000W- -CL-O	LFPEX20-T1000W- -CL-O	LFPEX30-T1000W- -CL-O-9	LFPEX30-T1000W- -CL-O-6	LFPEX30-1000- -CL-O-4
Power consumption	18.2W/m	12.1W/m	9.5W/m	6.5W/m	4.5W/m
Fitting length	1011mm	1011mm	1011mm		
Weight	60g	60g	60g		
Unit length	83.2mm (6 LED)	125mm (6 LED)	166.2mm (6 LED)		
Luminaire efficacy (2700K)	86.6 lm/W	88.2 lm/W	85.2 lm/W	89.6 lm/W	92 lm/W

Light source color		○ = Device inventory * = Please contact us since it is made-to-order products and has MOQ. * = Equivalent														
D	6500K	-			-			-			-			-		
N	5300K	Ra 92	*	1692 lm	Ra 92	*	1150 lm	Ra 92	*	847 lm	Ra 92	*	536 lm	Ra 92	*	405 lm
W	4200K	Ra 93	○	1680 lm	Ra 93	○	1125 lm	Ra 93	○	812 lm*	Ra 93	○	514 lm*	Ra 93	○	388 lm*
WW	3500K	Ra 93	○	1620 lm	Ra 93	○	1101 lm	Ra 93	○	704 lm*	Ra 93	○	446 lm*	Ra 93	○	337 lm*
L30	3000K	Ra 94	○	1493 lm	Ra 94	○	1008 lm	Ra 94	○	644 lm	Ra 94	○	408 lm	Ra 94	○	308 lm
L27	2700K	Ra 93	○	1496 lm	Ra 92	○	1016 lm	Ra 92	○	643 lm	Ra 92	○	407 lm	Ra 92	○	307 lm
L24	2400K	Ra 93	○	1260 lm	Ra 93	○	856 lm	Ra 93	○	592 lm	Ra 93	○	375 lm	Ra 93	○	283 lm
L21	2100K	Ra 93	*	1100 lm	Ra 96	*	748 lm	Ra 96	*	550 lm	Ra 96	*	348 lm	Ra 96	*	263 lm
L19	1900K	Ra 63	*	1405 lm	Ra 63	*	955 lm	Ra 63	*	703 lm	Ra 63	*	445 lm	Ra 63	*	336 lm

General Specification	
Input voltage	DC24V
LED beam angle	120°
Environment	In/Outdoor (no condensation) IP65
Max. length per circuit	LFPEX15: 3.5m, LFPEX20/30: 5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachments	-
Option parts	① ② ③ Mounting rail ④ ⑤ Mounting clip ⑥ Power supply cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

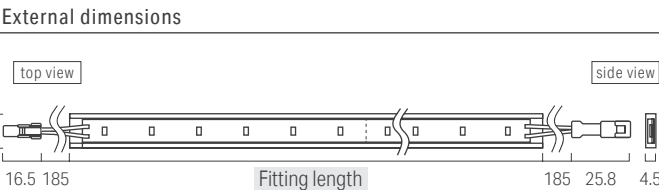

Prohibited installation places:

- direct expose to water / pooling of water

- direct sunlight

- liquids including choline or chemicals

- high temperature and high humidity such as saunas

- coastal areas which are affected by sea spray


Caution:

Do not cut the LED fixture and the lead wire of outdoor product at a job site.


Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Max. connectable length per power supply					
Length of LED fixture (70% loading factor) *: split into multiple circuits					
15mm pitch	20mm pitch	9.5W	30mm pitch	6.5W	4.5W
~1.9m	~2.8m	~3.6m	~5.3m*	~7.7m*	50W power supply
~3.8m*	~5.7m*	~7.3m*	~10.7m*	~15.5m*	100W power supply
~5.7m*	~8.6m*	~11m*	~16.1m*	~23.3m*	150W power supply

Cross sectional view when installing optional items

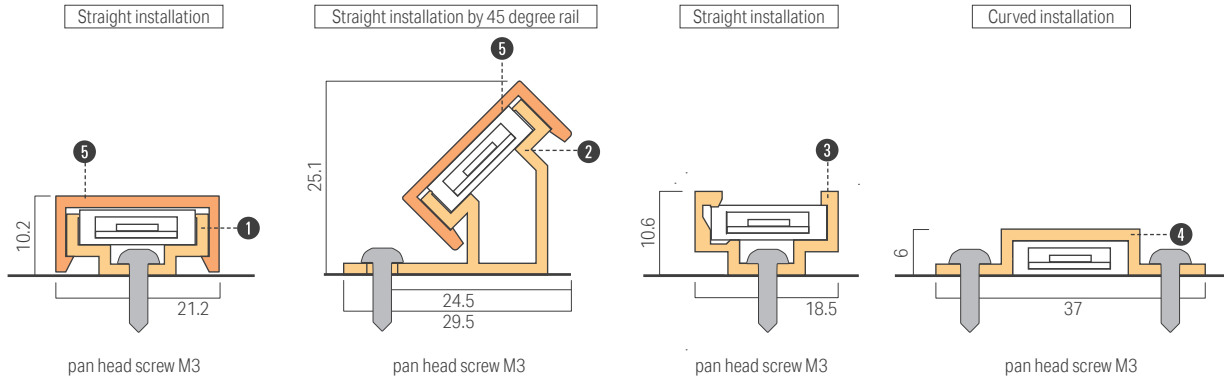


Option parts

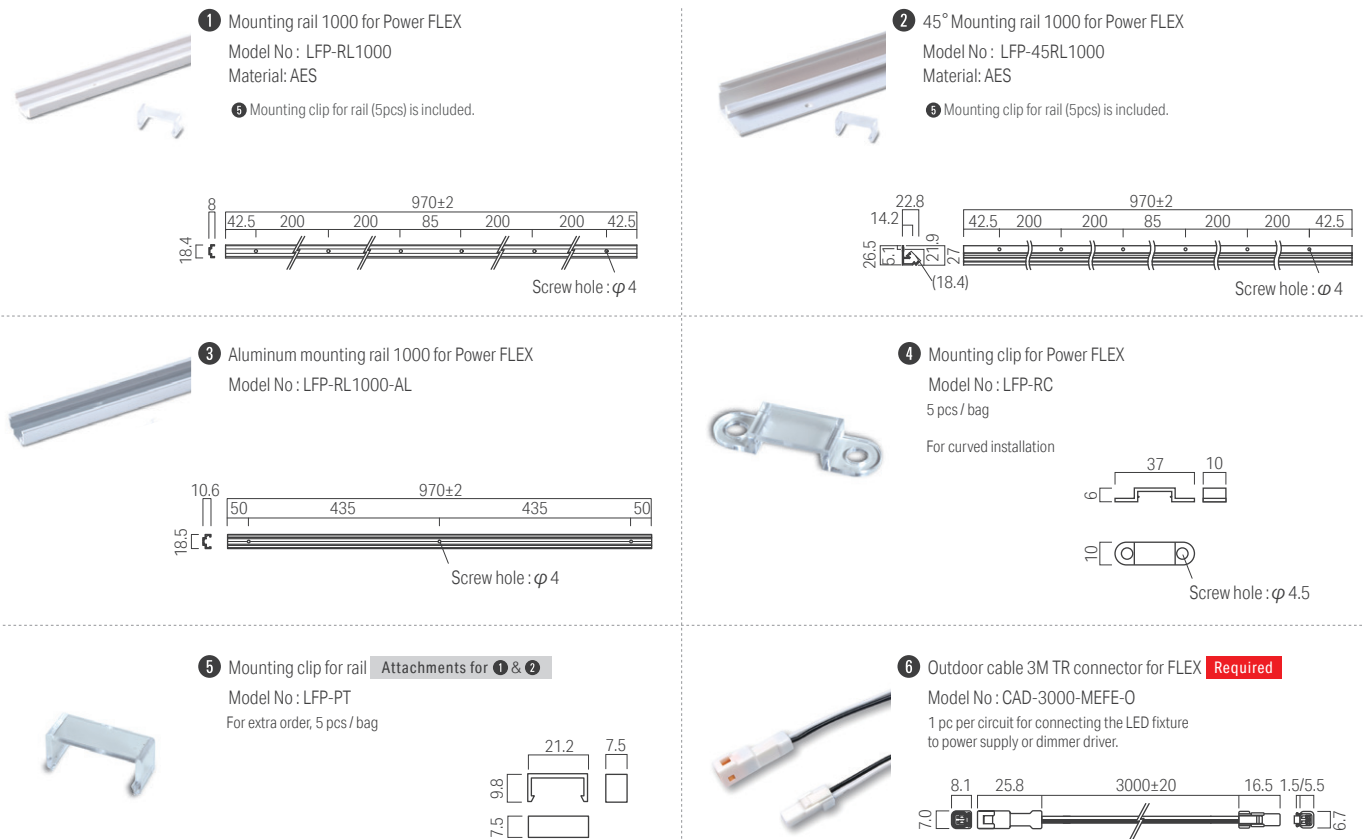


Luci Power FLEX EX IP65

Installing the product


Straight installation

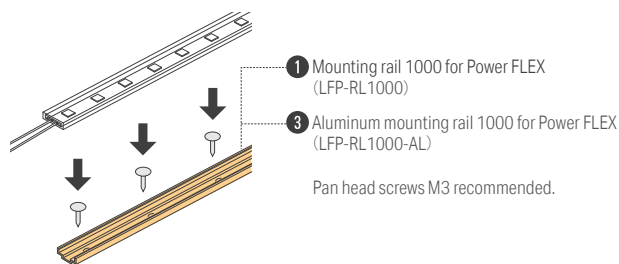

Cove lighting




Cornice lighting




For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m
* In case of Aluminum mounting rail 1000 for Power FLEX, Mounting clip for rail is not necessary.


Straight installation by 45 degree rail

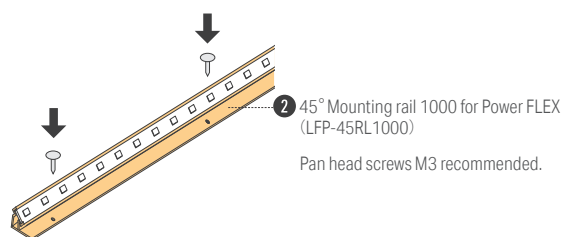

Cove lighting



Cornice lighting



For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m


Curved installation



Minimum bending radius



System configuration diagram

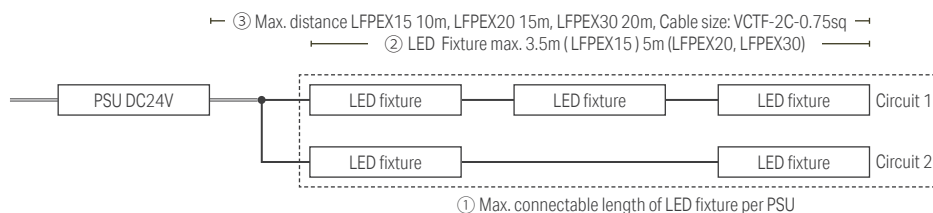

① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)

② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.

③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci Power FLEX EX IP65 -Custom order-

Model No.

LFPEX		T			-		-	CL	-	0	-		
LED Pitch		Length		Lead Wire		Light source color		Tube type		Environment		Wattage	
15 15mm Pitch 20 20mm Pitch 30 30mm Pitch		Refer to "Custom order products size"		W Both ends lead wire S One end lead wire		W Natural white 5300K W White 4200K WW Warm white 3500K 3500K L30 Warm white 3000K 3000K L27 Warm white 2700K 2700K L24 Warm white 2400K 2400K L21 Warm white 2100K 2100K L19 Warm white 1900K 1900K		CL Clear		0 Outdoors		only for LFPEX30 9 9.5W 6 6.5W 4 4.5W	

External dimension

Luci Power FLEX EX IP65 / W Both ends lead wire

The diagram illustrates the physical characteristics of the LED strip:

- Pitch:** The distance between individual LEDs is 16.5 mm.
- Length:** The total length of the strip is 185 cm.
- Color:** The strip is labeled as white (W).
- Wattage:** The power consumption is 11 W/m, totaling 20.25 W for the entire 185 cm strip.

Luci Power FLEX EX IP65 / **S** One end lead wire

LFPEX **-T** **S-** **-CL-O-**

Pitch Length Color Wattage

15

185 25.8

Length

Length +11

- The lead wires are delivered without connectors. Contact us if indoor connectors are needed.

Custom order products size

Luci Power FLEX EX IP65 15mm pitch (18.2 W/m)				
Corresponds to Length of Model No. and External dimensions				
0083	1082	2080	3078	
0166	1165	2163	3162	
0250	1248	2246	3245	
0333	1331	2330	3328	
0416	1414	2413	3411	
0499	1498	2496	3494	
0582	1581	2579		
0666	1664	2662		
0749	1747	2746		
0832	1830	2829		
0915	1914	2912		
1000	2000	3000		

Luci Power FLEX EX IP65 20mm pitch (12.1 W/m)				
Corresponds to Length of Model No. and External dimensions				
0125	1123	2122	3120	4118
0250	1248	2246	3245	4243
0374	1373	2371	3370	4368
0499	1498	2496	3494	4493
0624	1622	2621	3619	4618
0749	1747	2746	3744	4742
0874	1872	2870	3869	4867
1000	2000	3000	4000	5000

<p>Luci Power FLEX EX IP65 30mm pitch (9.5 W/m, 6.5 W/m, 4.5W/m)</p>				
<p>Corresponds to Length of Model No. and External dimensions</p>				
0166	1165	2163	3162	4160
0333	1331	2330	3328	4326
0499	1498	2496	3494	4493
0666	1664	2662	3661	4659
0832	1830	2829	3827	4826
1000	2000	3000	4000	5000

LFP-0




19 Balmoral Road
Location: Singapore
Photo: Robert Such



ROKU KYOTO, LXR Hotels & Resorts
Location: Japan
Owner: TOKYU LAND CORPORATION
Architect office: Tokyu Architects & Engineers INC.

Interior design: BLINK Design Group Pte Ltd
Landscape Design: 10 LANDSCAPE ASSOCIATES
Lighting design: WORKTECHT&Co.
Construct: TAKENAKA CORPORATION

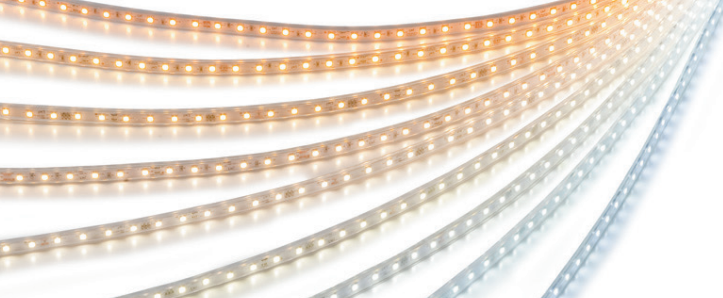

Luci Power FLEX IP65


Luci's longest selling IP65 strip light best use for exterior furniture and facade concealed cove

Short unit lengths for delicate designs, with easy custom length order

Specifications

Dimensions

LED pitch and unit length (mm)

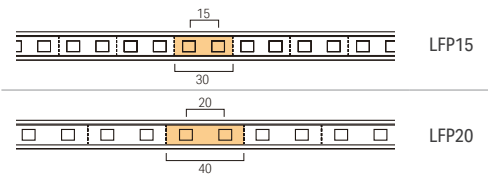

Cross section W 15 x H 4.5 mm
 Standard length 1m with both ends IP67 connector
 Custom order up to 4.5m (LFP15) or 5m (LFP20) length at every unit length with both ends or one end feed cable with IP67 connector

Do not allow to cut the LED fixture and cable at site.

Electrical & Output

Model	LFP15	LFP20
Power Consumption (W/m)	15.4	10.5
Luminous flux @ 3000K (lm/m)	789	510

Color temperature




Min Bending radius

R 50mm in top (vertical) bend direction




Accessories

Mounting rail 1000 for Power FLEX



45° Mounting rail 1000 for Power FLEX



Easy to cut these rails at site as it's made by AES material




Soft acrylic tube

- Higher protection performance than bare LED strip against unexpected static electricity, external force and environmental factors which may cause damage to the circuit board and components.

- Long-lasting characteristics are maintained against deformation, discolouration, and deterioration proved by sunshine weather-resistant tests applied in the automotive industry.

Project reference

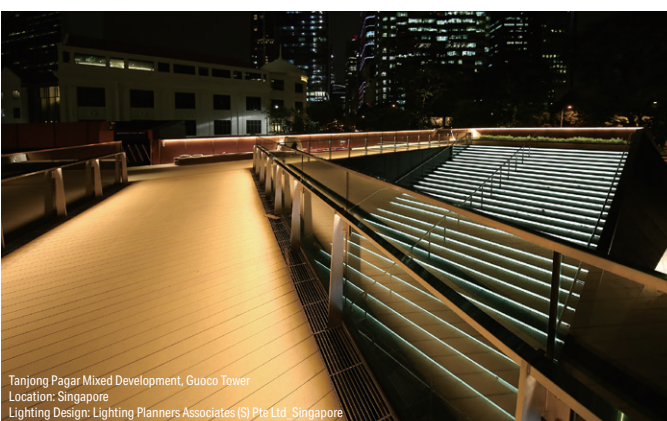


Discontinued

Luci Power FLEX IP65

LFP-0

Color management

ANSI BIN



3


years

warranty

- Customised length available up to 4.5m (LFP15), 5m (LFP20)

- 2 types of wattage and LED pitch: 15.4W/m (LFP15), 10.5W/m (LFP20)

- Covered with soft acrylic tube

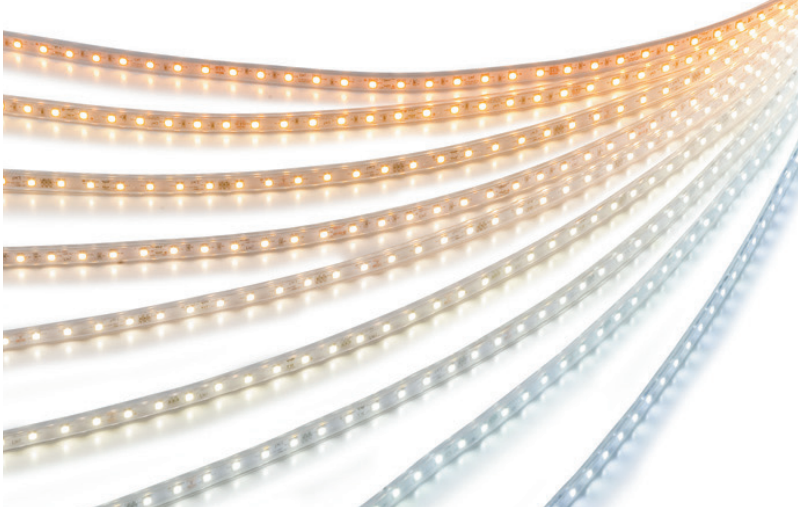

Model No.

LFP - T - - - O

Product Name / LED pitch

LFP15: 15mm pitch

LFP20: 20mm pitch

Length / Lead wire

Custom order length P.201

W: Both ends
S: One ends

Light source color


D : Daylight white
N : Natural white
W : White
WW : Warm white 3500K
L30 : Warm white 3000K
L27 : Warm white 2700K
L24 : Warm white 2400K
L19 : Warm white 1900K
B : Blue

Tube type

CL: Clear
DF: Diffuser

Environment

O: Outdoor



Specification @ Clear cover

LED pitch	15mm pitch	20mm pitch
Model No.	LFP15-T0900W- -CL-O	LFP20-T1000W- -CL-O
Power consumption	13.9W/900mm	10.5W/m
Fitting length	911mm	1011mm
Weight	55g	60g
Cuttable unit	N/A	N/A
Luminaire efficacy (2700K)	65.8 lm/W	62.6 lm/W
Light source color	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.	
D 7100K Ra90	* 875lm	* 698lm
N 5300K Ra90	* 875lm	* 639lm
W 4200K Ra90	○ 818lm	○ 667lm
WW 3500K Ra90	○ 774lm	○ 639lm
L30 3000K Ra90	○ 710lm	○ 579lm
L27 2700K Ra90	○ 711lm	○ 563lm
L24 2400K Ra90	○ 608lm	○ 459lm
L19 1900K Ra70	* -lm	* 512lm
B	*	*


General Specification

Input voltage	DC24V
LED beam angle	120°
Environment	In/Outdoor (no condensation) IP65
Max. length per circuit	15 mm pitch : 4.5m 20 mm pitch : 5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachments	-
Option parts	①②③④ Mounting rail ⑤⑥ Mounting clip ⑦ Power supply cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits		Power supply
15mm pitch	20mm pitch	
~2.2m	~3.3m	50W power supply
~4.5m	~6.6m*	100W power supply
~6.8m*	~10m*	150W power supply

External dimensions

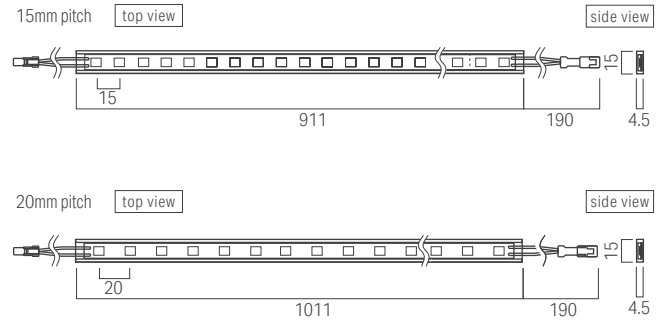


Prohibited installation places:


- direct expose to water / pooling of water
- direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray

Caution:







Do not cut the LED fixture and the lead wire of outdoor product at a job site. Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.



Cross sectional view when installing optional items

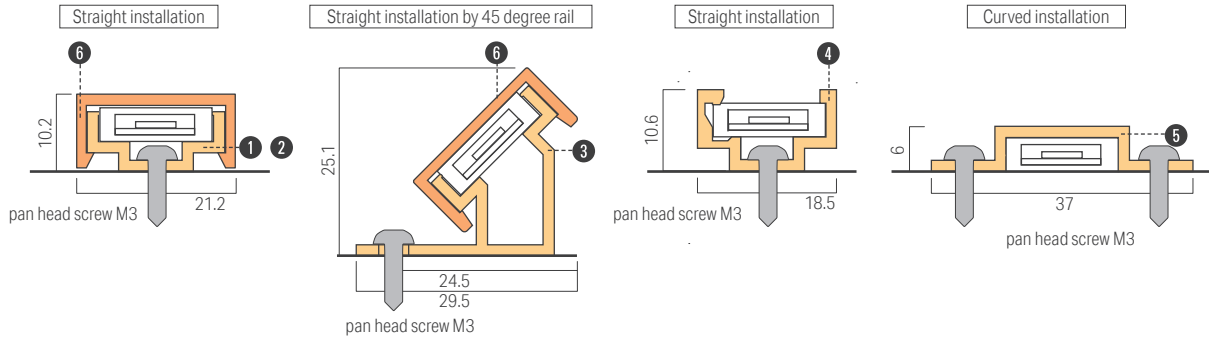


Option parts

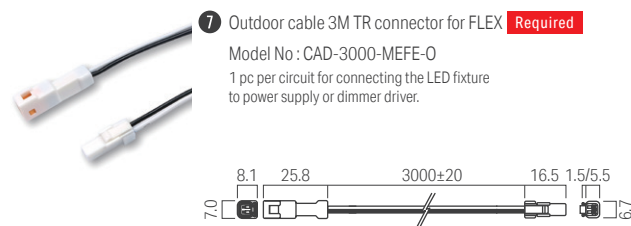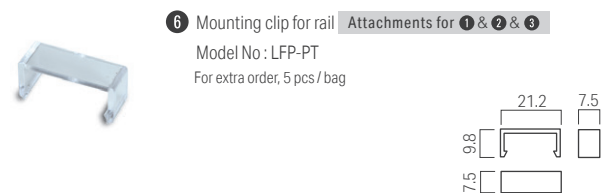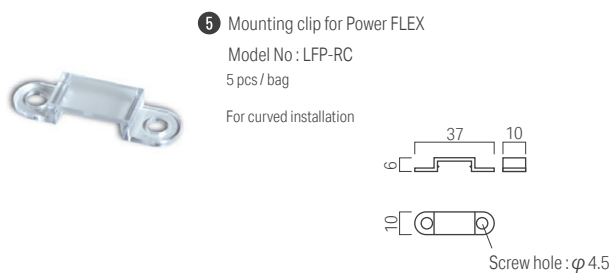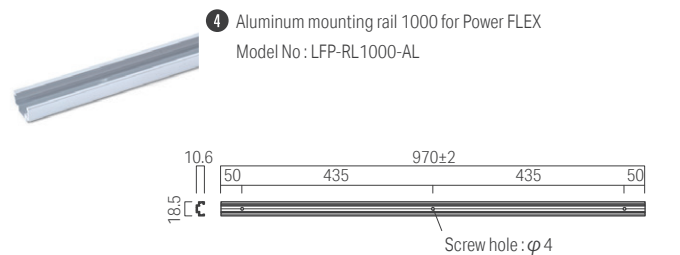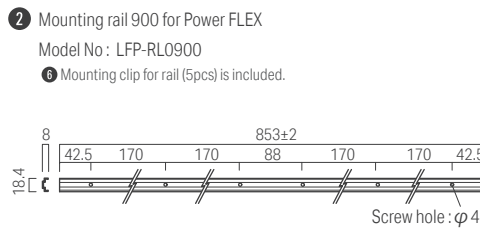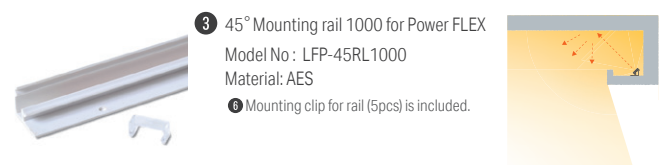


Luci Power FLEX IP65

Installing the product


Straight installation

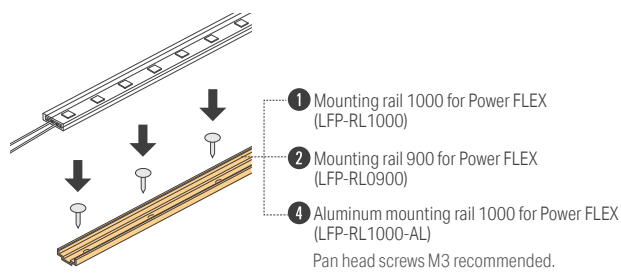

Cove lighting




Cornice lighting




For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m
* In case of Aluminum mounting rail 1000 for Power FLEX, Mounting clip for rail is not necessary.


Straight installation by 45 degree rail

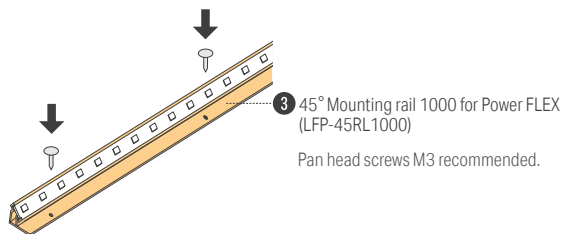

Cove lighting



Cornice lighting



For downward installation, mounting clips for rail can prevent falling.
Recommended: 5 pcs per 1 m


Curved installation



Minimum bending radius



System configuration diagram

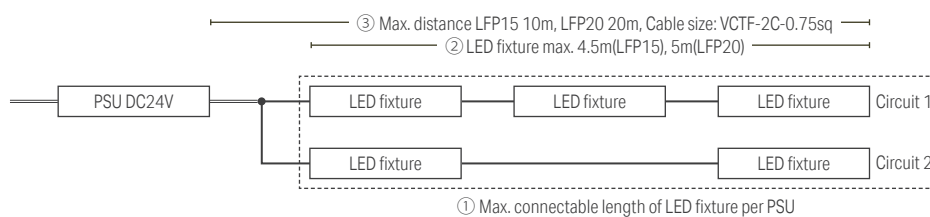

- 1 Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- 2 If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- 3 To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci Power FLEX IP65 -Custom order-


Model No.

LFP - **T** - - - - **O**


LED Pitch	Length	Lead Wire	Light source color	Tube type	Environment
15 15mm Pitch 20 20mm Pitch	Refer to "Custom order products size"	W Both ends lead wire S One end lead wire	D Daylight white 7100K N Natural white 5300K W White 4200K WW Warm white 3500K 3500K L30 Warm white 3000K 3000K L27 Warm white 2700K 2700K L24 Warm white 2400K 2400K L19 Warm white 1900K 1900K B Blue Blue	CL Clear DF Diffuser	O Outdoor

External dimension

Luci Power FLEX IP65 / **W** Both ends lead wire

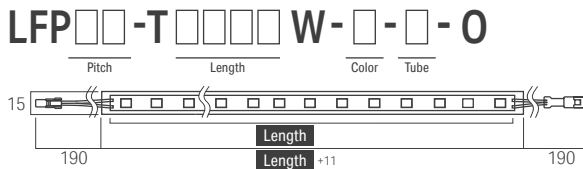

Luci Power FLEX IP65 / **S** One end lead wire

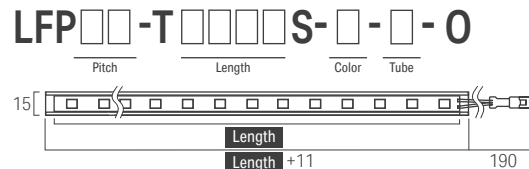

Custom order products size

Luci Power FLEX IP65 15mm pitch (15.4 W/m)					
Corresponds to Length of Model No. and External dimensions					
0030	0930	1830	2730	3630	
0060	0960	1860	2760	3660	
0090	0990	1890	2790	3690	
0120	1020	1920	2820	3720	
0150	1050	1950	2850	3750	
0180	1080	1980	2880	3780	
0210	1110	2010	2910	3810	
0240	1140	2040	2940	3840	
0270	1170	2070	2970	3870	
0300	1200	2100	3000	3900	
0330	1230	2130	3030	3930	
0360	1260	2160	3060	3960	
0390	1290	2190	3090	3990	
0420	1320	2220	3120	4020	
0450	1350	2250	3150	4050	
0480	1380	2280	3180	4080	
0510	1410	2310	3210	4110	
0540	1440	2340	3240	4140	
0570	1470	2370	3270	4170	
0600	1500	2400	3300	4200	
0630	1530	2430	3330	4230	
0660	1560	2460	3360	4260	
0690	1590	2490	3390	4290	
0720	1620	2520	3420	4320	
0750	1650	2550	3450	4350	
0780	1680	2580	3480	4380	
0810	1710	2610	3510	4410	
0840	1740	2640	3540	4440	
0870	1770	2670	3570	4470	
0900	1800	2700	3600	4500	

Luci Power FLEX IP65 20mm pitch (10.5 W/m)					
Corresponds to Length of Model No. and External dimensions					
0040	1040	2040	3040	4040	
0080	1080	2080	3080	4080	
0120	1120	2120	3120	4120	
0160	1160	2160	3160	4160	
0200	1200	2200	3200	4200	
0240	1240	2240	3240	4240	
0280	1280	2280	3280	4280	
0320	1320	2320	3320	4320	
0360	1360	2360	3360	4360	
0400	1400	2400	3400	4400	
0440	1440	2440	3440	4440	
0480	1480	2480	3480	4480	
0520	1520	2520	3520	4520	
0560	1560	2560	3560	4560	
0600	1600	2600	3600	4600	
0640	1640	2640	3640	4640	
0680	1680	2680	3680	4680	
0720	1720	2720	3720	4720	
0760	1760	2760	3760	4760	
0800	1800	2800	3800	4800	
0840	1840	2840	3840	4840	
0880	1880	2880	3880	4880	
0920	1920	2920	3920	4920	
0960	1960	2960	3960	4960	
1000	2000	3000	4000	5000	


Color temperature of diffuser tube type

Nominal light source color temperature (clear tube)		Color temperature through diffuser tube *1
D	7100 K	4300 K
N	5300 K	3800 K
W	4200 K	3300 K
WW	3500 K	2800 K
L30	3000 K	2500 K
L27	2700 K	2200 K
L24	2400 K	1900 K

*1:

The optical data provided on the above is for reference only. Due to the tolerances of the production process, values for color temperature can vary $\pm 10\%$. The lumen output value of diffuser tube type is 20~30% less than clear tube type.

In addition, non-uniform color among each package may be more pronounced when using the diffuser tube.

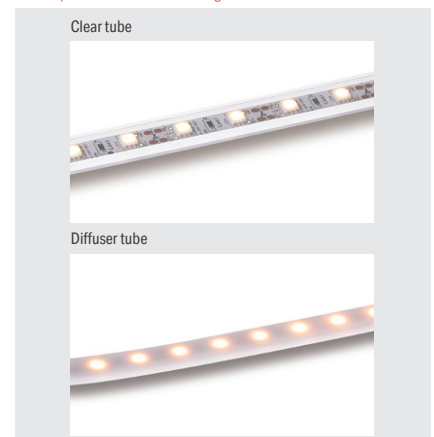

Luci Flat FLEX F IP65

LFTF-0



Kanazawa Castle Park Nezumitamom Bridge Slope at OYAMA shrine side
Location: Japan
Client: Ishikawa Prefecture

Lighting design: Reiko Chikada Lighting Design Inc.
Construction: NAKA CORPORATION
Photo: NAKA CORPORATION



Gardens by the Bay, Cloud Forest
Location: Singapore
Lighting Design: Lighting Planners Associates




Luci Flat FLEX F IP65

Low power IP65 strip light with narrow LED pitch
ideal for concealed light in low lux level
High transparency soft acrylic tube for high efficiency,
easy installation and maintenance

Specifications

Dimensions

LED pitch and unit length (mm)

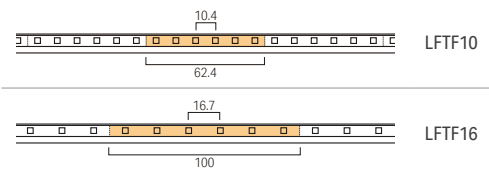


Cross section W 10 x H 4 mm
Standard length 1m with both ends IP67 connector
Custom order up to 5m length at every unit length with both ends or one end feed cable with IP67 connector
Do not allow to cut the LED fixture and cable at site

Electrical & Output


Model	LFTF10	LFTF16
Power Consumption (W/m)	3.9	2.5
Luminous flux @ 3000K (lm/m)	300	187

Color temperature



Min Bending radius

R 50mm in top (vertical) bend direction



Project reference



Discontinued

Luci Flat FLEX F IP65

LFTF-0

Color management
ANSI BIN

CE



3 years
warranty

- Customized length available up to 5m per roll
- 2 types of wattage and LED pitch: 3.9W/m (LFTF10), 2.5W/m(LFTF16)
- Covered with soft acrylic tube



Model No.

LFTF - T - - - O

Product Name / LED pitch

LFTF10 : 10mm pitch

LFTF16 : 16mm pitch

Length / Lead wire

Custom order length P.207

W : Both ends
S : One ends

Light source color

D : Daylight white
N : Natural white
W : White
WW : Warm white 3500K
L30 : Warm white 3000K
L27 : Warm white 2700K
L24 : Warm white 2400K

Tube type

CL : Clear
DF : Diffuser

Environment

O : Outdoor



Specification @ Clear cover

LED pitch	10mm pitch	16mm pitch
Model No.	LFTF10-T1000W- -CL-O	LFTF16-T1000W- -CL-O
Power consumption	3.9W/m	2.5W/m
Fitting length	1010mm	1010mm
Weight	40g	40g
Unit length	62.4mm (6 LED)	100mm (6 LED)
Luminaire efficacy (2700K)	72.3 lm/W	70.4 lm/W
Light source color	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.	
D 7100K Ra94	* 324lm	* -lm
N 5300K Ra94	* 329lm*	* -lm
W 4200K Ra90	○ 294lm	○ -lm
WW 3500K Ra90	○ 305lm	○ -lm
L30 3000K Ra90	○ 300lm	○ 187lm*
L27 2700K Ra87	○ 282lm	○ 176lm*
L24 2400K Ra83	○ 229lm*	○ 143lm*
L19 1900K	-	-


General Specification	
Input voltage	DC24V
LED beam angle	120°
Environment	In/Outdoor (no condensation) IP65
Max. length per circuit	5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachments	-
Option parts	① Mounting rail ② ③ Mounting clip ④ Power supply cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

Max. connectable length per power supply		
Length of LED fixture (70% loading factor) *: split into multiple circuits		Power supply
10mm pitch	16mm pitch	
~9m*	~14m*	50W power supply
~18m*	~28m*	100W power supply
~27m*	~42m*	150W power supply

Light Intensity Refer to P.78



External dimensions

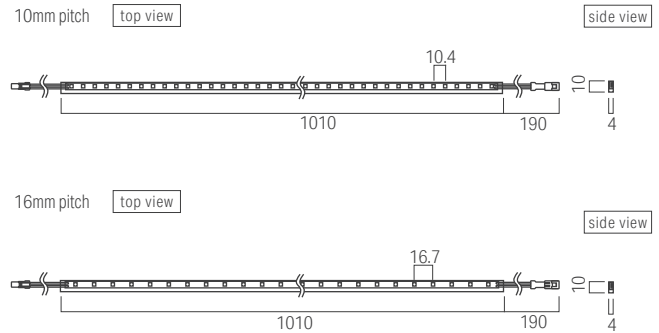


- Prohibited installation places:
- direct expose to water / pooling of water
- direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray


Caution:

Do not cut the LED fixture and the lead wire of outdoor product at a job site.





Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.



Cross sectional view when installing optional items

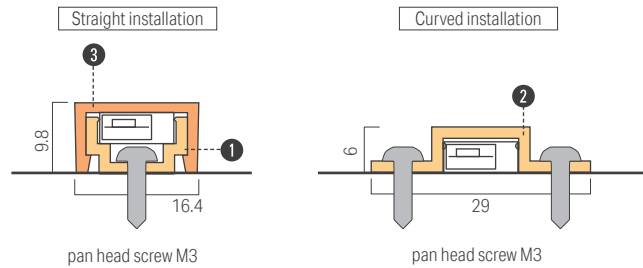




Option parts

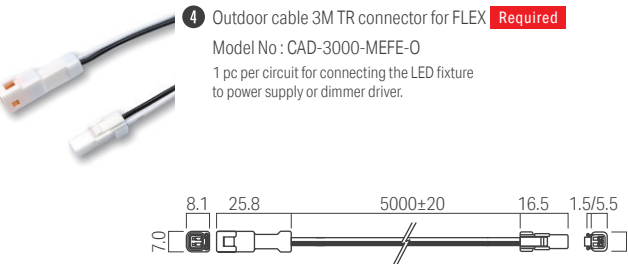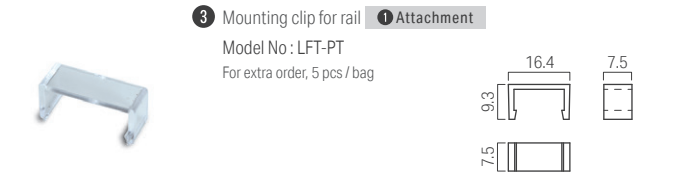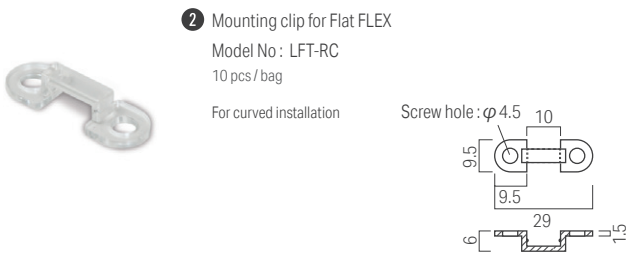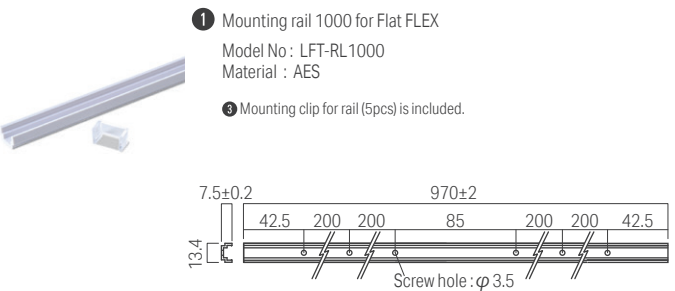



Luci Flat FLEX F IP65

Installing the product


Straight installation

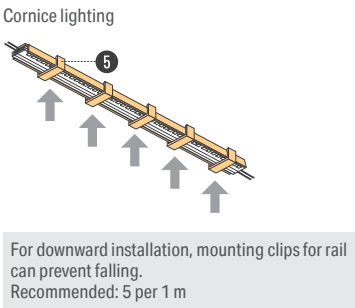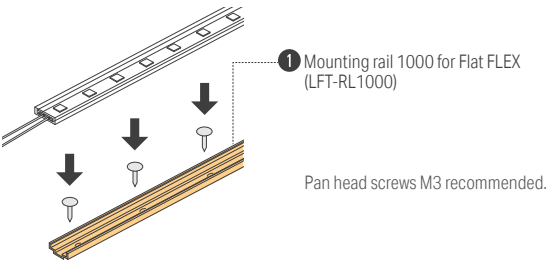

Curved installation

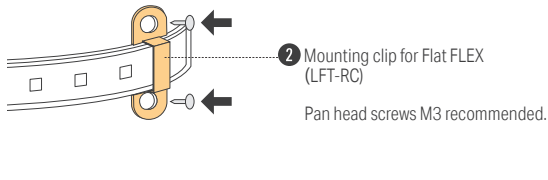

System configuration diagram

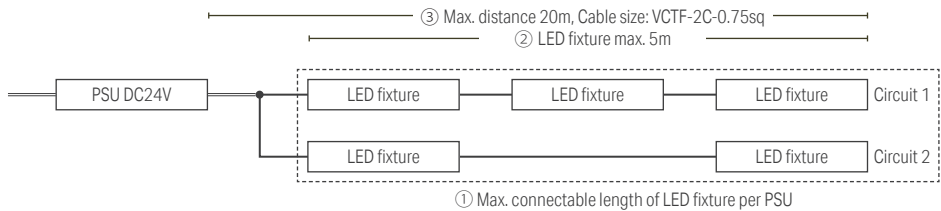

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci Flat FLEX F IP65 -Custom order-


Model No.

LFTF - **T** - - - - **O**


LED Pitch	Length	Lead Wire	Light source color	Tube type	Environment
10 10mm Pitch 16 16mm Pitch	Refer to "Custom order products size"	W Both ends lead wire S One end lead wire	D Daylight white 7100K N Natural white 5300K W White 4200K WW Warm white 3500K 3500K L30 Warm white 3000K 3000K L27 Warm white 2700K 2700K L24 Warm white 2400K 2400K	CL Clear DF Diffuser	O Outdoor

External dimension

Luci Flat FLEX F IP65 / **W** Both ends lead wire

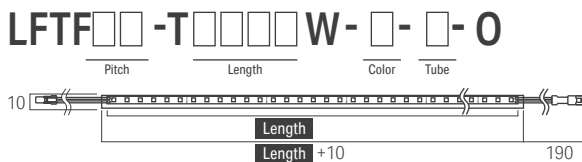

Luci Flat FLEX F IP65 / **S** One end lead wire

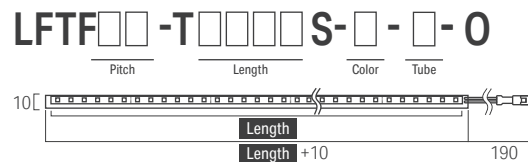

Custom order products size

Luci Flat FLEX F IP65 10mm pitch (3.9 W/m)				
Corresponds to Length of Model No. and External dimensions				
0063	1063	2063	3063	4063
0125	1125	2125	3125	4125
0188	1188	2188	3188	4188
0250	1250	2250	3250	4250
0313	1313	2313	3313	4313
0375	1375	2375	3375	4375
0438	1438	2438	3438	4438
0500	1500	2500	3500	4500
0563	1563	2563	3563	4563
0625	1625	2625	3625	4625
0688	1688	2688	3688	4688
0750	1750	2750	3750	4750
0813	1813	2813	3813	4813
0875	1875	2875	3875	4875
0938	1938	2938	3938	4938
1000	2000	3000	4000	5000


Luci Flat FLEX F IP65 16mm pitch (2.5 W/m)				
Corresponds to Length of Model No. and External dimensions				
0100	1100	2100	3100	4100
0200	1200	2200	3200	4200
0300	1300	2300	3300	4300
0400	1400	2400	3400	4400
0500	1500	2500	3500	4500
0600	1600	2600	3600	4600
0700	1700	2700	3700	4700
0800	1800	2800	3800	4800
0900	1900	2900	3900	4900
1000	2000	3000	4000	5000

Color temperature of diffuser tube type

Nominated Light source color (clear tube)	Color temperature through diffuser tube*1	
D	7100 K	5200 K
N	5300 K	4400 K
W	4200 K	3700 K
WW	3500 K	3000 K
L30	3000 K	2700 K
L27	2700 K	2400 K
L24	2400 K	2100 K

*1:

The optical data provided on the above is for reference only. Due to the tolerances of the production process, values for color temperature can vary $\pm 10\%$. The lumen output value of diffuser tube type is 20~30% less than clear tube type.

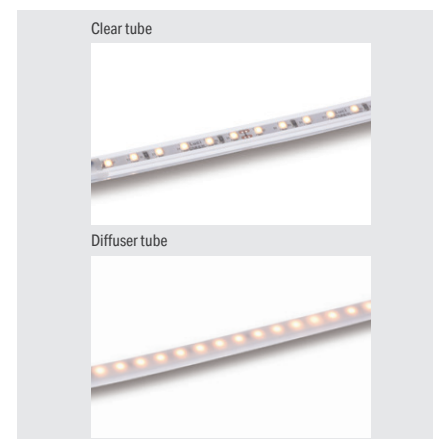

Outdoor
Strip light

LFXF-0 Luci FLEX α F IP65



Luci FLEX α F IP65

LFXF-0



Panorama
Location: Singapore
Photo: Robert Such



The Prince Gallery Tokyo Kioicho
Location: Japan
Architect Office: Nikken Sekkei Ltd
Interior Design: Rockwell Group, Europe

Lighting Design: Lighting Planners Associates
Construction: KAJIMA CORPORATION / TEKKEN CORPORATION / Kumagai Gumi Co.,Ltd. Consortium
Photo: TOSHIO KANEKO




Luci FLEX α F IP65

Side bend flexible strip with clear or diffused soft acrylic tube
Only 4mm thickness with side view LED package,
suitable for limited space installation
Customized length available up to 5m per roll

Specifications

Dimensions

LED pitch and unit length (mm)



Cross section W 10 x H 4 mm
Standard length 1m with both ends IP67 connector
Custom order up to 5m length at every unit length with both ends or one end feed cable with IP67 connector
Do not allow to cut the LED fixture and cable at site.


Electrical & Output

Model	LFXF10
Power Consumption (W/m)	4.2
Luminous flux @ 3000K (lm/m)	292


TIPS: Handrail

With the cross section of 4 x 10 mm, it is ideal for handrail lighting.
The luminaires can be connected in series for up to 5 m. For installation through cables in posts or walls, the cable length can be customised according to site requirements.


Feeding power from a post

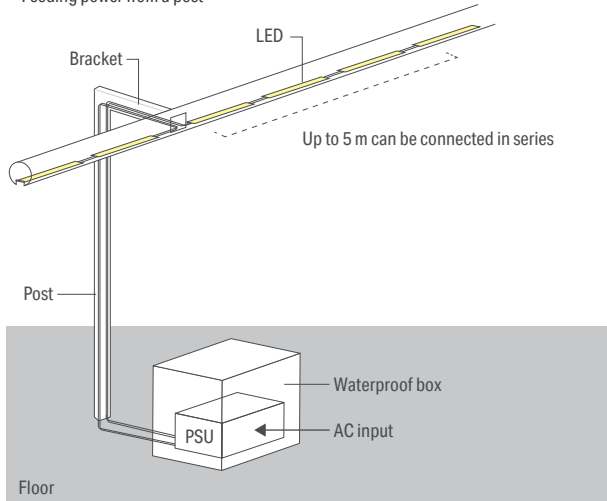

Feeding power from a wall

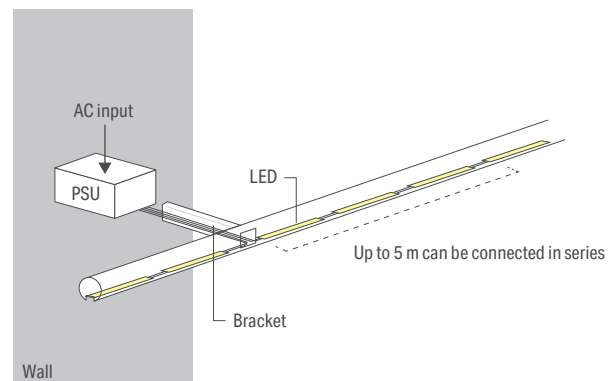

Project reference

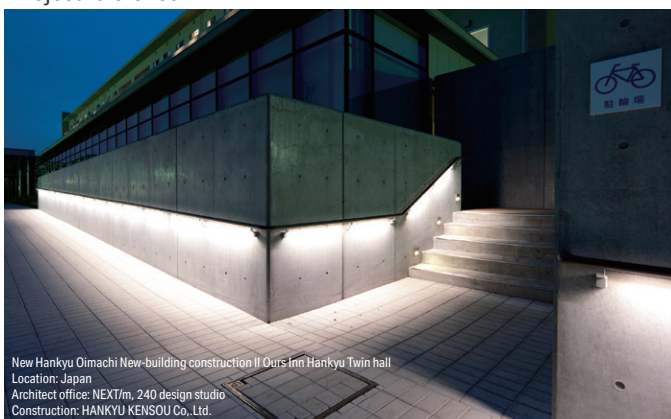

LFXF-0

Color management
ANSI BIN



3 years
warranty

- Flexible strip with bending sideways
- Customised length available up to 5m per roll, 62.5mm increments
- Covered with soft acrylic tube




Model No.

LFXF - **T** - - - **0**

Product Name / LED pitch	Length / Lead wire	Light source color	Tube type	Environment
LFXF10	Custom order length P.213	D : Daylight white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K	CL : Clear DF : Diffuser	O : Outdoor
	W : Both ends S : One ends			

Light Intensity Refer to P.94



Specification @ Clear cover

LED pitch	10mm pitch		
Model No.	LFXF10-T1000W-□-CL-O		
Wattage	4.2W/m		
Fitting length(L)	1010mm		
Weight	40g		
Unit length	62.5mm (6 LED)		
Luminaire efficacy(2700K)	66.3 lm/W		
Light source color	○ = Device inventory * = Equivalent * = Please contact us since it is made-to-order products and has MOQ.		
D 7100K Ra74	* 329lm*		
N 5300K	-		
W 4200K Ra70	○ 317lm*		
WW 3500K Ra75	○ 298lm*		
L30 3000K Ra70	○ 292lm*		
L27 2700K Ra71	○ 278lm		
L24 2400K Ra65	* 251lm*		
L19 1900K	-		


General Specification

Input voltage	DC24V
LED beam angle	120°
Environment	In/Outdoor (no condensation) IP65
Max. length per circuit	5m
Min. bending range	R50mm
Material (body)	Soft acrylic
Attachments	-
Option parts	① Mounting rail ② Mounting parts ③ ④ Mounting clip ⑤ Power supply cable
Certification	CE, BIS
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

Max. connectable length per power supply


Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~8.3m*	50W power supply
~16.7m*	100W power supply
~25.1m*	150W power supply

External dimensions

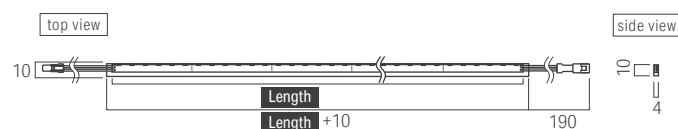

Prohibited installation places:


- direct expose to water / pooling of water
- direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas
- coastal areas which are affected by sea spray



Caution:

Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Cross sectional view when installing optional items

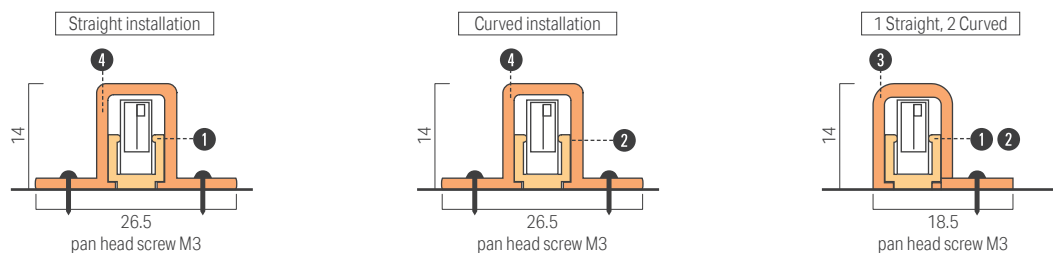


Option parts

1 Mounting rail 1000 for FLEX α

Model No : LFX-RL1000

1 Mounting clip for FLEX α rail (10 pcs / bag) is included.



2 Mounting parts for FLEX α


Model No : LFX-RL0015

10 pcs / bag

1 Mounting clip for FLEX α rail (10 pcs / bag) is included.



For curved installation




3 Mounting clip B for FLEX α

Model No : LFX-RC-B

10 pcs / bag

Narrower clip used with rail 1 or parts 2




4 Mounting clip 1000 for FLEX α rail

Attachments for 1 & 2

Model No : LFX-RC

for extra order, 10 pcs / bag



5 Outdoor cable 3M TR connector for FLEX **Required**

Model No : CAD-3000-MEFE-O


1 pc per circuit for connecting the LED fixture to power supply or dimmer driver.




Luci FLEX α F IP65

Installing the product


Straight installation

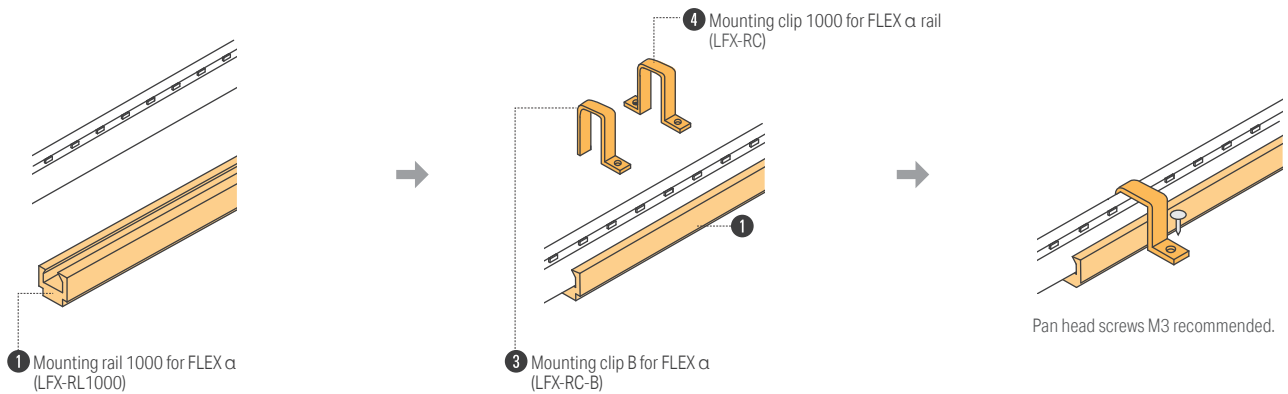

Curved installation

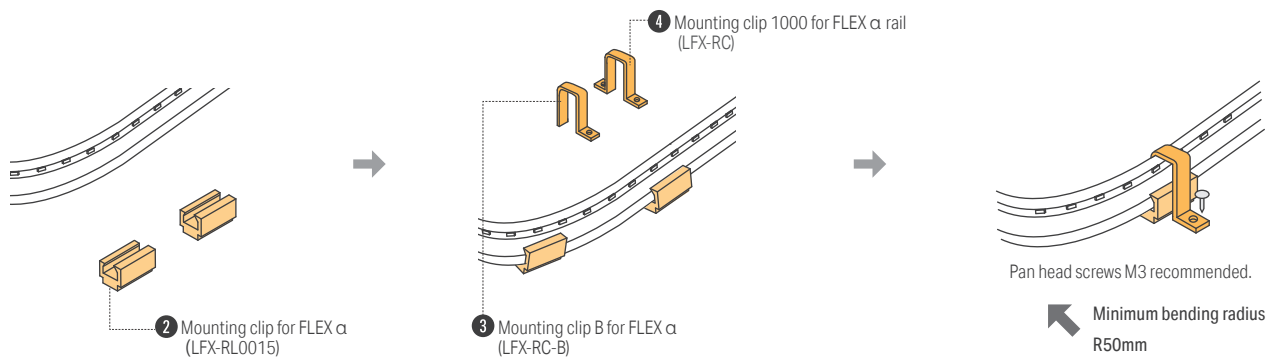

System configuration diagram

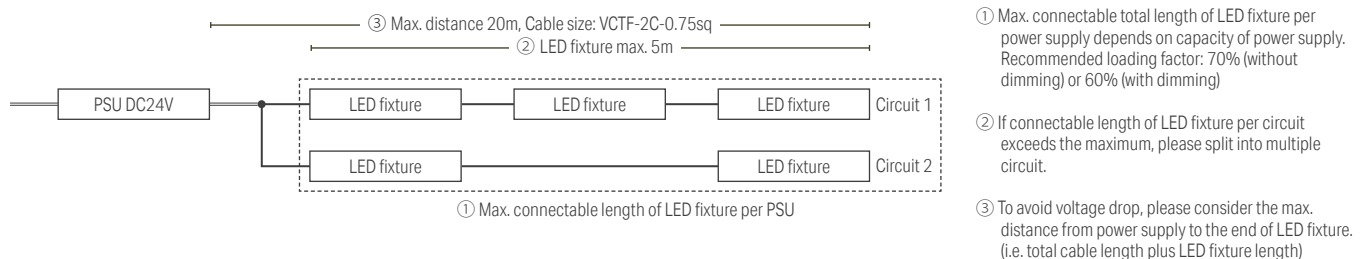

Luci FLEX α F IP65 -Custom order-

Model No.


LFXF10 - T **-** **-** **-** **-** **O**

Length	Lead Wire	Light source color	Tube type	Environment
Refer to "Custom order products size"	W Both ends lead wire S One end lead wire	D Daylight white 7100K	CL Clear DF Diffuser	O Outdoor
		W White 4200K		
		WW Warm white 3500K 3500K		
		L30 Warm white 3000K 3000K		
		L27 Warm white 2700K 2700K		
		L24 Warm white 2400K 2400K		

External dimension


Luci FLEX α F IP65 / **W** Both ends lead wire

LFXF10 - T **W -** **-** **-** **O**



Luci FLEX α F IP65 / **S** One end lead wire

LFXF10 - T **S -** **-** **-** **O**



Custom order products size


Luci FLEX α F IP65 10mm pitch (4.2 W/m)				
Corresponds to Length of Model No. and External dimensions				
0063	1063	2063	3063	4063
0125	1125	2125	3125	4125
0188	1188	2188	3188	4188
0250	1250	2250	3250	4250
0313	1313	2313	3313	4313
0375	1375	2375	3375	4375
0438	1438	2438	3438	4438
0500	1500	2500	3500	4500
0563	1563	2563	3563	4563
0625	1625	2625	3625	4625
0688	1688	2688	3688	4688
0750	1750	2750	3750	4750
0813	1813	2813	3813	4813
0875	1875	2875	3875	4875
0938	1938	2938	3938	4938
1000	2000	3000	4000	5000

Color temperature of diffuser tube type

Nominal light source color temperature (clear tube)		Color temperature through diffuser tube *1
D	7100 K	5600 K
W	4200 K	3800 K
WW	3500 K	3300 K
L30	3000 K	2900 K
L27	2700 K	2500 K
L24	2400 K	2200 K

*1:

The optical data provided on the above is for reference only. Due to the tolerances of the production process, values for color temperature can vary $\pm 10\%$. The lumen output value of diffuser tube type is 20~30% less than clear tube type.

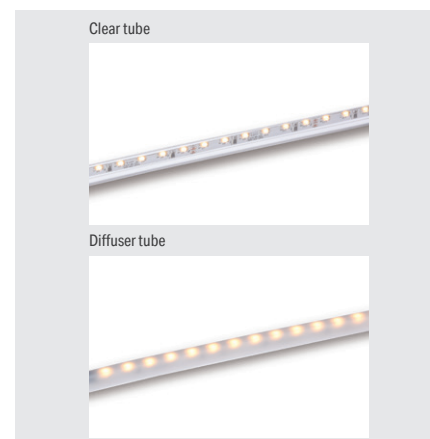

Luci EFRO IP65

LRO



MEGALOS Koiwa
Location: Japan
Lighting design: DAIKO ELECTRIC CO.,LTD.
Photo: Nomura Real Estate Life & Sports Co.,Ltd.



Mia Saigon, Luxury Collection Hotel
Location: Vietnam
Lighting design: LUMINO DESIGN



Luci EFRO IP65

Double waterproof and moisture-proof structure, suitable for shower rooms and landscapes. Round shape with high efficiency with adjustable clip for cove light and aluminum channel for surface wall mount

Specifications


Dimensions

Cross section W 25 x H 36 mm including clip

Standard length 5 types of fixed length

1142	862
582	302
162	

Color temperature



Electrical & Output

Power Consumption (W/1142mm) 7.3

Luminous flux @ 3000K (lm/1142mm) 686

Features

- Gasket between the end cap and tube
- Fuse on circuit board against unexpected over current
- Sealed by special glue at the end cap and tube
- IP67 screw fixing connector
- Coated circuit board for prevention against humidity




Accessories

Mounting clip for EFRO




Connectors can be put under LED fixture



Adjustable angle for cove light


Aluminium mounting rail for EFRO




Optional aluminum channel for surface wall mounting




Project reference



Y's Residence
Location: Japan
Architect office: Daisuke Ohguni Architect & Associates
Lighting Design: ILLUMINATION OF CITY ENVIRONMENT



CLIO Komazawakouen show room
Location: JAPAN
Owner: MEIWA ESTATE CO., LTD.
Interior design: KAN DESIGNING OFFICE LTD.
Lighting design office: WORKTECH CORPORATION
Construction: ONE DESIGNS Co., Ltd.

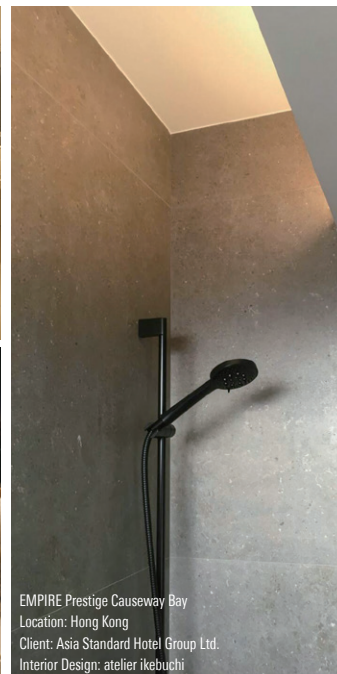

EMPIRE Prestige Causeway Bay
Location: Hong Kong
Client: Asia Standard Hotel Group Ltd.
Interior Design: atelier ikebuchi

LRO

Color management
MacAdam 3 step




- Steam-proof which passed Japanese humidity test
- For bathroom or Spa usage
- Aluminium mounting rail for surface mount



Model No.

Product Name	Length	Light source color	Cover type	Environment
LRO	0162 0302 0582 0862 1142	W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K	DF: Diffuser	IW : IP65 (Indoor / Semi-outdoor)

Light Intensity Refer to P.220



Specification

Length	0162	0302	0582	0862	1142
Model No.	LRO-0162-□-DF-IW	LRO-0302-□-DF-IW	LRO-0582-□-DF-IW	LRO-0862-□-DF-IW	LRO-1142-□-DF-IW
Power consumption	0.9W	1.8W	3.6W	5.4W	7.3W
Fitting length(L)	162mm	302mm	582mm	862mm	1142mm
Weight	62g	100g	172g	234g	310g
Luminaire efficacy(2700K)	90.3 lm/W	90.3 lm/W	90.3 lm/W	90.3 lm/W	90.3 lm/W
Light source color	○ = Device inventory * = Equivalent				
D 7100K	-	-	-	-	-
N 5000K	-	-	-	-	-
W 4000K Ra94	○ 91 lm	○ 182 lm	○ 364 lm	○ 546 lm	○ 738 lm
WW 3500K Ra94	○ 88 lm	○ 176 lm	○ 351 lm	○ 527 lm	○ 712 lm
L30 3000K Ra93	○ 85 lm	○ 169 lm	○ 338 lm	○ 507 lm	○ 686 lm
L27 2700K Ra93	○ 81 lm	○ 163 lm	○ 325 lm	○ 488 lm	○ 659 lm
L24 2400K Ra93	○ 75 lm	○ 150 lm	○ 299 lm	○ 449 lm	○ 606 lm
L21 2100K	-	-	-	-	-

Spec may be subject to change without announcement.

The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification


Input voltage	DC24V
Environment	Bathroom, semi-outdoor, Moistureproof (IP65) ^{*1}
Max. length per circuit	4.5m
Material (body)	Polycarbonate, PVC cable, IP65 connector
Material (cover, clip)	Polycarbonate
Material (mounting rail)	Aluminum
Attachments	① Mounting clip 2pcs for 582mm or shorter 3pcs for 862mm or longer
Accessories	① Mounting clip ② Mounting rail ③ Power supply cable
Certification	CE, Complied with JIS0920, IP65
Operating temperature	0°C ~ +35°C (No Condensation)
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

^{*1} Installing in a sauna, bathroom/shower room operated 24 hours a day is not allowed.

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~5.5m	50W power supply
~11.0m*	100W power supply
~16.6m*	150W power supply

External dimensions

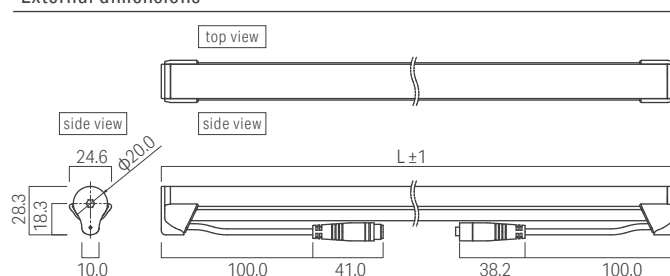


Prohibited installation places:

When using EFRO in semi-outdoor, it must be installed with the aluminum rail for EFRO. Please installed the LED fixture and the cable within the range of 45° eaves of the roof and 300 mm or more away from the ground or the floor. Please do not install the LED fixture and cables in the follow place:


- direct expose to water or pooling of water
- direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas and public bath
- coastal areas which are affected by sea spray

Caution
Do not cut the LED fixture and the lead wire of outdoor product at a job site. Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Cross sectional view




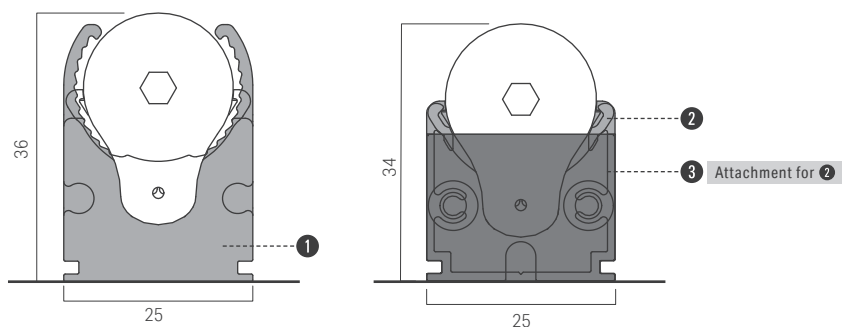


Option parts

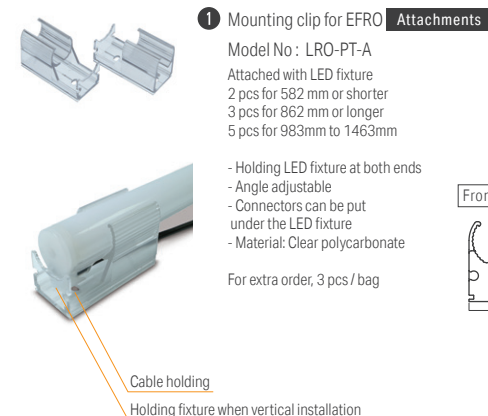

Cautions: Use accurate number of Mounting parts
Install 3pcs of Mounting clips at the middle and both edge sides of LED fixture if the LED fixture is longer than 862mm. Otherwise, the LED fixture will bow by its weight and may defect.

- Number of Mounting clips (LRO-PT-A)
2 pcs for 582 mm or shorter
3 pcs for 862 mm or longer

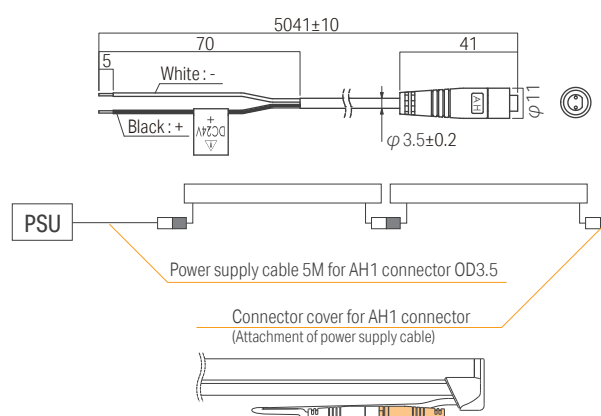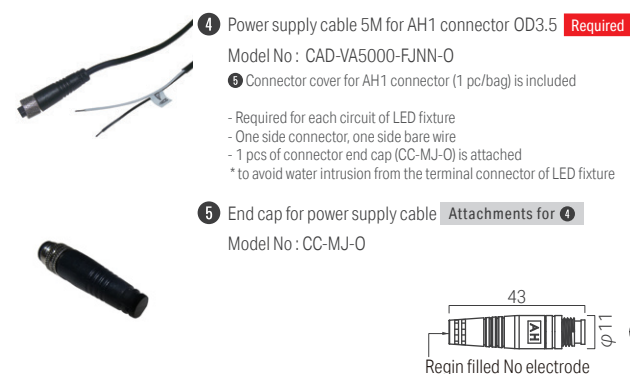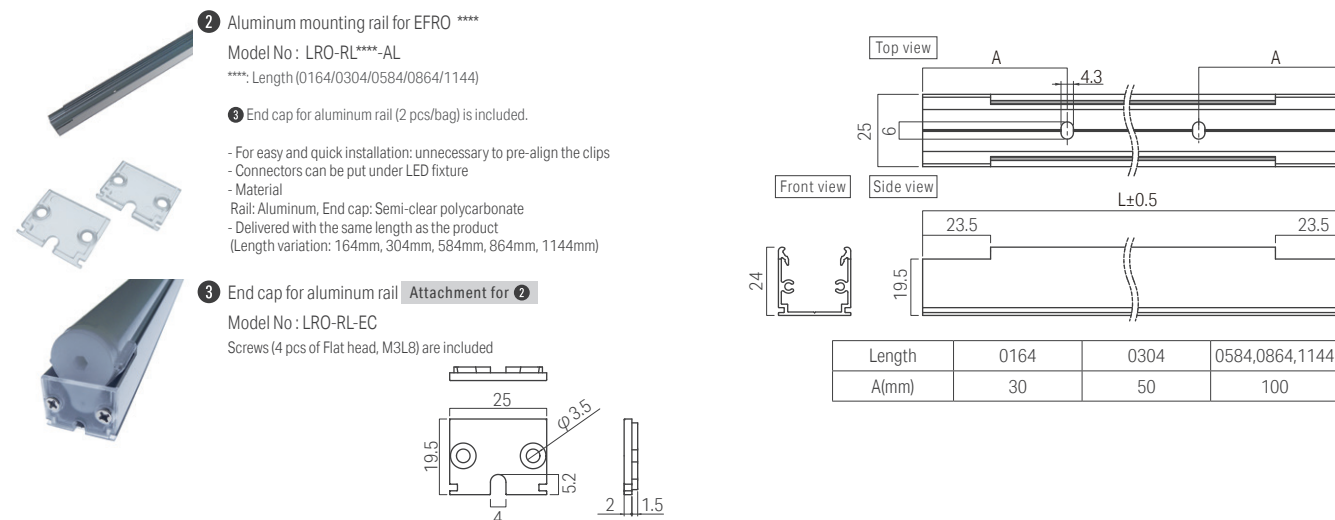


Cautions: Waterproofing process for terminal connector
The unclosed connector at the terminal of LED fixture must be sealed with connector cover for AH1 connector which is attached with power supply cable (CAD-VA5000-FJNN-O). Make sure to rotate the fastening part until no longer can rotate.

Installing the product

Straight installation

Installation with Mounting Clip

Attach Mounting clip for EFRO (LRO-PT-A) at below position with screws supplied by installer (Pan head screws M4 recommended), and insert the LED fixture with considering the direction of the connector of power supply cable side. See below picture for holding the cable and connector underneath the LED fixture. Downwards installation is available as well.

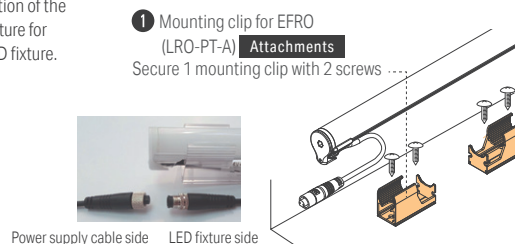


Recommended position of Monting clips

Power supply side of LED fixture

Between two LED fixtures

Terminal of LED fixture

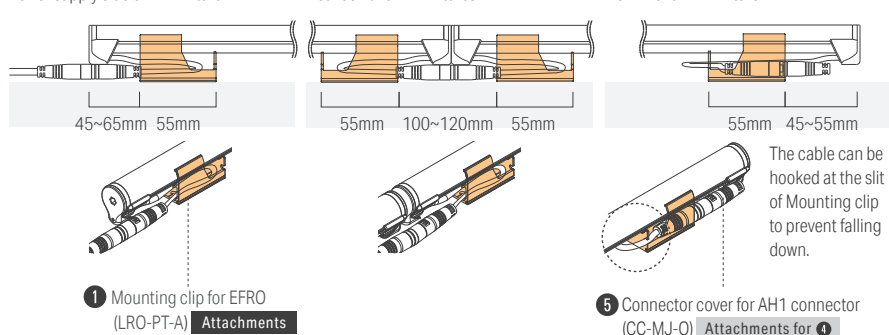


Vertical installation

Make sure the bottom of LED fixture hook on the edge of the Mounting clip in accordance with the diagram.

Caution: If the weight of the LED fixture is not supported by the edge of the Mounting clip, it may slide down and fall.

Terminal of LED fixture




Connector cover for AH1 connector can be stored in the Mounting clip. Connecting the power supply cable at the top of LED fixture.

Installation with Mounting Rail

1. Attach Aluminum mounting rail for EFRO (LRO-RL****-AL) at below position with screws supplied by installer (Pan head screws M4 recommended)
2. Insert the LED fixture with considering the direction of the connector of power supply cable side.
3. After passing the cable through the cable outlet of the end cap, fix the end cap to the rail by screws attached with the products.

Note: The order of installation can be changed by the situation of the site.

Note: Please fix with the same number of screws as the number of screw holes.

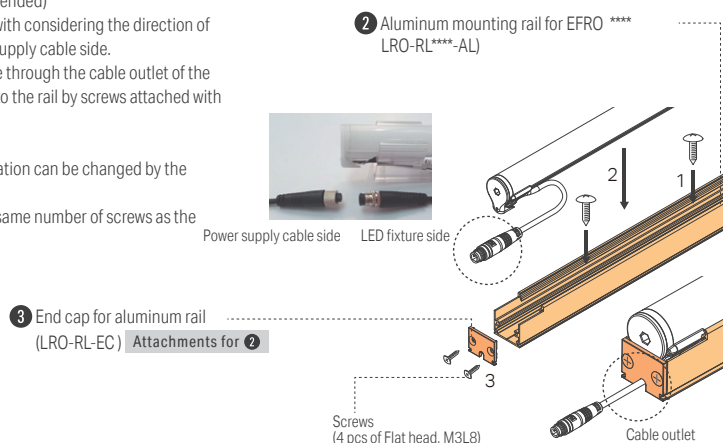

Make sure the bottom of LED fixture hook on the edge of the end cap for aluminum rail in accordance with the diagram.


Caution: If the weight of the LED fixture is not supported by the end cap for aluminum mounting rail, it may slide down and fall.

Position of connector


Power supply side of LED fixture
Below LED fixture

Between two LED fixture

Terminal of LED fixture
Below LED fixture

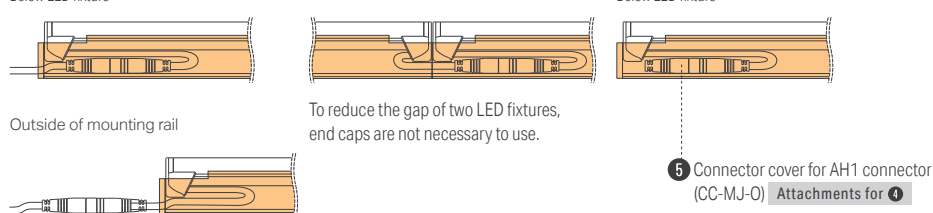


Terminal of LED fixture



Connector cover for AH1 connector can be stored in the Mounting rail. Connecting the power supply cable at the top of LED fixture.

System configuration diagram

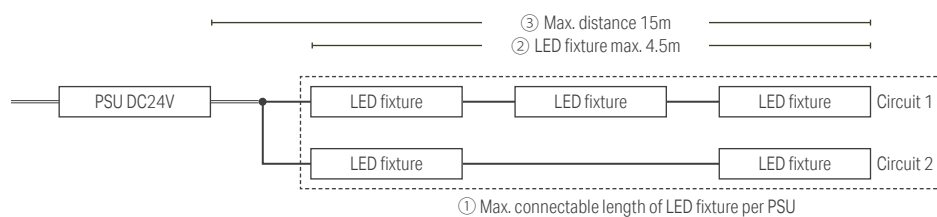

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Luci EFRO IP65

Illuminance data




ERO EFRO IP65

Color temperature
4000K 3500K 3000K 2700K 2400K

Direct horizontal surface light intensity distribution chart


LRO-1142-W-DF-IW

Light source color 4000K
Brightness 159 cd
Luminous flux 738 lm
Color rendering index Ra 94




LRO-1142-WW-DF-IW

Light source color 3500K
Brightness 151 cd
Luminous flux 712 lm
Color rendering index Ra 94




LRO-1142-L30-DF-IW

Light source color 3000K
Brightness 136 cd
Luminous flux 686 lm
Color rendering index Ra 93




LRO-1142-L27-DF-IW

Light source color 2700K
Brightness 138 cd
Luminous flux 659 lm
Color rendering index Ra 93









LRO-1142-L24-DF-IW

Light source color 2400K
Brightness 131 cd
Luminous flux 606 lm
Color rendering index Ra 93





Distance from wall





Recommend dimensions and illumination distributions



Cornice lighting-1 CH=2800

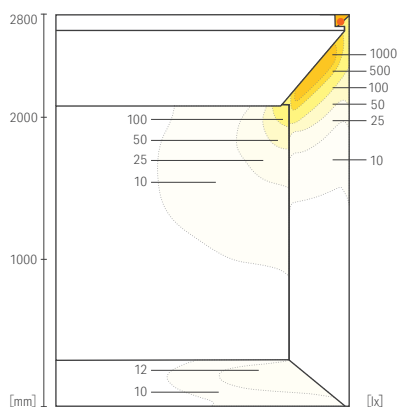



Cornice lighting-2 CH=2800

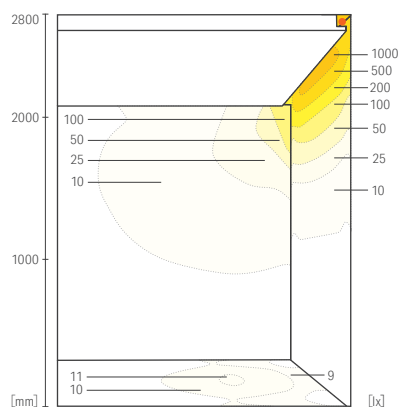



Cornice lighting-3 CH=2800

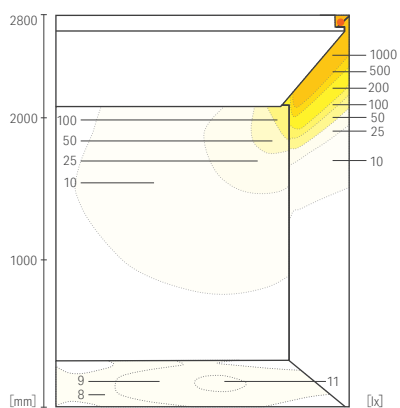

Cornice lighting-4 CH=2800

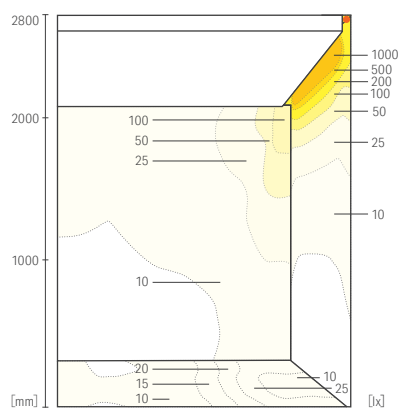


Cove lighting CH=2800

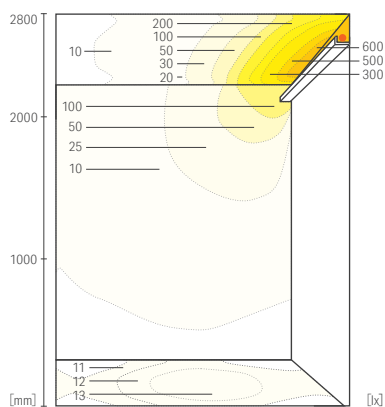

L-ELA9K2



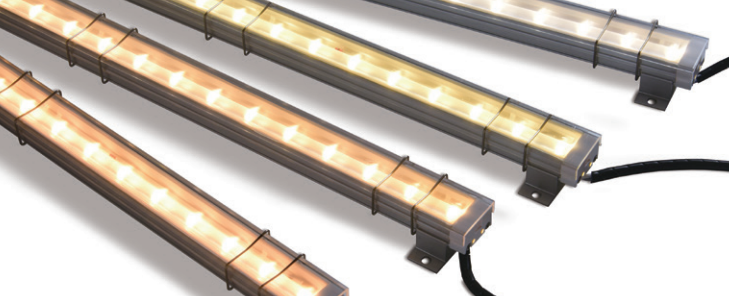

Power LEDs Line IP65

Small dimension light grazing effect for outdoor.
Unpleasant light scallops and spill, with special extrusion lens
User-friendly with constant voltage, high efficiency,
max. 9m per run connection

Specifications

Dimensions

Cross section W 35 x H 22 mm including clip
Standard length 12 types of fixed length with both/one side cable with IP67 connector

1445		1325							
1205		1085							
965		845		725					
605		485		365		245		125	

Color temperature

4000K	3500K	3000K	2700K
-------	-------	-------	-------

Electrical & Output

Power Consumption (W/m)	19.9
Luminous flux @ 3000K (lm/m)	1876
Efficacy (lm/W)	94.3

Optics




Features

Advanced waterproofing function design

IP67 connector


Line part : Encapsulated by silicon between aluminum heatsink and extrusion lens
End part : Encapsulated by silicon around cable, end cap and silicon bush for cable








Heatproof fluororesin cable covered with weather resistance cover

Polycarbonate protection cover covered by steel wire

Lifted mounting clip for preventing invasion of rain water



Distance from wall




Application sample

Facade



Bathroom

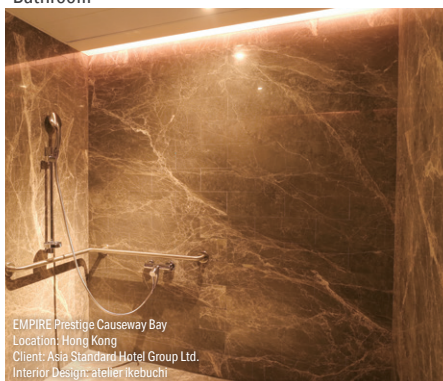

Discontinued

Power LEDs Line IP65

L-ELA9K2




Color management

CIE

- Narrow beam angle with extrusion lens 35° x 120°
- 12 kinds of length variation
- Max. connectable length: 9m

Model No.				
L - ELA9K2 - <div></div> <div></div> <div></div> N - 24C - P				
Product Name	Length	Lead wire	Light source color	Beam angle
L-ELA9K2	012 084 024 096 036 108 048 120 060 132 072 144	J : Both ends lead wire E : One end lead wire	40 : 4000K 35 : 3500K 30 : 3000K 27 : 2700K	N : 35° x 120°



Specification

Length	048		096		144	
Model No.	Both ends lead wire	L-ELA9K2-048J□N-24C-P	L-ELA9K2-096J□N-24C-P		L-ELA9K2-144J□N-24C-P	
	One end lead wire	L-ELA9K2-048E□N-24C-P	L-ELA9K2-096E□N-24C-P		L-ELA9K2-144E□N-24C-P	
Power consumption	9.6W/485mm		19.2W/965mm		28.8W/1445mm	
Fitting length (L)	485mm		965mm		1445mm	
Weight	190g(J) / 178g(E)		360g(J) / 341g(E)		530g(J) / 504g(E)	
Luminaire efficacy (2700K)	91.6 lm/W		91.6 lm/W		91.9 lm/W	
Light source color ○ = Device inventory * = Equivalent						
40 4000K Ra83	○	910 lm	○	1820 lm	○	2740 lm
35 3500K Ra83	○	910 lm	○	1820 lm	○	2740 lm
30 3000K Ra83	○	910 lm	○	1810 lm	○	2720 lm
27 2700K Ra83	○	880 lm	○	1760 lm	○	2640 lm

Contact us about 5000K since they are made-to-order and have a Minimum Order Quantity.

Size Variation

Length	012	024	036	060	072	084	108	120	132
Power consumption	2.4W	4.8W	7.2W	12.0W	14.4W	16.8W	21.6W	24.0W	26.4W
Lamp fitting length (L)	125mm	245mm	365mm	605mm	725mm	845mm	1085mm	1205mm	1325mm


Spec may be subject to change without announcement.

The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input voltage	DC24V
Environment	In & Outdoors (no condensation) IP65
Max. sets connectable	9m
Ambient temperature / humidity	-5~40°C, 25~95%RH (no condensation)
Storage temperature / humidity	-15~55°C, 25~85%RH (no condensation)
Material (body)	Aluminium, Polycarbonate
Attachments	-
Option parts	① Power supply cable ② Joint cable
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required
COO	Japan

External dimensions

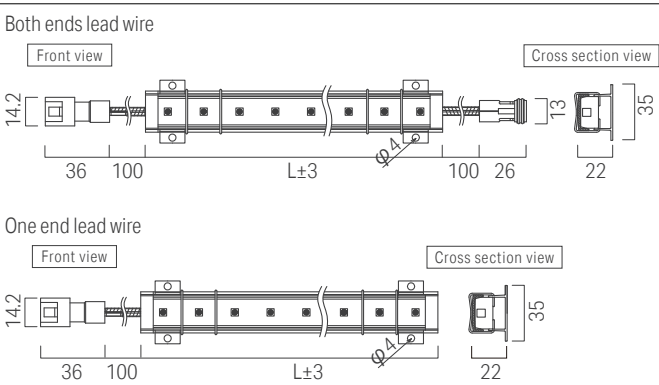


Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~1.7m	50W power supply
~3.5m	100W power supply
~5.2m	150W power supply


Prohibited installation places:

- direct expose to water / pooling of water
- direct sunlight
- liquids including choline or chemicals
- high temperature and high humidity such as saunas and public bath
- coastal areas which are affected by sea spray



Caution
Do not cut the LED fixture and the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Cross sectional view

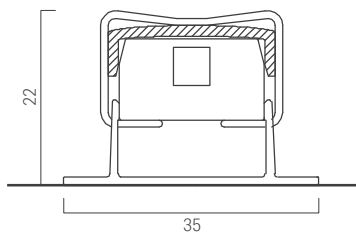


Option parts

① Power supply cable EPYC *mm **Required**


*(Length:mm)	500	1000	2000	4000
Model No.	EPYC220-805-K	EPYC220-810-K	EPYC220-820-K	EPYC220-840-K

Required 1 pc per circuit for connecting the LED fixture to power supply or dimmer driver.
Terminal connector 1pc is attached with Power supply cable.
Please make sure to use it when not connecting both side lead wire type of LED fixture to the next LED fixture.

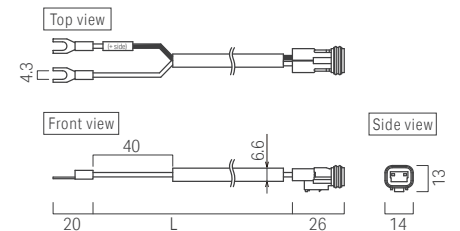

② Joint cable EECC *mm



*(Length:mm)	500	1000	2000	4000	6000
Model No.	EECC220-805	EECC220-810	EECC220-820	EECC220-840	EECC220-860

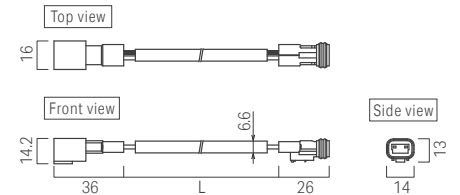

Power LEDs Line IP65

Installing the product

Clip installation

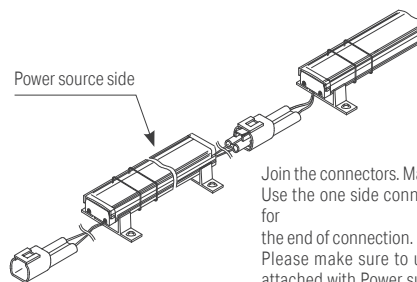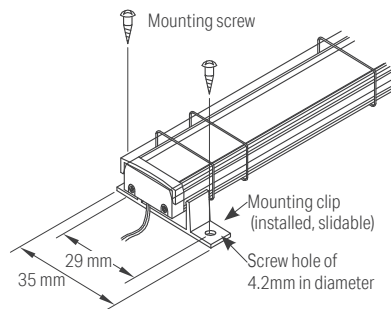

Join the connectors. Make sure that they are correctly joined. Use the one side connector product (L-ELA9K2-*E**-24C-P) for the end of connection. Please make sure to use the terminal connector which is attached with Power supply cable EPYC220-8**-K, when not connecting both side lead wire type of LED fixture to the next LED fixture.

⚠ Cautions

Not suitable to be fixed with a double-sided tape or adhesive.

⚠ Cautions


Do not cut off the connectors to use them. The waterproof performance will be lost. In order to avoid the exposure to direct sunlight, hide the connectors behind the lamp, etc.

⚠ Cautions


- ¥ Make sure that the installation site is flat.
- ¥ Before the construction, make sure to remove from the installation site any oil content, water drop, dust and so on.
- ¥ When installing the product downward or in a vertical direction, pay full attention in order to avoid dislocation, damage due to a fall and so on.
- ¥ Do not scratch or incise the lead wire. The waterproof performance will be lost.
- ¥ Make sure to insert the connector until it is completely locked. Otherwise it can lead to the lowering of the waterproof performance and contact failure.
- ¥ Do not remove the spring for fixing the protective cover. Even on the LED, shading of the light is hardly caused.

Minimum size for construction

Please keep the following size in order to avoid the temperature increase of the lamp. Any size that is smaller than the following may shorten the lamp's life.

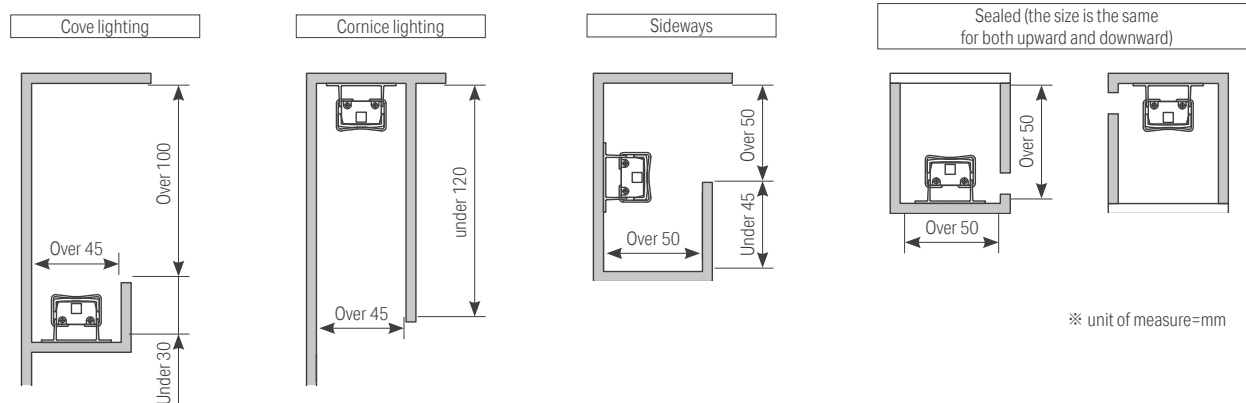

System configuration diagram

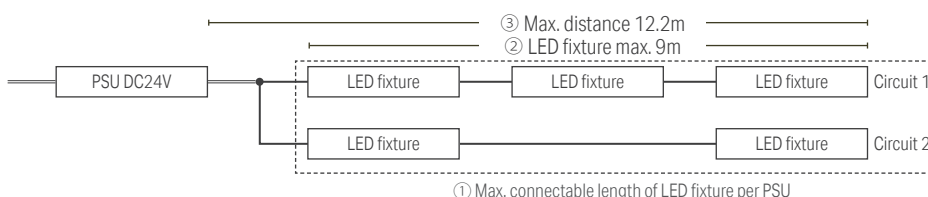

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Illuminance data



L-ELA9K2

Power LEDs Line IP65


Color temperature

4000K 3500K 3000K 2700K

Direct horizontal surface light intensity distribution chart


L-ELA9K2-096J(E)40N-24C-P

Light source color 4000K
 Brightness 1612 cd
 Luminous flux 2000 lm
 Color rendering index Ra 83




L-ELA9K2-096J(E)35N-24C-P

Light source color 3500K
 Brightness 1612 cd
 Luminous flux 2000 lm
 Color rendering index Ra 83




L-ELA9K2-096J(E)30N-24C-P

Light source color 3000K
 Brightness 1612 cd
 Luminous flux 2000 lm
 Color rendering index Ra 83



L-ELA9K2-096J(E)27N-24C-P

Light source color 2700K
 Brightness 1612 cd
 Luminous flux 2000 lm
 Color rendering index Ra 83



L-ELS7K1



SPACES Sun House
Hong Kong
Client: Spaces.
Architect office: Shadow Design



LEDs Bar IP65

3 side light emission homogeneous rigid bar.
The low wattage of 7.7 w/m, 780lm/m and high efficiency of 101.3 lm/m
Ideal for concealed lighting
in small installation space at facade and landscape

Specifications

Dimensions

Cross section W 35 x H 22 mm including clip
Standard length 12 types of fixed length with both/one side cable with IP67 connector

1445	1325			
1205	1085			
965	845	725		
605	485	365	245	125

Color temperature

4000K	3500K	3000K	2700K
-------	-------	-------	-------


Electrical & Output

Power Consumption (W/m)	7.9
Luminous flux @ 3000K (lm/m)	804
Efficacy (lm/W)	102.6

Features

Advanced waterproofing function design

IP67 connector (Japanese brand)
Heatproof fluororesin cable covered with weather resistance
Cylindrical extruded polycarbonate diffused cover. Encapsulated by silicon around cable and Polycarbonate end cap.




Smooth light by dotless, three-sided emission

The LEDs bar is ideal for under the bench/steps in landscape. In particular, it is recommended when the surface to be irradiated is a glossy material. You don't need to make any fascia to ease the dots, and you don't need to worry about the poor lighting effects caused by LED strips dropping from the aluminium profile.








Strip light

Dot-free type

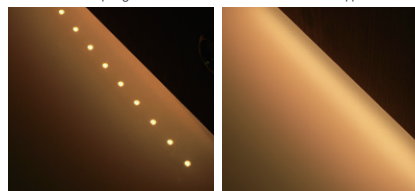


Distance from wall




Application sample


Indirect light for outdoor

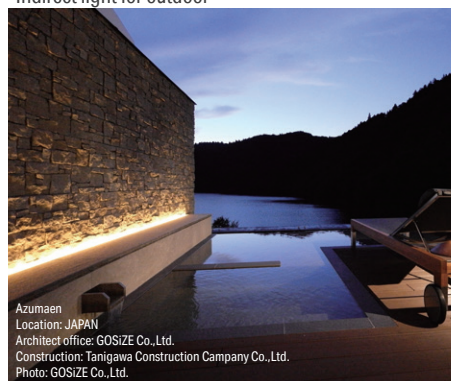

Recessed light

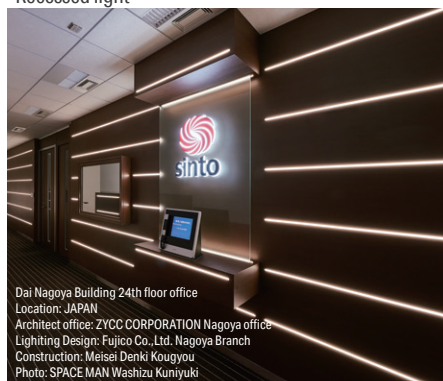

Landscape

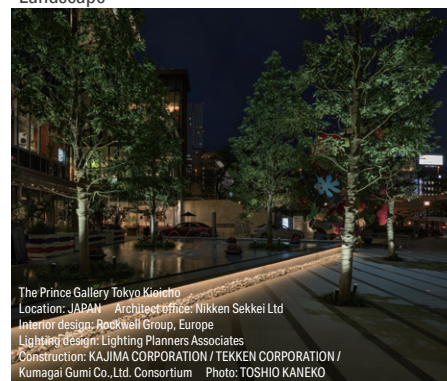

Discontinued

LEDs Bar IP65

L-ELS7K1



Color management
MacAdam 3 step


- Homogeneous linear light with 3 side surface-emission
- High-efficiency lighting; >100 lm/W
- Small section size 13.2 x 13.6 mm

Model No.

L - ELS7K1 - - 24C

Product Name	Length	Lead wire	Light source color
L-ELS7K1	<div>014026038050062074</div> <div>086098110122134146</div>	<div>J : Both ends lead wire</div> <div>E : One end lead wire</div>	<div>40 : 4000K</div> <div>35 : 3500K</div> <div>30 : 3000K</div> <div>27 : 2700K</div>

Light Intensity Refer to P.233



Specification

Length		050	098	144
Model No.	Both ends lead wire	L-ELS7K1-050J <div></div> -24C-P	L-ELS7K1-098J <div></div> -24C-P	L-ELS7K1-144J <div></div> -24C-P
	One end lead wire	L-ELS7K1-050E <div></div> -24C-P	L-ELS7K1-098E <div></div> -24C-P	L-ELS7K1-144E <div></div> -24C-P
Power consumption		3.9W/503mm	7.7W/983mm	11.6W/1463mm
Fitting length (L)		503mm	983mm	1463mm
Weight		55g(J) / 53g(E)	95g(J) / 93g(E)	135g(J) / 133g(E)
Luminaire efficacy (2700K)		100.0 lm/W	101.3 lm/W	100.0 lm/W
Light source color		○ = Device inventory * = Equivalent		
40 4000K	Ra82	○ 430 lm	○ 850 lm	○ 1280 lm
35 3500K	Ra82	○ 400 lm	○ 810 lm	○ 1210 lm
30 3000K	Ra82	○ 400 lm	○ 790 lm	○ 1190 lm
27 2700K	Ra82	○ 390 lm	○ 780 lm	○ 1160 lm

Contact us about 5000K since they are made-to-order and have a Minimum Order Quantity.

Size Variation

Length	014	026	038	062	074	086	110	122	134
Power consumption	1.0W	2.0W	2.9W	4.8W	5.8W	6.8W	8.7W	9.6W	10.6W
Lamp fitting length (L)	143mm	263mm	383mm	623mm	743mm	863mm	1103mm	1223mm	1343mm


Spec may be subject to change without announcement.

The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification


Input voltage	DC24V
Environment	In & Outdoors (no condensation) IP65
Max. sets connectable	9m
Ambient temperature / humidity	-5~40℃, 25~95%RH (no condensation)
Storage temperature / humidity	-15~55℃, 25~85%RH (no condensation)
Material (body)	Polycarbonate
Attachments	Mounting clip
Option parts	① Mounting clip ② Power supply cable ③ Joint cable
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required
COO	Japan

External dimensions

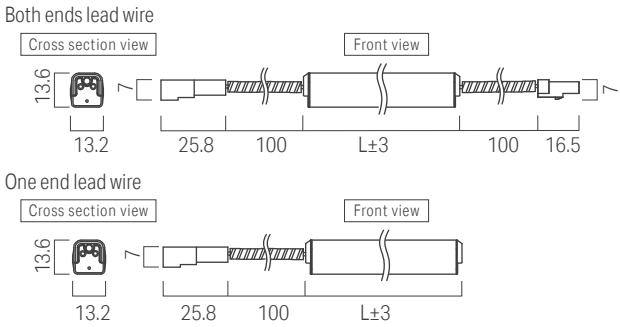

Prohibited installation places:


- direct expose to water / pooling of water
- liquids including choline or chemicals
- high temperature and high humidity such as saunas and public bath
- coastal areas which are affected by sea spray



Caution:

Do not cut the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Cross sectional view

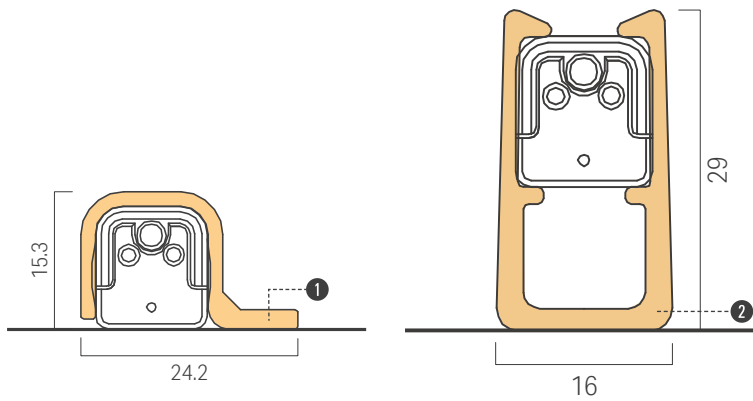


Option parts

1 Mounting clip for LEDs Bar IP65 **Attachment**

Model No : ELS7K-FS

Attached with LED fixture
 2 pcs for 143mm to 383mm
 3 pcs for 503mm to 863mm
 5 pcs for 983mm to 1463mm

For extra order, 2 pcs / bag




2 Lift clip for LEDs Bar IP65


Model No : ELS7K-FH

2 pcs / bag

Recommended number
 2 pcs for 143mm to 383mm
 3 pcs for 503mm to 863mm
 5 pcs for 983mm to 1463mm

3 Power supply cable EPYJ *mm **Required**

*(Length:mm)	500	1000	2000	4000
Model No.	EPYJ220-305-K	EPYJ220-310-K	EPYJ220-320-K	EPYJ220-340-K

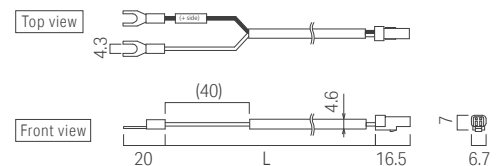


⚠ Check the label on the DC + side for polarity.



4 Joint cable EEJJ *mm


*(Length:mm)	500	1000	2000	4000	6000
Model No.	EEJJ220-305	EEJJ220-310	EEJJ220-320	EEJJ220-340	EEJJ220-360

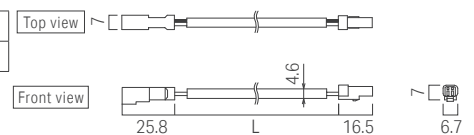


LEDs Bar IP65

Installing the product


Clip installation

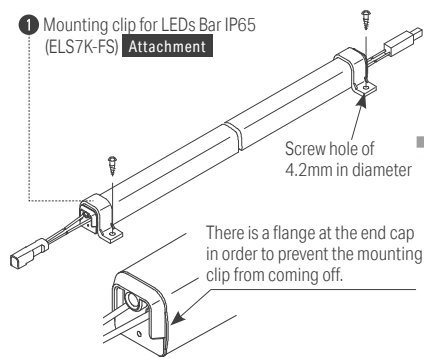

Fix the lamp on the installation site with the attached Mounting clips and screws (round head screw M3.1 x 16).

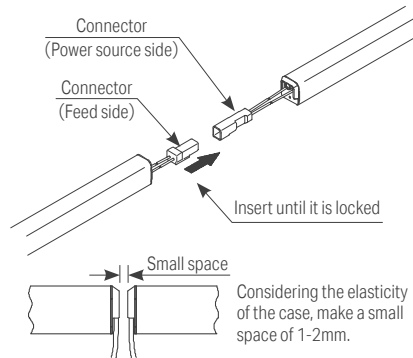

Join the connectors. Make sure that they are correctly joined. Use the one side connector product (L-ELS7K1-xxxE*-24) for the end of connection.

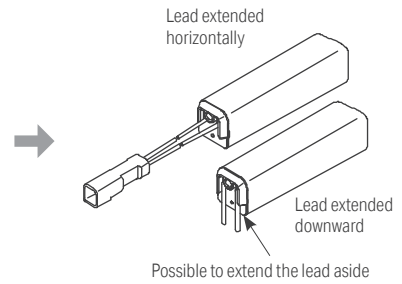

Place the lead towards the direction according to each usage.

⚠ Cautions

Not suitable to be fixed with a double-sided tape or adhesive.

⚠ Cautions

Do not cut off the connectors to use them. The waterproof performance will be lost.

⚠ Cautions

In order to avoid the exposure to direct sunlight, hide the connectors behind the lamp, etc.


⚠ Cautions

- Make sure that the installation site is flat.
- Before the construction, make sure to remove from the installation site any oil content, water drop, dust and so on.
- When installing the product downward or in a vertical direction, pay full attention in order to avoid dislocation, damage due to a fall and so on.
- Do not scratch or incise the lead wire. The waterproof performance will be lost.
- Make sure to insert the connector until it is completely locked. Otherwise it can lead to the lowering of the waterproof performance and contact failure.


Minimum size for construction

Please keep the following size in order to avoid the temperature increase of the lamp. Any size that is smaller than the following may shorten the lamp's life.


① Mounting clip for LEDs Bar IP65

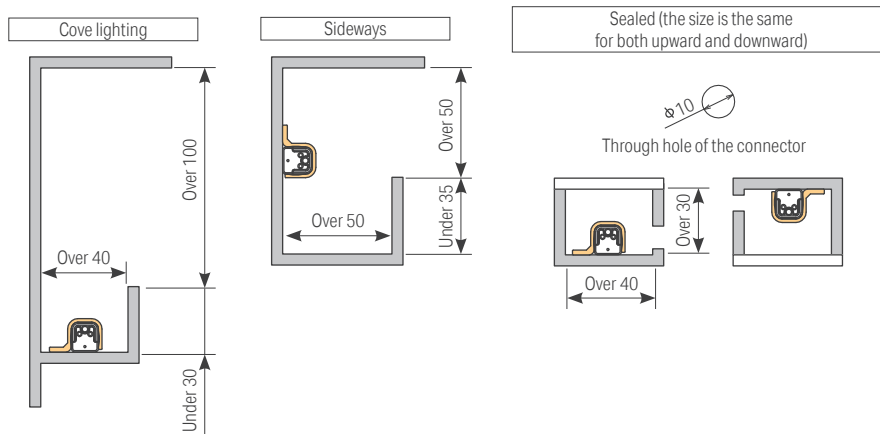

② Lift clip for LEDs Bar IP65



System configuration diagram

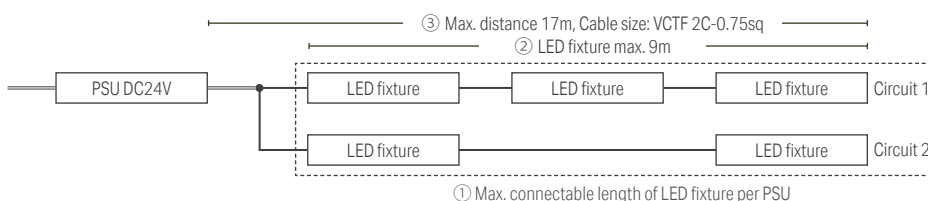

- ① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)
- ② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.
- ③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Illuminance data



L-ELS7K1

LEDs Bar IP65


Color temperature

4000K 3500K 3000K 2700K

Direct horizontal surface light intensity distribution chart


L-ELS7K1-098J(E)40-24

Light source color 4200K
 Brightness 131 cd
 Luminous flux 850 lm
 Color rendering index Ra 82




L-ELS7K1-098J(E)35-24

Light source color 3500K
 Brightness 125 cd
 Luminous flux 810 lm
 Color rendering index Ra 82




L-ELS7K1-098J(E)30-24

Light source color 3000K
 Brightness 122 cd
 Luminous flux 790 lm
 Color rendering index Ra 82



L-ELS7K1-098J(E)27-24

Light source color 2700K
 Brightness 120 cd
 Luminous flux 780 lm
 Color rendering index Ra 82



L-ELR9K2



Sapporo PARCO
Location: JAPAN

LEDs Line IP67

Low wattage 7.8W/m, 1000 lm/m,
high efficiency 127 lm/m semi-diffused linear
Ideal for exposed or concealed lighting
for façade and landscape application

Specifications

Dimensions

Cross section W 34 x H 13.6 mm including clip
Standard length 12 types of fixed length with both/one side cable with IP67 connector

1460	1340			
1220	1100			
980	860	740		
620	500	380	260	140

Color temperature

4000K	3500K	3000K	2700K
-------	-------	-------	-------

Electrical & Output


Power Consumption (W/m)	7.8
Luminous flux @ 3000K (lm/m)	1000
Efficacy (lm/W)	127.3

Features

Advanced waterproofing function design

IP67 connector (Japanese brand)

Heatproof fluororesin cable covered with
weather resistance









Cylindrical extruded polycarbonate semi-
diffused cover


Three step protection structure

- Double polycarbonate end cap
- Encapsulated by silicon around cable and polycarbonate end cap
- Silicon O ring for cable

Comparison of the distance from wall



Application sample

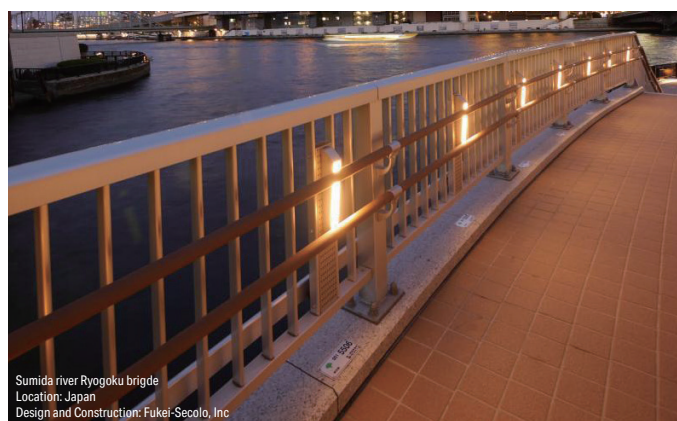

Sumida river Ryogoku bridge
Location: Japan
Design and Construction: Fukui-Secolo, Inc




Pacific Royal Court Minato Mirai
Location: JAPAN

Discontinued

LEDs Line IP67

L-ELR9K2

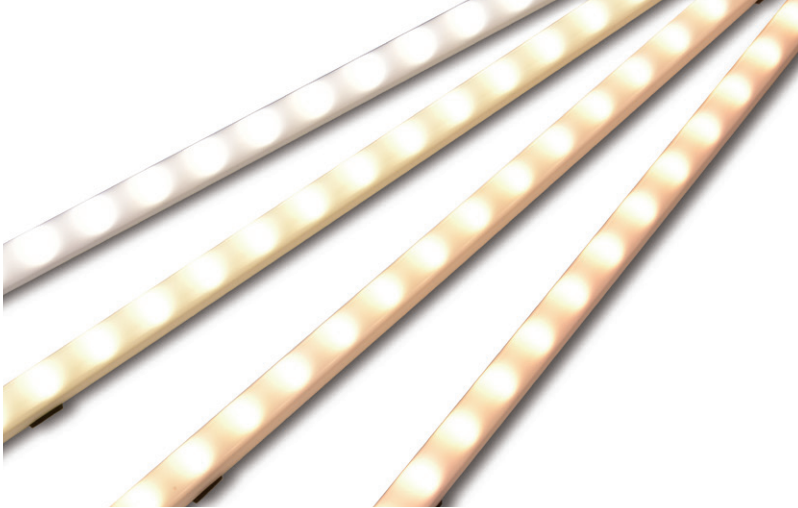


Color management
CIE

- IP67 linear light with semi diffused cover
- High-efficiency lighting; >100 lm/W
- Small section size 14.6 x 13.8 mm

Model No.

L - ELR9K2 - M - 24

Product Name	Length	Lead wire	Light source color
L-ELR9K2	<div>014086</div> <div>026098</div> <div>038110</div> <div>050122</div> <div>062134</div> <div>074146</div>	<div>J : Both ends lead wire</div> <div>E : One end lead wire</div>	<div>40 : 4000K</div> <div>35 : 3500K</div> <div>30 : 3000K</div> <div>27 : 2700K</div>



Specification

Length	050		098		146	
Model No.	Both ends lead wire		L-ELR9K2-050J□M-24		L-ELR9K2-146J□M-24	
	One end lead wire		L-ELR9K2-050E□M-24		L-ELR9K2-146E□M-24	
Power consumption	3.9W/500mm		7.7W/980mm		11.6W/1460mm	
Fitting length (L)	500mm		980mm		1460mm	
Weight	48g(J) / 47g(E)		82g(J) / 81g(E)		134g(J) / 133g(E)	
Luminaire efficacy (2700K)	117.9 lm/W		121.5 lm/W		120 lm/W	
Light source color ○ = Device inventory ★ = Equivalent						
40 4000K Ra83	○ 480 lm		○ 960 lm		○ 1440 lm	
35 3500K Ra83	○ 480 lm		○ 960 lm		○ 1440 lm	
30 3000K Ra83	○ 480 lm		○ 960 lm		○ 1440 lm	
27 2700K Ra83	○ 460 lm		○ 930 lm		○ 1390 lm	

Contact us about 5000K since they are made-to-order and have a Minimum Order Quantity.

Size Variation

Length	014	026	038	062	074	086	110	122	134
Power consumption	1.0W	2.0W	2.9W	4.8W	5.8W	6.8W	8.7W	9.6W	10.6W
Lamp fitting length (L)	140mm	260mm	380mm	620mm	740mm	860mm	1100mm	1220mm	1340mm

Spec may be subject to change without announcement.

The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.


General Specification

Input voltage	DC24V
Environment	In & Outdoors (no condensation) IP65
Max. sets connectable	9m
Ambient temperature / humidity	-5~50℃, 25~95%RH (no condensation)
Storage temperature / humidity	-25~55℃, 25~85%RH (no condensation)
Material (body)	Polycarbonate
Attachments	Clip
Option parts	① Clip ② Power supply cable ③ Joint cable
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required
COO	Japan

Max. connectable length per power supply


Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
~4.4m	50W power supply
~8.8m*	100W power supply
~13.2m*	150W power supply

External dimensions

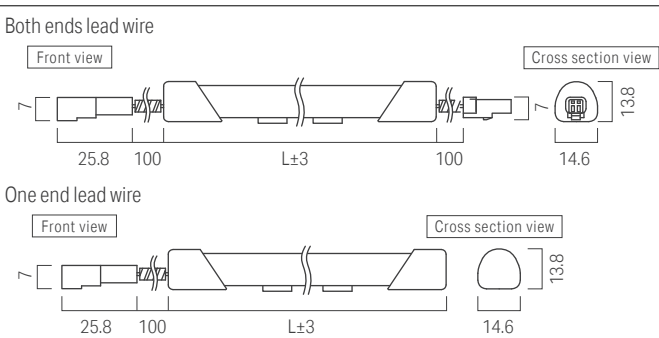

Prohibited installation places:


- direct expose to water / pooling of water
- liquids including choline or chemicals
- high temperature and high humidity such as saunas and public bath
- coastal areas which are affected by sea spray



Caution:

Do not cut the lead wire of outdoor product at a job site.
Please do appropriate treatment for the lead wire and connector of the terminal of outdoor LED fixture.

Cross sectional view

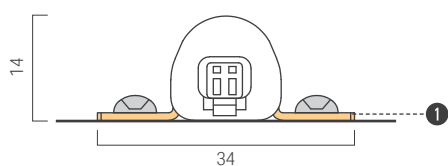

Option parts




① SUS Mounting clip for LEDs Line IP67 Attachment

Model No : ELR9K-FS-MA
2 pcs / bag


Recommended number
2 pcs for 140mm to 380mm
3 pcs for 500mm to 860mm
5 pcs for 980mm to 1460mm

For extra order, 2 pcs/bag

Top view




Side view




② Power supply cable EPYJ *mm Required

*(Length:mm)	500	1000	2000	4000
Model No.	EPYJ220-305-K	EPYJ220-310-K	EPYJ220-320-K	EPYJ220-340-K

Top view



Front view




⚠ Check the label on the DC + side for polarity.




③ Joint cable EEJJ *mm

*(Length:mm)	500	1000	2000	4000	6000
Model No.	EEJJ220-305	EEJJ220-310	EEJJ220-320	EEJJ220-340	EEJJ220-360

Top view




Front view



LEDs Line IP67

Installing the product

Clip installation

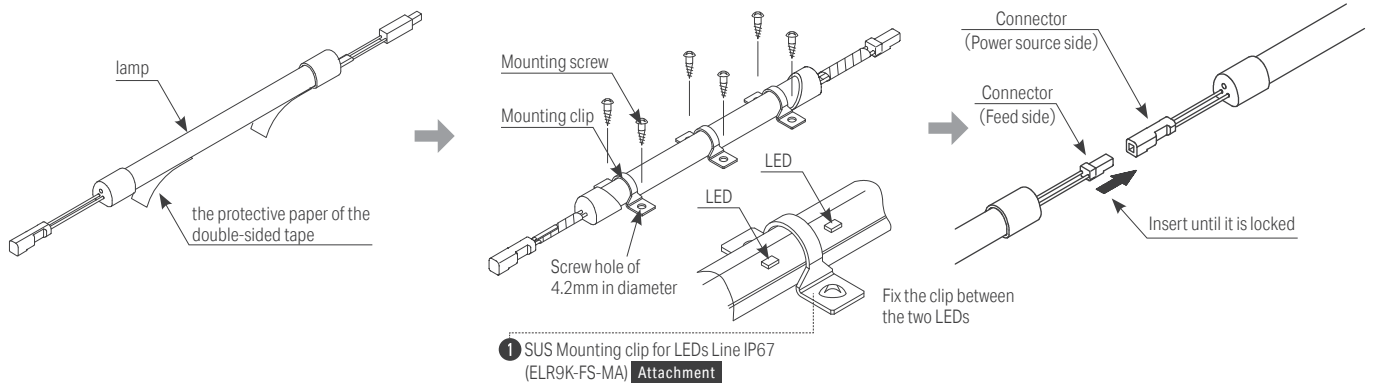

Remove the protective paper of the double-sided tape and temporarily fix the lamp to the installation site.

Fix the lamp on the installation site with the attached Mounting clips and screws (round head screw M3.1 x 16).

Join the connectors. Make sure that they are correctly joined. Use the one side connector product (L-ELR*K2-xxxE*M-24) for the end of connection.

⚠ Cautions

Not suitable to be fixed with a double-sided tape or adhesive.

⚠ Cautions


Do not cut off the connectors to use them. The waterproof performance will be lost. In order to avoid the exposure to direct sunlight, hide the connectors behind the lamp, etc.

⚠ Cautions


- Make sure that the installation site is flat.
- Before the construction, make sure to remove from the installation site any oil content, water drop, dust and so on.
- When installing the product downward or in a vertical direction, pay full attention in order to avoid dislocation, damage due to a fall and so on.
- Do not scratch or incise the lead wire. The waterproof performance will be lost.
- Make sure to insert the connector until it is completely locked. Otherwise it can lead to the lowering of the waterproof performance and contact failure.

Minimum size for construction

Please keep the following size in order to avoid the temperature increase of the lamp.
Any size that is smaller than the following may shorten the lamp's life.

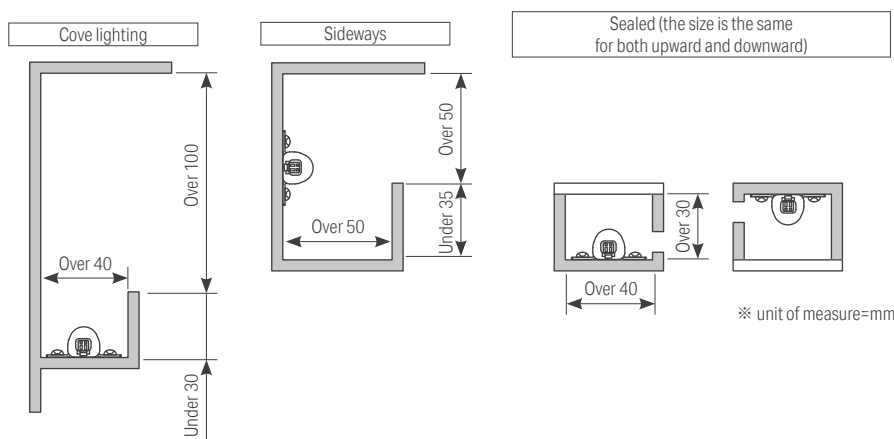

System configuration diagram

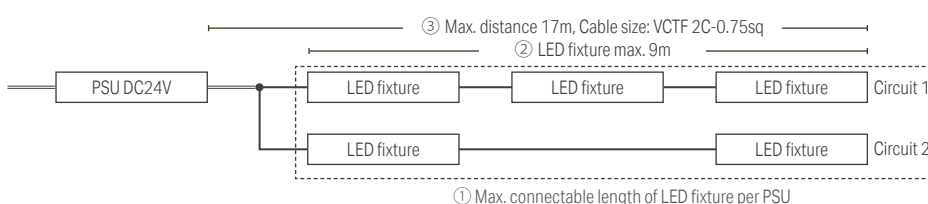

① Max. connectable total length of LED fixture per power supply depends on capacity of power supply. Recommended loading factor: 70% (without dimming) or 60% (with dimming)

② If connectable length of LED fixture per circuit exceeds the maximum, please split into multiple circuit.

③ To avoid voltage drop, please consider the max. distance from power supply to the end of LED fixture. (i.e. total cable length plus LED fixture length)

Illuminance data



ELR9K2

LEDs Line IP67


Color temperature

4000K 3500K 3000K 2700K

Direct horizontal surface light intensity distribution chart


L-ELR9K2-098J(E)40M-24

Light source color 4000K
 Brightness 321 cd
 Luminous flux 960 lm
 Color rendering index Ra 83




L-ELR9K2-098J(E)35M-24

Light source color 3500K
 Brightness 321 cd
 Luminous flux 960 lm
 Color rendering index Ra 83




L-ELR9K2-098J(E)30M-24

Light source color 3000K
 Brightness 321 cd
 Luminous flux 960 lm
 Color rendering index Ra 83



L-ELR9K2-098J(E)27M-24

Light source color 2700K
 Brightness 311 cd
 Luminous flux 930 lm
 Color rendering index Ra 83



Dimmer

Dimmable driver list

Product to be dimmed	Number of channel	Dimmable Driver						Compatible Dimmer Controller
		Driver type	Input	Dimming signal type	IP rated	Model Number	Page	
DC24V single color series	1ch	CV	DC	DMX	-	PX0408	P.241	-
				DALI	-	DALI6010	P.241	-
				0-10V/1-10V	-	DIM-S1L10V-0	P.242	Walldim 103E1
			AC	0-10V	IP67	PWM-120-24	P.243	-
DC24V Dynamic white series	2ch	C.C	DC	0-10V/1-10V	-	DIM-S2L8V-0	P.244	Walldim 22
Vivoxy Graze	1ch		AC	0-10V	IP67	HVGC-**-B	P.245	-
VIVOXY Graze THOF	2ch		AC	0-10V	IP67	HVGC-**-B	P.245	-

Connectable length per dimmerble driver

			PX0408 (8A x 4ch) - use 1ch only DALI6010 (10A x 1ch) DIM-S1L10V-0 (10A x 1ch)		PWM-120-24	
			*connectable up to 3.75A, when using 150W DC24V PSU as 60% load factor		*connect up to 108W as 90% load	
Model No.	Output (W/m)	Max. length per circuit (m)	Connectable length per one driver (m)	W (VA)	Connectable length per one driver (m)	W (VA)
LFU or LFUA -T1000WS-*-DF-I/O-15	15.8	10	5.6	88.5	6.8	107.4
LFU or LFUA -T1000WS-*-DF-I/O-12	12.6	10	7.5	90	9	108
LFU or LFUA -T1000WS-*-DF-I/O-8	8.4	10	11.2	89.6	13.5*	108
LFPEX15-T1000W-*-CL-I/O	18.2	5.0 m (I), 3.5 m(O)	4.9	89.2	5.9*	107.4
LFPEX20-T1000W-*-CL-I/O	12.1	5	7.4	89.5	8.9*	107.7
LFPEX30-T1000W-*-CL-I/O-9	9.5	5	9.4*	89.3	11.3*	107.4
LFPEX30-T1000W-*-CL-I/O-6	6.5	5	13.8*	89.7	16.6*	107.9
LFPEX30-T1000W-*-CL-I/O-4	4.5	5	20*	90	24*	108
LFPEX30-T1000W-*-CL-I/O-3	4.5	5	20*	90	24*	108
LFPSC20-1000-*-CL-I	14.2	5	6.3*	89.5	7.6*	108
LFP15-T0900W-*-CL-I/O	15.4	4.5	5.8*	89.3	7*	107.8
LFP20-T1000W-*-CL-I/O	10.5	5	8.5*	89.3	10.2*	107.1
LFTF10 or LFTXF10-T1000W-*-CL-I/O	3.9	5	23*	89.7	27.6*	107.6
LFPA20-0960-*-CL-I	10.4	5	8.6*	89.4	10.3*	107.1
LRE-1003-*-DF-I	31.2	3.3	2.8	87.4	3.4*	106.1
LCEL or LCEF-0880-*-DF-I	20.6	5	4.3	88.6	5.2*	107.1
LSWK or LSXK-1008-*-DF-I-13	13.1	6	6.8	89.1	8.2*	107.4
LSWK or LSXK-1008-*-DF-I-8	8.1	6	11.1*	89.9	13.3*	107.7
LSWK or LSXK-1008-*-DF-I-4	4.3	6	20.9*	89.9	25.1*	107.9
LNL-0980-*-DF-I	7.2	5	12.5*	90	15*	108
LVF40-1000W-*-*-O-24-*	24	5	3.75	90	4.5	108
LVF40-1000W-*-*-O-16-*	16	5	5.6*	89.6	6.75*	108
LFUS-T1000WS-L27-DF-O	5.1	5	17.6*	89.8	21.1*	107.6
LRO-1142-*-DF-IW	8.4	4.5	10.7*	89.9	12.8*	107.5
L-ELA9K2-096***-24C-P	19.2	9	4.6	88.3	5.6*	107.5
L-ELS7K1-098***-24	7.7	9	11.6*	89.3	14*	107.8
L-ELR9K2-098***-M-24	7.7	9	11.6*	89.3	14*	107.8

*Split into multiple circuit

Dimmer & Power supply

For DC24V single color series

PX0408

Constant Voltage - Dimmable driver (DC input) - 4ch

DMX Driver 8A x 4ch Dimmable driver (DC input) EUCHIPS

EUCHIPS




Specification

Product name	DMX Driver 8A*4ch
Model number	PX0408
Input voltage	12V - 24V
Output channel	4ch * 8A
Size	140*50*26 (mm)
Weight	240 g
Usage enviroment	Indoor(no condensation)
Oparring enviroment temprature	-20°C ~ 50°C

- Meets DMX512/1990,RDM /2009 protocol
- Constant voltage output, the maximum current of 8A /ch for RGBW decoder
- 256 grade brightness adjustment
- Short-circuit protection, overload protection, over-temperature protection
- In DMX mode set the DMX address manually by switch;
- in RDM mode, the host computer address allocation

Wiring Diagram

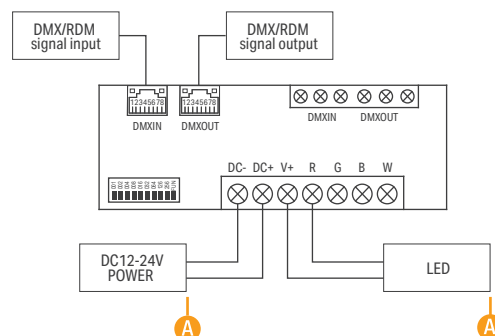

Maximum wiring distance from 'A-A'' depends on LED fixture. Please refer to manuals of each product. Please check the maximum of connectable LED length in one series referring to the catalog page of each product. When the LED total length exceeds the maximum length in series, please connect by separating into several circuit. Twist shield cable is recommended to use as a signal cable.

For DC24V single color series

DALI6010

Constant Voltage - Dimmable driver (DC input) - 1ch

DALI Driver 10A x 1ch

EUCHIPS




Specification

Product name	DALI Driver 10A*1ch
Model number	DALI6010
Input voltage	12V - 24V
Output channel	1ch 10A
Size	168*39*30(mm)
Weight	124g
Usage enviroment	Indoor(no condensation)
Oparring enviroment temprature	-20°C ~ 50°C

- Single channel constant voltage output, 10A
- Meet DALI protocol IEC 62386
- Dimming range from 0.1-100%
- PWM digital dimming, no alter LED color rendering index
- Suitable for indoor LED lighting application
- Protections: Short circuit, over load, over temperature

Wiring Diagram

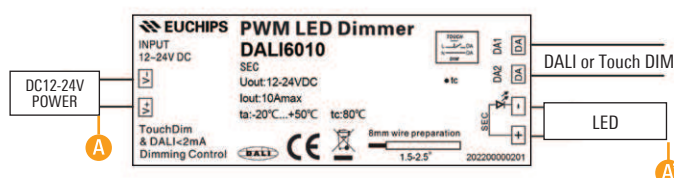

Maximum wiring distance from 'A - A'' is 10m/20m. Please refer to manuals of each product. Please check the maximum of connectable LED length in one series referring to the catalog page of each product. When the LED total length exceeds the maximum length in series, please connect by separating into several circuit. Twist shield cable is recommended to use as a signal cable.

Dimmer & Power supply

Dimmer


For DC24V single color series	DIM-S1L10V-0	Constant Voltage - Dimmable driver (DC input) - 1ch	0-10V/1-10V Driver 10A x 1ch	EUCHIPS
-------------------------------	--------------	---	------------------------------	---------



Specification	
Product name	Dimmer Driver 0-10V/1-10V
Model number	DIM-S1L10V-0
Input voltage	DC12~24V
Output channel	1ch MAX 10A per 1channel
Size	175 × 56 × 28(mm)
Weight	-
Usage enviroment	Indoors (no condensation)
Oparating enviroment temprature	-

- Analog Signal driver,receive 0-10V/1-10V dimsingal.
- 1channel output,MAX 10A per 1ch.*Connectable 80% load=8A of LED
- Over-temperature protection

Wiring Diagram

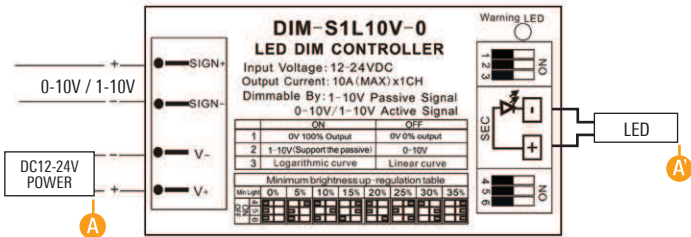

Maximum wiring distance from A - A is 10m/20m.Please refer to manuals of each product. Please check the maximum of connectable LED length in one series referring to the catalog page of each product.

When the LED total length exceeds the maximum length in series, please connect by separating into several circuit.

Twist shield cable is recommended to use as a signal cable.


For single color series	Walldim 103E1	Dimmer controller - 1ch	1-10V Dimmer Controller	EUCHIPS
-------------------------	---------------	-------------------------	-------------------------	---------



Specification	
Product name	1-10V dimmer
Model number	Walldim 103E1
Input voltage	200 - 240V
Output channel	1ch 10A
Size	86*86*42(mm)
Weight	140g
Usage enviroment	Indoor(no condensation)
Oparating enviroment temprature	-10℃ ~ 55℃

- Analog Signal driver,receive 1-10V dimsingal.

Wiring Diagram

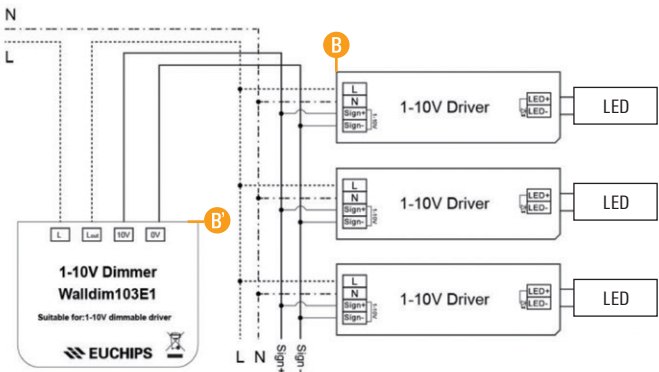

Maximum wiring distance from B - B' is 20m.

Please check the maximum of connectable LED length in one series referring to the catalog page of each product. When the LED total length exceeds the maximum length in series, please connect by separating into several circuit.

Twist shield cable is recommended to use as a signal cable.

* Please read and follow the specification and the instruction manual issued by the manufacturer of controller and driver. The specification may be subject to change without prior notice.

Dimmer & Power supply

For DC24V single color series	PWM-120-24	Constant Voltage - Dimmable driver (AC input) - 1ch	Dimmable power supply IP67	Meanwell
-------------------------------	------------	---	----------------------------	----------




- DC 24V constant voltage dimmable power supply
- IP67 waterproof
- 3 in 1 dimming function 0-10V, PWM, resistance

Wiring Diagram

Specification


Product name	120W PWM 24V dimmable driver
Model number	PWM-120-24
Input voltage	90 - 305 VAC
Output channel	24V 5A
Size	191*63*37.5(mm)
Weight	100g
IP rating	67
Operating enviroment temperature	-45℃ ~ 90℃

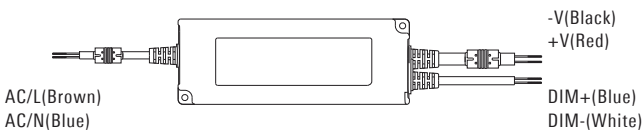

Twist shield cable is recommended to use as a signal cable.

- Dimmed manually by Walldim103E1 or Dimmed with Control System.

Cables -> Supplied by the installer

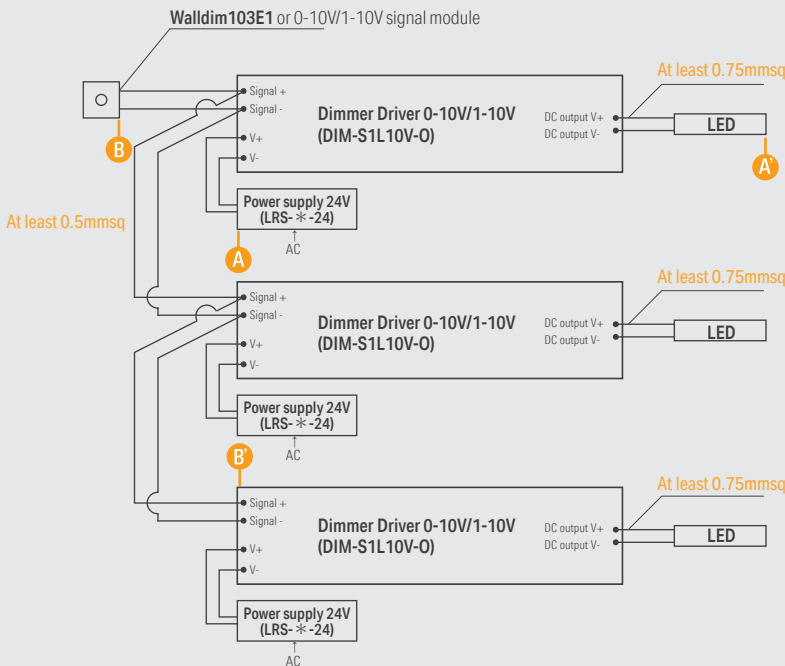

Maximum wiring distance from **A** power supply to **A** end of LED fixture is 10~20m, please refer to the specification page of each product..

Maximum diming signal wiring distance from **B** to **B** is 20m, connectable up to 20 pcs of DIM-S1L10V-O in one dimming circuit

Please check the maximum of connectable LED length in one series referring to the catalog page of each product. When the LED total length exceeds the maximum length in series, please connect by separating into several circuit.

Dimmer

For DC24V Dynamic white series	DIM-S2L8V-0	Constant Voltage - Dimmable driver (DC input) - 2ch	0-10V/1-10V Driver 8A, 2ch	EUCHIPS
--------------------------------	-------------	---	----------------------------	---------




- Support 3-in-1 dimming function(0-10V /1-10V active signal, Adjustable resistance, PWM)
- Support dimming mode selection
- Support the short circuit, over current protection and alarm function
- Logarithmic dimming curve
- Built-in CCT adjust mode, the user can adjust color temperature without changing the output power
- For adjusting the brightness/ color temperature of LED strip

Wiring Diagram

Specification

Product name	Dimmer Driver 2ch 0-10V/1-10V
Model number	DIM-S2L8V-0
Input voltage	12V - 24V
Output channel	2ch total 8A
Size	167*51*23(mm)
Weight	100g
Usage enviroment	Indoor(no condensation)
Operating enviroment temprature	-

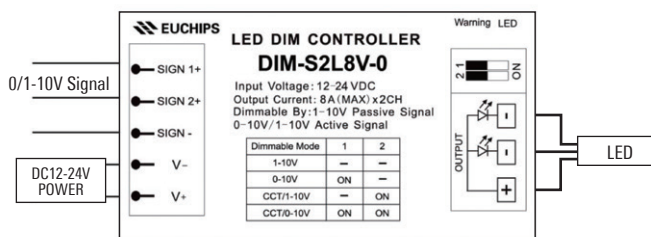

Twist shield cable is recommended to use as a signal cable.

Connectable length per dimmerble driver (DIM-S2L8V)

ex. when using 150W PSU, 60% load factor

Model No.	Output (W/m)	Max. length per circuit (m)	Connectable length per one driver (m)	W (VA)
LFPTH-1000--*CL-I	11	5	8.1*	89.1
LTH-1000-*DF-I	31.2	4	2.8	87.4


*Split into multiple circuit

For Dynamic white series	Walldim 202	Dimmer controller - 2ch	2ch Multi Function Panel Controller	EUCHIPS
--------------------------	-------------	-------------------------	-------------------------------------	---------



- Supply voltage of 12-15VDC
- Output 2 channels 0-10V analog dimming signal
- Can adjust brightness and color temperature of lamps
- Show the current brightness or color grades
- can be installed in compliance with DIN 49073 and 86 standard wall box

Wiring Diagram

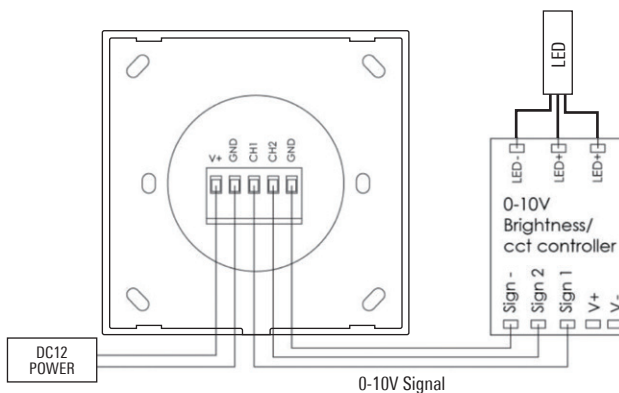

Twist shield cable is recommended to use as a signal cable.

Specification

Product name	Multi-Function Touch Panel Controller
Model number	Walldim202
Input voltage	12V - 15V
Output channel	50mA 2ch
Size	86*86*26(mm)
Weight	140g
Usage enviroment	Indoor(no condensation)
Operating enviroment temprature	-10°C ~ 40°C


Dimmer & Power supply

For Vivoxy Graze	HVGC-*.B	Constant Current - Dimmable driver (AC input) - 1ch	Constant Current dimmable driver IP67	Meanwell
------------------	----------	---	---------------------------------------	----------



- Wide input range 180 ~ 528 VAC
- Constant current mode output
- Metal housing with class I design
- IP67 / IP65 design for indoor or outdoor installations
- Function options:
output adjustable via potentiometer; 3 in 1 dimming (dim-to-off); Timer dimming

Wiring Diagram

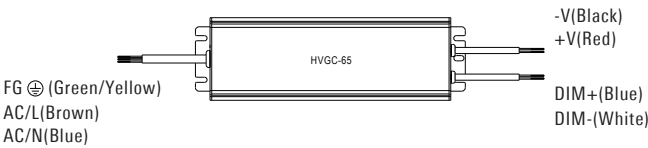

Twist shield cable is recommended to use as a signal cable.

Specification

Product name	Constant Current Mode LED Driver		
Model Number (for 700mA)	HVGC-65-700B	HVGC-100-700B	HVGC-150-700B
(for 500mA)	HVGC-65-500B	N/A	HVGC-150-500B
(for 350mA)	HVGC-65-350B	HVGC-100-350B	HVGC-150-350B
Rated Power	65W	100W	150W
Input Voltage range	180~ 528VAC		
IP rate	IP67		
Dimming type	3 in 1 dimming function (0-10Vdc, 10V PWM signal and resistance)		
Working temp. (Tcase)	-40℃~80℃		
Size (mm) (L*W*H)	189*61.5*36.8	236*68*38.8	245*68*38.8
Weight	0.77Kg	1.18Kg	1.24Kg

* Please read and follow the specification and the instruction manual issued by the manufacturer of controller and driver. The specification may be subject to change without prior notice.

Power Supply

With thorough quality control,
Luci continues to make products that customers can
use with confidence

Available for project in JAPAN


Quality policy of Luci ORILEGA

- In-house designed electric circuit and housing
- Reliability test and safety test conducted by our company and third-party test laboratory
- Ongoing operation test in high-temperature circumstance (60℃)
- Production process under Luci own standards and one hundred percent inspection

Luci ORILEGA conforms to various standards

PSE certified range: AC100 - 242V

ORILEGA is PSE compliant at all voltages. Voltage range that can be used not only in Japan but also in many overseas countries.

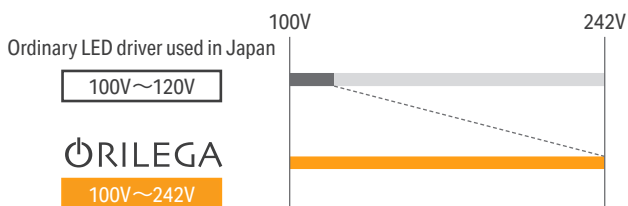

Quiet structure conforming to JIS

Reduced sound generation due to coil vibration during PWM dimming, maintaining operating noise in 25 dB or less. Meets the requirements of JIS C 8115 sound level.

Meets JIS C 8115
sound level requirements



Complied with CISPR11

CISPR is an abbreviation of French of the International Special Committee on Radio Interference, and it is a standard that sets electromagnetic tolerance for equipment that may be affected by electromagnetic waves. Available to use in hospital and medical institution as ORILEGA is in conformity to CISPR11 and CISPR15.



CE mark compliance / RoHS compliant with environmental directives

Available to import and use in EU as ORILEGA comply with CE mark which required to be labelled on the product complying with the laws and regulations and RoHS directive compliant with the environmental standard in EU. In addition, ORILEGA is designed according to the ENERGY STAR requirements.





Luci Power Supply AC100v-242v

ORILEGA



AC
100v
242v


PC isolated case, safe and durable structure

Robust structure conforming to Japan indoor wiring regulations aimed at securing the safety of electrical equipment Countermeasures against discoloration and overheating



Maximum distance to the terminal of LED fixture: 35 m


The distance from power supply to the terminal of LED fixture can be extended up to 35 m when the output cable is 1.25 sq mm.

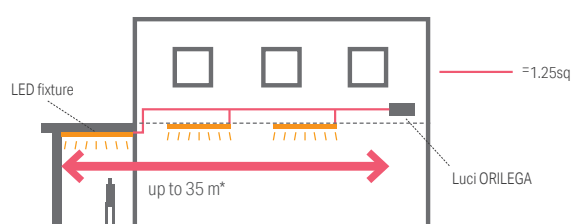

*In case using LED fixture which maximum length per series is 5m.


Structure of low heat dissipation

Since the legs are attached, the bottom of the power supply is away from the installation surface, air convects and heat is easy to escape from the power supply.

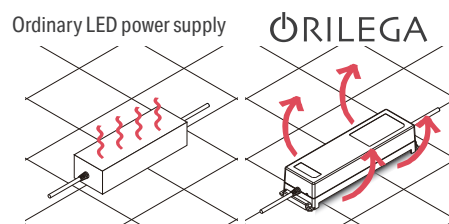


Low output ripple voltage

Ripple voltage occurs in DC24V output device. It may slightly affect the output effect of the LED fixtures. The lower output ripple voltage, the lower flickering occurs. Output ripple voltage of ORILEGA is 50mV which is lower than other power supply.

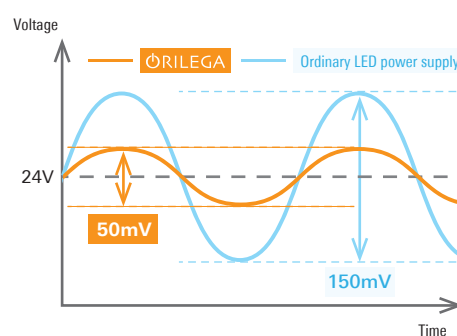

LPSOL-145/075/030

Luci ORILEGA 145W/75W/30W 24V



LPSOL	24	ND	I
Product Name	Rated output power	Output DC voltage	Dimming type
LPSOL	145: 145W 075: 75W 030: 30W	24: 24V	ND: Non dim
			I: Indoors


Certification

- PSE (AC100~242V)
- CE
- CCC
- RoHS
- IEC61000-3-2 Class C
- CISPR11, CISPR15
- JIS C 8115 Sound level requirement

Specification

	145W	75W	30W	
Model No.	LPSOL-145-24-ND-I	LPSOL-075-24-ND-I	LPSOL-030-24-ND-I	—
AC input voltage range	85~264 VAC			—
Classification	Constant Voltage			—
Output DC voltage	DC24V			—
Rated output power	145W	75W	30W	—
Recommended maximum loading	105W	52.5W	21W	70% loading recommended
Ripple voltage	Less than 50mV			Less flickering
Temperature protection	Device stop functioning when ambient temperature is over 80°C			Safety design
Material of outer case	Polycarbonate (UL94-V0 : Self-extinguishing)			Prevention of electric shock and short circuit
Form of outer case 1	PC isolated case			—
Form of outer case 2	Equipped with raised base			—
Input method	Black(L), White(N), Green (Earth)			Prevention of electric shock and short circuit
Output method	Black(DC+), White(DC-)			—
Dimming	Dimmer driver is needed for dimming usage (Low noise type)			Decrease noise during dimming
Dimension W×H×D	63 × 55 × 222 mm	50 × 52 × 258.6 mm	35 × 38 × 250 mm	—
Weight *Excluding packing material	580g	455g	215g	—
Output extension length	VCTF0.75sq : 20m VCTF1.25sq : 30m			—
Environment	Indoors (no condensation)			—
Option parts	Terminal block for Output side			—

External dimensions

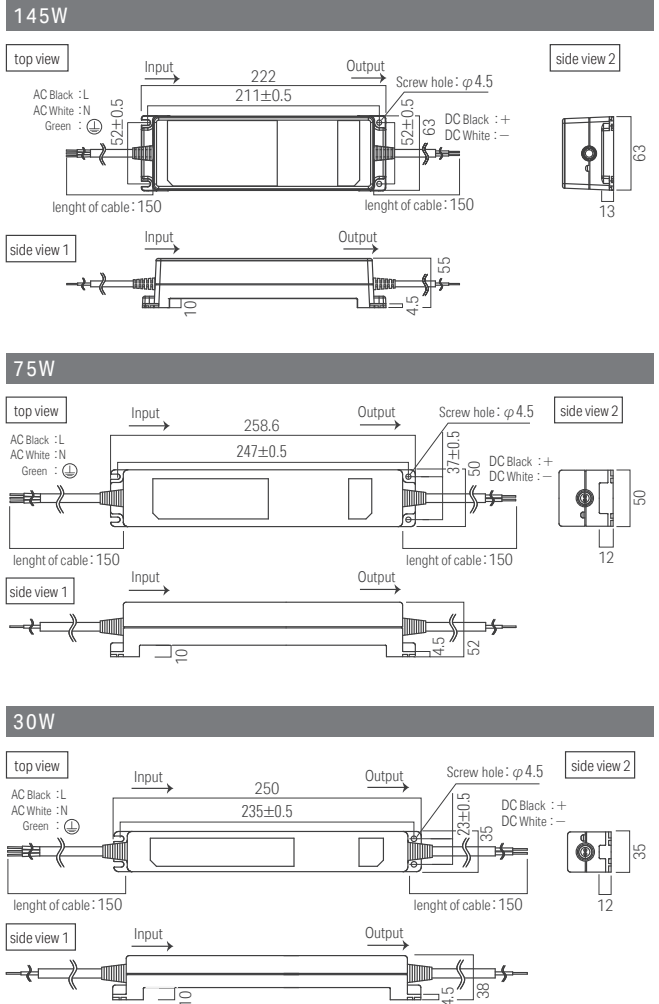


Characteristic table			145W			75W			30W			Unit
category	ITEM	conditions	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
Input	Current	AC100V	1.5	1.6	1.7	0.85	0.9	1.00	0.36	0.4	0.42	A
		AC220V	0.75	0.8	0.83	0.45	0.5	0.55	0.18	0.2	0.22	A
		AC240V	0.60	0.67	0.71	0.38	0.4	0.42	0.15	0.16	0.17	A
	Frequency	—	47	—	63	47	—	63	47	—	63	Hz
	Efficiency	AC100V	83	85	86	82	83	84	81	82	83	%
		AC220V	86	88	90	83	84	85	83	84	85	%
		AC240V	86	89	90	83	84	85	83	84	85	%
	Power Factor	AC100V	0.99	1.00	1.00	0.99	1.00	1.00	0.99	1.00	1.00	—
		AC220V	0.95	0.96	0.97	0.95	0.97	0.98	0.96	0.97	0.98	—
		AC240V	0.93	0.94	0.95	0.93	0.95	0.96	0.95	0.96	0.97	—
	Inrush Current	AC100V	35	40	45	25	30	40	10	15	20	A
		AC220V	35	40	45	25	30	40	25	30	40	A
		AC240V	35	40	45	25	30	40	25	30	40	A
Output	Leakage Current	AC100V	0.4	0.6	1.0	0.3	0.5	0.7	0.3	0.5	0.7	mA
		AC220V	0.4	0.6	1.0	0.3	0.5	0.7	0.3	0.5	0.7	mA
		AC240V	0.4	0.6	1.0	0.3	0.5	0.7	0.3	0.5	0.7	mA
	Voltage	—	23	24	25	23	24	25	23	24	25	V
	Current	—	—	6.1	6.1	—	3.125	3.125	—	1.25	1.25	A
	Rated output power	—	—	145	—	—	75	—	—	30	—	W
	Ripple	0~+50℃	30	45	50	30	45	50	30	45	50	mVp-p
	Start-UP time	AC100V	1000	1100	1200	600	800	1500	600	800	1500	ms
		AC240V	700	800	900	500	600	1000	500	600	1000	ms
	Hold - UP time	—	—	20	—	—	20	—	—	20	—	ms
Protection	over current protection	—	6.365	6.700	7.035	3.5	3.8	3.9	1.6	1.8	1.9	A
	over voltage protection	—	34	37	40	34	37	40	34	37	40	V
	short - circuit protection	—	Auto-recovery									—
	overheat protection	—	Auto-recovery									—
Others	operating indication	—	Green LED									—
Isolation	In - Out	—	3750V/ac 1min									—
	In - Earth	—	1875V/ac 1min									—
	Out - Earth	—	500V/ac 1min									—
Environment	Operating temp	—	0	—	50	0	—	50	0	—	50	℃
	Operating humid	—	20	—	90	20	—	90	20	—	90	%RH
	Storage temp	—	-20	—	70	-20	—	70	-20	—	70	℃
	Storage humid	—	10	—	90	10	—	90	10	—	90	%RH
	vibration	—	Frequency 500times to 800 times per minute Double amplitude 2mm to 3 mm Test time: 5 minutes / cycle Performed up to 10 cycles									—

Option parts

Terminal block for Output side
Model No. : LBX-01


Easy output side connection
Output box with built-in terminal block
Output branch (3 branch)

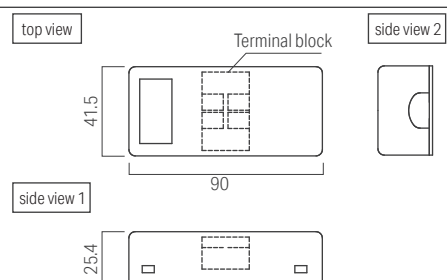

Dimmer & Power supply

Installation Guide

System configuration diagram

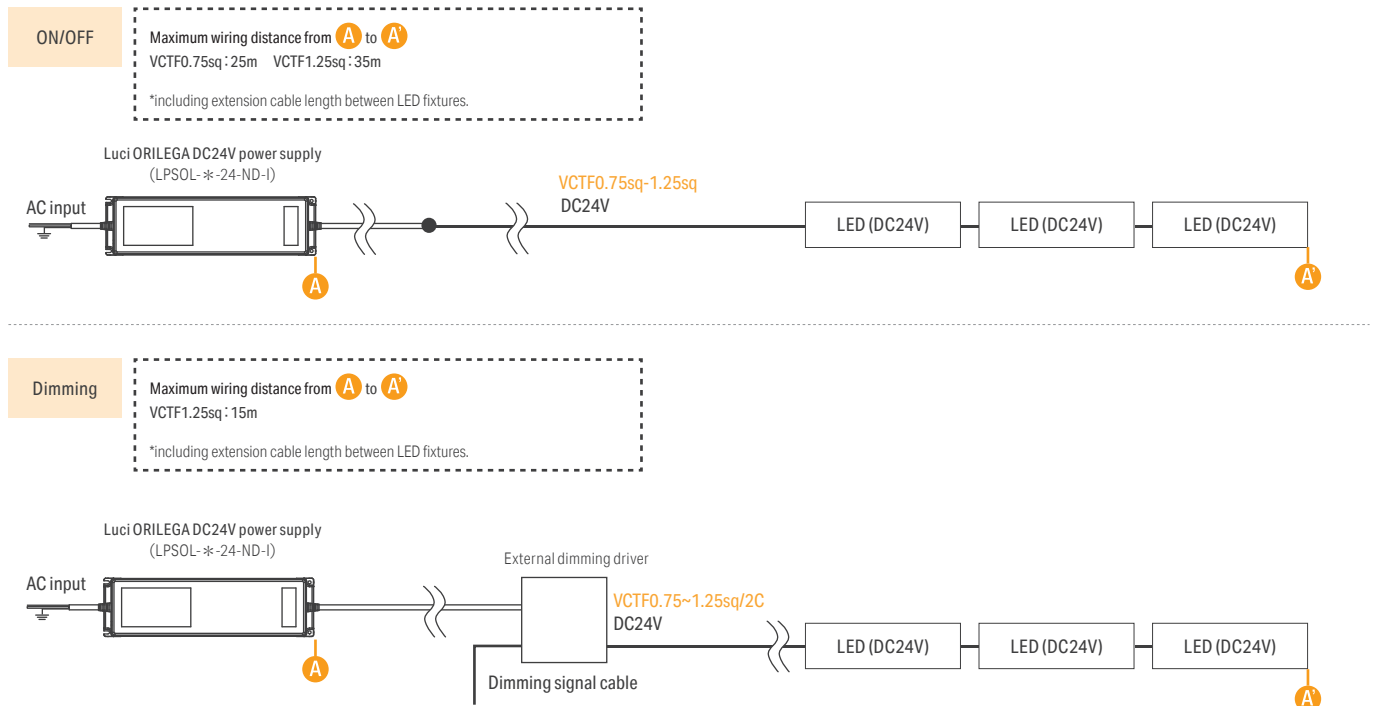

Connectable length for ORILEGA Series

Product Name	Model No.	Output DC24V	Max. length per circuit (m)	Connectable length per one driver (m) *: split into multiple circuits		
				145W	75W	30W
				LPSOL-145-24-ND-I	LPSOL-075-24-ND-I	LPSOL-030-24-ND-I
UQ FLEX / UQ FLEX α (15W)	LFU/LFUA-T1000WS- *-DF-I/O-15	15.8W/m	10.0 m	6.4 m*	3.3 m	1.3 m
UQ FLEX / UQ FLEX α (12W)	LFU/LFUA-T1000WS- *-DF-I/O-12	12.6W/m	10.0 m	8.4 m*	4.3 m	1.7 m
UQ FLEX / UQ FLEX α (8W)	LFU/LFUA-T1000WS- *-DF-I/O-8	8.4W/m	10.0 m	12.6 m*	6.5 m*	2.6 m
Power FLEX EX 15mm pitch	LFPEX15-T1000W- *-CL-I/O	18.2W/m	5.0 m(I) / 3.5 m(O)	5.6 m*	2.9 m	1.2 m
Power FLEX EX 20mm pitch	LFPEX20-T1000W- *-CL-I/O	12.1W/m	5.0 m	8.4 m*	4.3 m	1.7 m
Power FLEX EX 30mm pitch (9.5W)	LFPEX30-T1000W- *-CL-I/O -9	9.5W/m	5.0 m	10.7 m*	5.5 m*	2.2 m
Power FLEX EX 30mm pitch (6.5W)	LFPEX30-T1000W- *-CL-I/O -6	6.5W/m	5.0 m	15.6 m*	8.1 m*	3.2 m
Power FLEX EX 30mm pitch (4.5W)	LFPEX30-T1000W- *-CL-I/O -4	4.5W/m	5.0 m	22.6 m*	11.7 m*	4.7 m
Power FLEX Spect C 20mm pitch	LFPEC20-1000- *-CL-I	14.4W/m	5.0 m	7.0 m*	3.6 m	1.4 m
Power FLEX 15mm pitch	LFP15-T0900W- *-CL-I/O	15.4W/m	4.5 m	6.6 m*	3.4 m	1.4 m
Power FLEX 20mm pitch	LFP20-T1000W- *-CL-I/O	10.5W/m	5.0 m	9.7 m*	5.0 m	2.0 m
Flat FLEX F / FLEX α F 10mm pitch	LFTF10 or LFXF10-T1000W- *-CL-I/O	3.9W/m	5.0 m	26.0 m*	13.5 m*	5.4 m*
Flat FLEX F 16mm pitch	LFTF16-1000- *-CL-I/O	2.5W/m	5.0 m	40.6 m*	21.0 m*	8.4 m*
Power FLEX α 20mm pitch	LFPA20-0960- *-CL-I	10.4W/m	5.0 m	9.8 m*	5.0 m	2.0 m
RECTA	LRE-1003- *-DF-I	31.2W/m	3.3 m	3.3 m	1.7 m	0.7 m
Creide lens / Creide F	LCEL or LCEF-0880- *-DF-I	20.6W/m	5.0 m	4.9 m	2.5 m	1.0 m
silux K / silux wide K (13.1W)	LSXWK or LSXK-1008- *-DF-I-13	13.1W/m	6.0 m	7.7 m*	4.0 m	1.6 m
silux K / silux wide K (8.1W)	LSXWK or LSXK-1008- *-DF-I-8	8.1 W/m	6.0 m	12.5 m*	6.4 m	2.5 m
silux K / silux wide K (4.3W)	LSXWK or LSXK-1008- *-DF-I-4	4.3W/m	6.0 m	23.6 m*	12.2 m*	4.8 m
nano line	LNL-0984- *-DF-I	7.2W/m	5.0 m	14.1 m*	7.3 m*	2.9 m
Vivoxo FLEX IP67 (24W)	LVF40-1000W- *-O-24-*	24W/m	5.0 m	1.4 m	2.9 m	4.3 m
Vivoxo FLEX IP67 (16W)	LVF40-1000W- *-O-16-*	16W/m	5.0 m	2.1 m	4.37 m	6.5 m*
UQ FLEX Sauna	LFUS-T1000WS-L27-DF-O	5.1W	5.0 m	6.0 m*	12.0 m*	17.5 m*
EFRO IP65	LRO-0862- *-DF-IW	8.4W/m	4.5 m	12.1 m*	6.3 m*	2.5 m
Power LEDs Line IP65	L-ELA9K2-096**-24C-P	19.9W/m	9.0 m	5.1 m	2.6 m	1.1 m
LEDs Bar IP65	L-ELS7K1-098**-24	7.8W/m	6.9 m	13.0 m*	6.7 m	2.7 m
LEDs Line Hi IP67	L-ELR9K2-098**M-24	7.8W/m	6.9 m	13.0 m*	6.7 m	2.7 m

*Split into multiple circuit


* Please read and follow the specification and the instruction manual issued by the manufacturer of controller and driver. The specification may be subject to change without prior notice.

Dimmer & Power supply

Wire connection methods

Warning

Do not perform installation/ removal work while power on. Otherwise, an electric shock may occur.

- Make sure the place of installation has enough strength to hold the weight of the device.
- Make sure the LED fixture meets the specification of this device.
- Connect ACL wire (black) of the device to Live, ACN wire (white) of the device to Neutral, FG wire (green) of the device to .

Caution: Improper connection may cause smoking, fire, electric leakage, ground fault or electric shock.

- Connect the wires of LED fixture to DC black (+) and DC white (-) wires of the device correspondingly.

Note: For the procedure of connecting LED fixture, please refer to the instruction manual of each product.


- Check the strength of the place to install before screwing.

- Screws are not attached.

- Once all installation processes are completed, turn on the power and make sure the LED fixture lights up.



Cautions

- If connect AC main power to the DC output side, the device get damage instantly.
- Please ensure to connect the device to ground in order to protect from electric shock or devices from getting damaged by external noise.

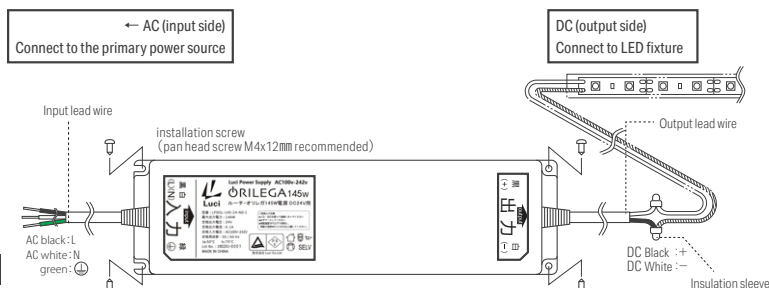


Installing the product


- When installing this product, please make sure to use screws (round head screw M4 x 12mm or longer is recommended) and fix tightly.
- To avoid being shortened lifetime of the device,
 - Do not stack the device on top of each,
 - Do not install the device by turning inside out or by upside down
 - Do not install multiple devices horizontally in parallel on a wall surface.
- Check the strength of the place to install before screwing.
- Screws are not attached.

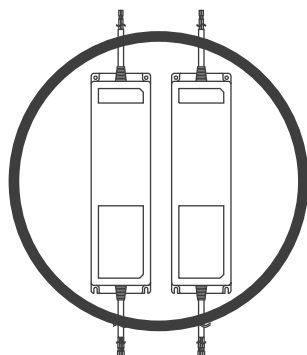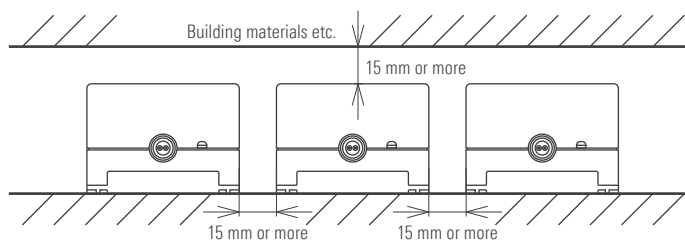


○ - It is possible to set up multiple devices in parallel on the wall if they are in vertical orientation!



○ Do not stack the devices!



○ Do not install upside down on the ceiling surface!

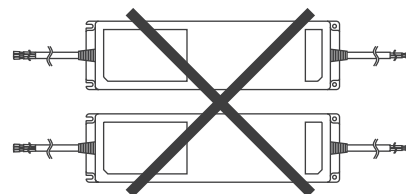

○ Do not install multiple devices in parallel if they are in horizontal orientation!

Maintenance and Inspection

- This product has a life span.
- Degradation occurs inside after 8-10 years of installation even when the device looks fine from the outside.
- Parts of the product degrade due to heat when using for a long period. This causes not only safety issues, but also reduces power efficiency and it is recommended to have regular maintenance and inspection.
- Life cycle of the product will be shorter in high ambient temperature or in the use for a long period.
- Cleaning and inspection should be performed at least once every 6 months.
- Inspection by a specialist, such as a product contractor, should be performed at least once every 3 years.
- If the product is used for a long time without having an inspection, there is a small possibility that it could lead to fuming, igniting, electric shock and the like.




Inspection Methods

- Is the output verification indicator (LED-green: located at the side of the lead-wire on output side) turned on?
- Are output voltage and output current in normal conditions?
- Is there any coloring/ fall-off/ abnormal heat build-up at wiring connection part?
- Is there any unusual smell, sound or heat?
- Are there any cracks, splits, or detached parts on any parts or joints?

Cleaning Method

- Turn off the power before cleaning the device.
- Lightly wipe this product with a soft cloth.
- To best clean this product, wipe dirt with a soft cloth which has been soaked in a neutral detergent diluted with water and wrung firmly. To finish off, wipe it with a damp cloth and dry it.

Power supply

Model	Product name	Model No.	Rating	Size	note	
CCC, CE Model	 35W Single Output Switching Power Supply	LRS-35-24	85~264VAC	DC24V 1.5A	W99 H82 D30	- MEAN WELL - I/O terminal block -Protections: Short circuit / Overload / Over voltage
	 100W Single Output Switching Power Supply	LRS-100-24		DC24V 4.5A	W129 H97 D30	
	 150W Single Output Switching Power Supply	LRS-150-24	85~132VAC / 170~264VAC by switch	DC24V 6.5A	W159 H97 D30	- MEAN WELL - I/O terminal block -Protections: Short circuit / Overload / Over voltage / Over temperatur

Specification may be subject to change without announcement.

* Please read and follow the specification and the instruction manual issued by the manufacturer of controller and driver. The specification may be subject to change without prior notice.

Power supply selection method

Pay attention to the electrical capacity of the load (lamp) connected to the power supply.

For 15 to 150W, consumption of 70% of a full power or less by the load is typically assumed.

When using dimming driver, the load factor of the LED fixtures connected to the power supply is recommended 60% or less to reduce the possibility of occurrence of noise.

Example: Choosing power supply for 10pcs of Luci Power FLEX 20mm pitch

Luci Power FLEX 20mm pitch 10.5W x 10pcs = 105W

$105W \div 70\%$ (load factor) = Approx. 150W

Select a 150W power supply.

Small noise may be emitted from the appliance and the dimmer while using the dimmer, but it is normal.

Load capacity of 60% is recommended to reduce noise.

Connecting to power supply

■ Cables used for connecting LED fixtures and Power supply must be a suitable type and gauge.

■ The cable should be joined with a suitable terminal. Otherwise, the power supply will be broken.


Please install appropriate environment according to specifications.

Caution: When using a long thin cable, the resistance of cable will increase. Voltage drop and heat accumulation may occur and result in brightness decreasing.

Caution: When separate one cable to multiple circuits in the same gauge, the current loading are collected on the junction of the branch circuit and it will be high temperature there. Please consider the loading of the power supply (quantity of LED fixture) and review the wiring system to avoid the above problem.

■ When connect the dimmer driver with power supply, unpredicted noise might occur. It is the characteristic of electronic devices, not a malfunction of the LED fixture.

Please choose an appropriate power supply and consider a place to install. Reducing the loading factor of LED fixture might improve the noise from the power supply, and the noise from LED fixtures might be improved by splitting the circuit of LED fixtures into multiple.

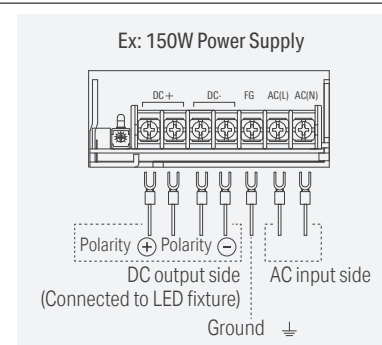



Luci Pte. Ltd.

CE Declaration of Conformity

Luci Pte. Ltd.

Singapore World HQ

52A Tanjong Pagar Road, Singapore 088473

We declare, Under our solo responsibility, that the product:

Product:

Luci Power FLEX EX
Luci Power FLEX
Luci Power FLEX α
Luci Flat FLEX F
Luci FLEX α F
Luci Power FLEX THOF
Luci Creide lens
Luci Creide F
Luci silux K
Luci silux wide K
Luci nano line
Luci Vivoxo Graze
Luci THOF
Luci EFRO
Luci RECTA
Luci UQ FLEX
Luci UQ FLEX α
Luci Vivoxo FLEX

Model:

LFPEX*(1)-T*(2)*(3)-(4)-CL-(6)-(7)
LFP*(1)-T*(2)*(3)-(4)-(5)-(6)
LFPA20-0960-(4)-CL-I
LFTF*(1)-T*(2)*(3)-(4)-(5)-(6)
LFXF10-T*(2)*(3)-(4)-(5)-(6)
LFP20-(2)-(4)-CL-I
LCEL-(2)-(4)-DF-I
LCEF-(2)-(4)-DF-I
LSXK-(2)-(4)-DF-I-(7)
LSXWK-(2)-(4)-DF-I-(7)
LNL-(2)-(4)-DF-I
LVV50-(2)-(4)-SP-I
LTH-(2)-(4)-DF-I
LRO-(2)-(4)-DF-IW
LRE-(2)-(4)-DF-I
LFU-T*(2)*(3)S-(4)-DF-(6)-(7)
LFUA-T*(2)*(3)S-(4)-DF-(6)-(7)
LVF-(2)*(3)-(4)-(8)-O-(9)-(10)

*(1) LED pitch
*(2) Length
*(3) Lead wire specifications
*(4) Light source color
*(6) Environment
*(7) Power consumption
*(8) Beam angle
*(9) Power consumption
*(10) Body color

Applied Harmonized Standards

EN 55015: 2013+A1: 2015 ; EN 61547: 2009 (IEC 61000-4-2:2008, IEC 61000-4-3:2006+A1:2007+A2:2010)

Electromagnetic Compatibility (EMC) Directive 2014/30/EU

Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

Equipment for general lighting purposes - EMC immunity requirements

EN 62493 : 2015 (IEC 62493:2015)

Low voltage (LVD) Directive 2014/35/EU

Assessment of lighting equipment related to human exposure to electromagnetic fields

EN 60598-1 : 2015 (IEC 60598-1:2014 (Modified))

Low voltage (LVD) Directive 2014/35/EU

Luminaires - Part 1: General requirements and tests

EN 60598-2-20 : 2015 (IEC 60598-2-20:2014)

Low voltage (LVD) Directive 2014/35/EU

Luminaires - Part 2-20: Particular requirements - Lighting chains

Energy-related Products (ErP) Directive 2009/125/EC

RoHS

Are compliant with the threshold requirements of the European Union's on Use of Hazardous Substances Directive.

Authorized Representative

Luci Pte. Ltd.

Singapore World HQ

52A Tanjong Pagar Road, Singapore 088473

Signature:

蔭山 順子

Junko Kageyama

Attention

■ About Lifetime

Our definition of LED lifetime is when 'the brightness becomes 70% of its original brightness' based on the theory which was decided on July 2005 by Japan Luminares Association. Luci calculates the lifetime based on brightness data, current data and so on.

Please understand that this is planned lifetime and it may differ depending on how the products are used.

■ Optical data

Specification may be subject to change without announcement.

The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

The calculation of "Luminaire efficacy (lm/W)" indicated in this catalog is "Luminaire efficacy (lm/W) = Total luminous flux (measured value) ÷ Power consumption (designed value)".

The "Light source color" indicated in this catalog and specification are the color code of the LED package, not the color temperature of the finished product.

Please contact us for further information of the CCT and CRI tolerance for each products.

■ LED Dimming and noise

When the dimming level is low, the following symptoms may be observed.

- LED doesn't turn on
- LED goes off for the sudden electricity decrease.
- Each LED may turn off at separate times when they are controlled by 1 dimmer.
- When connecting the dimmer driver with power supply, unpredicted noise might occur. It is a characteristic of electronic devices, not a malfunction of the LED fixture. Please choose an appropriate power supply and consider a place to install. Reducing the loading factor of LED fixture might improve the noise from the power supply while the noise for the LED fixtures might be improved by splitting the circuit of LED fixtures into multiple.

■ Effect of sulfur on LED

Please note that color temperature change, color unevenness, and illuminance reduction can occur due to the influence of sulfur even when used indoors. Some foods, chemicals, car exhaust gas contain sulfur ingredients.

■ Maintenance and Inspection

LED fixture has a life span. Degradation occurs inside after 8-10 years of installation even when the fixture looks fine from the outside. Parts of the LED fixture degrade due to heat when the light is on for a long time. This causes not only safety issues, but also reduces power efficiency and it is recommended to have regular maintenance and inspection.

Cleaning and inspection should be performed at least once every 6 months. Inspection by a specialist, such as a product contractor, should be performed at least once every 3 years.

If the LED fixture is used for a long time without having an inspection, there is a small possibility that it could lead to flaming, igniting, electric shock and the like.

Inspection Methods

1. Is LED operating normally?
2. Is there any unusual smell, sound or heat?
3. Are there any cracks, splits, or detached parts on any parts or joints?

Cleaning Methods

1. Lightly wipe the LED fixture with a soft cloth.
2. To best clean the LED fixture, wipe dirt with a soft cloth which has been soaked in a neutral detergent diluted with water and wrung firmly. To finish off, wipe it with a damp cloth and dry it.

■ Operating temperature

Unless otherwise stated in the user's manual or specification sheet, use the product at ambient temperatures between 0-35°C for indoor usage. For outdoor products, refer to the specification sheet and instruction manual since the operating ambient temperature varies depending on the product.

When temperature is higher than the data stated in the specification page, the lighting fixture may cause failure or malfunction.

■ Safety of power supply usage

Ensure appropriate installation in accordance with the user's manual of the power supply. Do not use an indoor power supply in outdoors, since it may cause damage, electric shock, smoking, and fires.

When installing in a ceiling, ensure easy access for checkups.

There are also other regulations for power supply installation, and therefore installation work should follow the electric facility construction standards of each country.

■ For safe use of the controller/driver

- Effect on radio

When radio reception is weak, the product may cause noise.

In such cases, keep the product away from the radio, or use an outside antenna.

- Effect on audio/video signal

Audio/video signals such as those from broadcast facilities are weak, and may be affected by electromagnetic waves from the product.

Use shielded wire for audio/video signals, or keep adequate distance from a signal wire to a power wire.

- Effect on medical devices

Effects may be occur depending on site environment, type of medical device, and noise-resistant properties of some device. Please do not use where you have concern on this issue.

■ Notes for purchase

For product improvement, the specifications, appearance, and price are subject to change without prior notice.

Consumption tax is not included in the price.

For further detail conditions and terms for purchasing and warranty, please contact Luci sales.

■ Cautions

Please make sure to use correct power supply which match the input voltage written in manual. Otherwise, it may cause damage or fire.

When the product is installed or removed, please make sure the power already turned off.

Do not modify the product. It may cause damage, electrify, or fire.

Product Warranty

Warranty period

There shall be a warranty period for the products sold by BUYER by LUCI, which shall be for a period of the following period from the date issued the packing list to BUYER by LUCI.

Three (3) years:

Creide® lens/F: LCEL/LCEF-*(2)-(4)-DF-I
Flat FLEX F Indoor/IP65: LFTF*(1)-T*(2)*(3)-(4)-(5)-(6)
FLEX α F Indoor/IP65: LFXF10-T*(2)*(3)-(4)-(5)-(6)
nano line: LNL-*(2)-(4)-DF-I
Power FLEX EX Indoor/IP65: LPFEX*(1)-T*(2)*(3)-(4)-CL-*(6)-(7)
Power FLEX Indoor/IP65: LFP*(1)-T*(2)*(3)-(4)-(5)-(6)
Power FLEX Spect C: LFPSC20-1000-*(4)-CL-*(6)-I
Power FLEX THOF®: LFPHT20-T*(2)*(3)-(4)-CL-I
Power FLEX α: LFPA20-0960-*(4)-CL-I
RECTA: LRE-*(2)-(4)-DF-I
silux® K: LSXK-*(2)-(4)-DF-I-*(7)
silux® wide K: LSXWK-*(2)-(4)-DF-I-*(7)
THOF: LTH-*(2)-(4)-DF-I
Vivoxy Graze: LVV50-*(2)-(4)-SP-I

Two (2) years:

EFRO IP65: LRO-*(2)-(4)-DF-IW
LEDs Bar IP65: L-ELS7K1-*(2)*(3)*(4)-24C
LEDs Line IP67: L-ELR9K2-*(2)*(3)*(4)M-24
Power LEDs Line IP65: L-ELA9K2-*(2)*(3)*(4)N-24C-P
UQ FLEX Indoor/IP67: LFU-T*(2)*(3)-(4)-DF-*(6)-(7)
UQ FLEX α Indoor/IP67: LFUA-T*(2)*(3)-(4)-DF-*(6)-(7)
Vivoxy FLEX IP67: LVF-*(2)*(3)-(4)-(8)-O-*(7)-(9)
Vivoxy Graze THOF: LVVTH50-*(2)-(4)-SP-I

One (1) year:

UQ Sauna IP67: LFUS-T*(2)*(3)-(4)-DF-*(6)-(7)

Note: *(1) LED pitch *(2) Length *(3) Lead wire specifications *(4) Light source color *(5) Tube type or Cover type *(6) Environment *(7) Power consumption *(8) Beam angle *(9) Body color

Warranty detail

When there is a product defect during the warranty period despite being installed according to instruction manuals, we replace the product or repair the product. Luci will not bear any cost of construction work related to recalling and replacing.

If the usage time per day exceeds for more than 20 hours, the warranty period is half of the period mentioned above.

Disclaimer

In the cases below, the repair or the replacement of our Products are not free of charge.

1. Consumable goods, consumable parts, etc
2. Failure or damage due to misuse, unwarranted repairs or modifications
3. Failure or damage due to dropping, falling over, impacts and mishandling during shipping, storing or after delivery
4. Failure or damage due to fire, salt damage, gas damage (corrosive gas, combustible gas, etc.), organic solvents such as paint liquid, earthquake, storm and flood damage, lightning damage, abnormal voltage or other natural disasters
5. Failure or damage due to unsatisfactory constructions
6. Failure or damage by using an inappropriate power source
7. Failure and damage when using inappropriate power supply and LED driver
8. Failure including luminare, colour hue and colour temperature deterioration or yellowed main body due to aging or dirtiness
9. Failure or damage when the parts where connected to a power source or the connectors of the terminals are not insulated
10. Failure and damage caused by rats, dogs, cats or other animals or insects
11. Failure or damage when used in an installed environment or condition which is not advised or prohibited in the instruction manual of each product
12. Failure or damage when lead wire connected parts are not waterproofed properly for outside use
13. Failure or damage when product is altered except for cutting strip light for indoor usage
14. No warranty document
15. Some items in this warranty document are blank or words are rewritten
16. Compensation for business loss, compensation or the like for indirect costs due to failure or damage of the product
17. Failure or damage due to lack of maintainance work
18. Failure or damage caused by causes other than those mentioned above which cannot be attributed to Luci.

We shall not cover any indirect operation responsibility and remedy responsibility for the product damage or failure.

Model No. INDEX

	Model No.	Product name	Page
CAD	CAD-0500-MDFD-I	Power supply cable 500mm for THOF	121
	CAD-1000-MCFC-I	Joint cable 1000mm for SL connector	35, 37, 115, 127, 137, 147
	CAD-1000-MPPF-O	Joint cable 1M for UQ FLEX	173, 179, 181
	CAD-3000-MCNN-I	Power supply cable 3000mm for SL connector	35, 37, 115, 127, 137, 147
	CAD-3000-MEFE-O	Outdoor cable 3M TR connector for FLEX	193, 199, 205, 211
	CAD-5000-MCFC-I	Joint cable 5000mm for SL connector	35, 37
	CAD-5000-SETB-I	Joint cable set 5M for Vivoxo Graze	99, 107
	CAD-V010M-FPNN-O	Power supply cable 10M for UQ FLEX	173, 179, 181
	CAD-V010M-FQNN-O	Power supply cable 10M for Vivoxo FLEX	165
	CAD-V1000-MQFQ-O	Joint cable 1M for Vivoxo FLEX	165
	CAD-VA5000-FJNN-O	Power supply cable 5M for AH1 connector OD3.5	217
	CC-MJ-O	Connector cover for AH1 connector	217
D	DALI6010	DALI Dimmer 10A*1ch	241
	DIM-S1L10V-O	Dimmer Driver 0-10V/1-10V	242
	DIM-S2L8V-O	Dimmer Driver 2ch 0-10V/1-10V	244
E	EECC220-805	Joint cable EECC 500mm	225
	EECC220-810	Joint cable EECC 1000mm	225
	EECC220-820	Joint cable EECC 2000mm	225
	EECC220-840	Joint cable EECC 4000mm	225
	EECC220-860	Joint cable EECC 6000mm	225
	EEJJ220-305	Joint cable EEJJ 500mm	231, 237
	EEJJ220-310	Joint cable EEJJ 1000mm	231, 237
	EEJJ220-320	Joint cable EEJJ 2000mm	231, 237
	EEJJ220-340	Joint cable EEJJ 4000mm	231, 237
	EEJJ220-360	Joint cable EEJJ 6000mm	231, 237
	ELR9K-FS-MA	SUS Mounting clip for LEDs Line IP67	237
	ELS7K-FH	Lift clip for LEDs Bar IP65	231
	ELS7K-FS	Mounting clip for LEDs Bar IP65	231
EPY	EPYC220-805-K	Power supply cable EPYC 500mm	225
	EPYC220-810-K	Power supply cable EPYC 1000mm	225
	EPYC220-820-K	Power supply cable EPYC 2000mm	225
	EPYC220-840-K	Power supply cable EPYC 4000mm	225
	EPYJ220-305-K	Power supply cable EPYJ 500mm	231, 237
	EPYJ220-310-K	Power supply cable EPYJ 1000mm	231, 237
	EPYJ220-320-K	Power supply cable EPYJ 2000mm	231, 237
	EPYJ220-340-K	Power supply cable EPYJ 4000mm	231, 237
HVGC	HVGC-100-700B	Constant current mode LED driver for 700mA 100W	245
	HVGC-100-350B	Constant current mode LED driver for 350mA 100W	245
	HVGC-150-700B	Constant current mode LED driver for 700mA 150W	245
	HVGC-150-500B	Constant current mode LED driver for 500mA 150W	245
	HVGC-150-350B	Constant current mode LED driver for 350mA 150W	245
	HVGC-65-700B	Constant current mode LED driver for 700mA 65W	245
	HVGC-65-500B	Constant current mode LED driver for 500mA 65W	245
	HVGC-65-350B	Constant current mode LED driver for 350mA 65W	245
L-ELA9K2	L-ELA9K2-012***-24C-P	Power LEDs Line IP65 012	224
	L-ELA9K2-024***-24C-P	Power LEDs Line IP65 024	224
	L-ELA9K2-036***-24C-P	Power LEDs Line IP65 036	224
	L-ELA9K2-048***-24C-P	Power LEDs Line IP65 048	224
	L-ELA9K2-060***-24C-P	Power LEDs Line IP65 060	224
	L-ELA9K2-072***-24C-P	Power LEDs Line IP65 072	224
	L-ELA9K2-084***-24C-P	Power LEDs Line IP65 084	224
	L-ELA9K2-096***-24C-P	Power LEDs Line IP65 096	224
	L-ELA9K2-108***-24C-P	Power LEDs Line IP65 108	224
	L-ELA9K2-120***-24C-P	Power LEDs Line IP65 120	224
	L-ELA9K2-132***-24C-P	Power LEDs Line IP65 132	224
	L-ELA9K2-144***-24C-P	Power LEDs Line IP65 144	224
L-ELR9K2	L-ELR9K2-014**M-24	LEDs Line IP67 014	236
	L-ELR9K2-026**M-24	LEDs Line IP67 026	236
	L-ELR9K2-038**M-24	LEDs Line IP67 038	236
	L-ELR9K2-050**M-24	LEDs Line IP67 050	236
	L-ELR9K2-062**M-24	LEDs Line IP67 062	236
	L-ELR9K2-074**M-24	LEDs Line IP67 074	236
	L-ELR9K2-086**M-24	LEDs Line IP67 086	236
	L-ELR9K2-098**M-24	LEDs Line IP67 098	236
	L-ELR9K2-110**M-24	LEDs Line IP67 110	236
	L-ELR9K2-122**M-24	LEDs Line IP67 122	236
	L-ELR9K2-134**M-24	LEDs Line IP67 134	236
	L-ELR9K2-146**M-24	LEDs Line IP67 146	236

	Model No.	Product name	Page
L-ELS7K1	L-ELS7K1-014**-24	LEDs Bar IP65 014	230
	L-ELS7K1-026**-24	LEDs Bar IP65 026	230
	L-ELS7K1-038**-24	LEDs Bar IP65 038	230
	L-ELS7K1-050**-24	LEDs Bar IP65 050	230
	L-ELS7K1-062**-24	LEDs Bar IP65 062	230
	L-ELS7K1-074**-24	LEDs Bar IP65 074	230
	L-ELS7K1-086**-24	LEDs Bar IP65 086	230
	L-ELS7K1-098**-24	LEDs Bar IP65 098	230
	L-ELS7K1-110**-24	LEDs Bar IP65 110	230
	L-ELS7K1-122**-24	LEDs Bar IP65 122	230
	L-ELS7K1-134**-24	LEDs Bar IP65 134	230
	L-ELS7K1-146**-24	LEDs Bar IP65 146	230
LCE	LCE-PT-A	Mounting clip A for Creide	127
	LCE-PT-B	Outer clip for Creide	127
LCEF	LCEF-0150-*-DF-I	Luci Creide F 150	126
	LCEF-0300-*-DF-I	Luci Creide F 300	126
	LCEF-0510-*-DF-I	Luci Creide F 510	126
	LCEF-0880-*-DF-I	Luci Creide F 880	126
	LCEF-1170-*-DF-I	Luci Creide F 1170	126
	LCEF-1460-*-DF-I	Luci Creide F 1460	126
LCEL	LCEL-0150-*-DF-I	Luci Creide lens 150	126
	LCEL-0300-*-DF-I	Luci Creide lens 300	126
	LCEL-0510-*-DF-I	Luci Creide lens 510	126
	LCEL-0880-*-DF-I	Luci Creide lens 880	126
	LCEL-1170-*-DF-I	Luci Creide lens 1170	126
	LCEL-1460-*-DF-I	Luci Creide lens 1460	126
LFP	LFP-45RL1000	45° Mounting rail 1000 for Power FLEX	49, 59, 63, 71, 193, 199
	LFP-EC	End cap for Power FLEX	49, 59, 63, 71
	LFP-PT	Mounting clip for rail	49, 59, 63, 71, 193, 199
	LFP-RC	Mounting clip for Power FLEX	49, 59, 63, 71, 193, 199
	LFP-RL0900	Mounting rail 900 for Power FLEX	63, 199
	LFP-RL1000	Mounting rail 1000 for Power FLEX	49, 59, 63, 71, 193, 199
	LFP-RL1000-AL	Aluminium Mounting rail 1000 for Power FLEX	49, 59, 63, 71, 193, 199
	LFP15-T0900W-*-CL-I	Luci Power FLEX 15mmPitch Indoor	62
	LFP15-T0900W-*-CL-O	Luci Power FLEX 15mmPitch IP65	198
	LFP15-T**-*-I	Luci Power FLEX 15mmPitch Indoor Custom order	65
	LFP15-T**-*-O	Luci Power FLEX 15mmPitch IP65 Custom order	201
	LFP20-T1000W-*-CL-I	Luci Power FLEX 20mmPitch Indoor	62
	LFP20-T1000W-*-CL-O	Luci Power FLEX 20mmPitch IP65	198
	LFP20-T**-*-I	Luci Power FLEX 20mmPitch Indoor Custom order	65
	LFP20-T**-*-O	Luci Power FLEX 20mmPitch IP65 Custom order	201
LFPA	LFPA-EC	End cap for Power FLEX α	85
	LFPA-PT	Mounting clip for rail	85
	LFPA-RL0030	Mounting parts for Power FLEX α	85
	LFPA-RL0900	Mounting rail 900 for Power FLEX α	85
	LFPA20-0960-*-CL-I	Luci Power FLEX α	84
LFPEX	LFPEX15-T1000W-*-CL-I	Luci Power FLEX EX 15mmPitch Indoor	48
	LFPEX15-T1000W-*-CL-O	Luci Power FLEX EX 15mmPitch IP65	192
	LFPEX15-T**-*-I	Luci Power FLEX EX 15mmPitch Indoor Custom order	51
	LFPEX15-T**-*-O	Luci Power FLEX EX 15mmPitch IP65 Custom order	195
	LFPEX20-T1000W-*-CL-I	Luci Power FLEX EX 20mmPitch Indoor	48
	LFPEX20-T1000W-*-CL-O	Luci Power FLEX EX 20mmPitch IP65	192
	LFPEX20-T**-*-I	Luci Power FLEX EX 20mmPitch Indoor Custom order	51
	LFPEX20-T**-*-O	Luci Power FLEX EX 20mmPitch IP65 Custom order	195
	LFPEX30-T1000W-*-CL-I-4	Luci Power FLEX EX 30mmPitch(4.5W) Indoor	48
	LFPEX30-T1000W-*-CL-I-6	Luci Power FLEX EX 30mmPitch(6.5W) Indoor	48
	LFPEX30-T1000W-*-CL-I-9	Luci Power FLEX EX 30mmPitch(9.5W) Indoor	48
	LFPEX30-T1000W-*-CL-O-4	Luci Power FLEX EX 30mmPitch(4.5W) IP65	192
	LFPEX30-T1000W-*-CL-O-6	Luci Power FLEX EX 30mmPitch(6.5W) IP65	192
	LFPEX30-T1000W-*-CL-O-9	Luci Power FLEX EX 30mmPitch(9.5W) IP65	192
	LFPEX30-T**-*-I-4	Luci Power FLEX EX 30mmPitch(4.5W) Indoor Custom order	51
	LFPEX30-T**-*-I-6	Luci Power FLEX EX 30mmPitch(6.5W) Indoor Custom order	51
	LFPEX30-T**-*-I-9	Luci Power FLEX EX 30mmPitch(9.5W) Indoor Custom order	51
	LFPEX30-T**-*-O-4	Luci Power FLEX EX 30mmPitch(4.5W) IP65 Custom order	195
	LFPEX30-T**-*-O-6	Luci Power FLEX EX 30mmPitch(6.5W) IP65 Custom order	195
	LFPEX30-T**-*-O-9	Luci Power FLEX EX 30mmPitch(9.5W) IP65 Custom order	195
LFPSC	LFPSC-1000-*-CL-I	Luci Power FLEX Spect C	58
LFPTH	LFPTH20-1000-*-CL-I	Luci Power FLEX THOF	70
LFT	LFT-PT	Mounting clip for rail	77, 205
	LFT-RC	Mounting clip for Flat FLEX	77, 205
	LFT-RL1000	Mounting rail 1000 for Flat FLEX	77, 205

Model No. INDEX

	Model No.	Product name	Page
LFTF	LFTF10-T1000W-*-CL-I	Luci Flat FLEX 10mmPitch Indoor	76
	LFTF10-T1000W-*-CL-O	Luci Flat FLEX 10mmPitch IP65	204
	LFTF10-T**-*-I	Luci Flat FLEX 10mmPitch Indoor Custom order	79
	LFTF10-T**-*-O	Luci Flat FLEX 10mmPitch IP65 Custom order	207
	LFTF16-T1000W-*-CL-I	Luci Flat FLEX 16mmPitch Indoor	76
	LFTF16-T1000W-*-CL-O	Luci Flat FLEX 16mmPitch IP65	204
	LFTF16-T**-*-I	Luci Flat FLEX 16mmPitch Indoor Custom order	79
	LFTF16-T**-*-O	Luci Flat FLEX 16mmPitch IP65 Custom order	207
LFU	LFU-EC	Endcap for UQ FLEX indoor	35, 37
	LFU-PT-C	SUS hold Clip for UQ FLEX aluminum rail	173, 179, 181
	LFU-PT-E	Joint Plate for UQ FLEX aluminum rail	173, 179, 181
	LFU-RC	PC Mounting clip for UQ FLEX	35, 37
	LFU-RC-B	SUS Mounting clip for UQ FLEX	173, 179, 181
	LFU-RL0018-AL-C	Aluminum mounting parts set for UQ FLEX	179, 181
	LFU-RL0018-AL-C-I	AL mounting parts set for UQ FLEX Indoor	35, 37
	LFU-RL0950-AL-C	Aluminum mounting rail 950 set for UQ FLEX	173, 179, 181
	LFU-RL0950-AL-C-I	Aluminium mounting rail 950 set for UQ FLEX Indoor	35, 37
	LFU-T1000SB-*-DF-I-15	Luci UQ FLEX Indoor 15W One side lead wire,Back feed	34
	LFU-T1000SR-*-DF-I-15	Luci UQ FLEX Indoor 15W One side lead wire,Side(Right) feed	34
	LFU-T1000SB-*-DF-I-12	Luci UQ FLEX Indoor 12W One side lead wire,Back feed	34
	LFU-T1000SR-*-DF-I-12	Luci UQ FLEX Indoor 12W One side lead wire,Side(Right) feed	34
	LFU-T1000SB-*-DF-I-8	Luci UQ FLEX Indoor 8W One side lead wire,Back feed	34
	LFU-T1000SR-*-DF-I-8	Luci UQ FLEX Indoor 8W One side lead wire,Side(Right) feed	34
	LFU-T1000WB-*-DF-I-15	Luci UQ FLEX Indoor 15W Both ends lead wire,Back feed	34
	LFU-T1000WR-*-DF-I-15	Luci UQ FLEX Indoor 15W Both ends lead wire,Side(Right) feed	34
	LFU-T1000WB-*-DF-I-12	Luci UQ FLEX Indoor 12W Both ends lead wire,Back feed	34
	LFU-T1000WR-*-DF-I-12	Luci UQ FLEX Indoor 12W Both ends lead wire,Side(Right) feed	34
	LFU-T1000WB-*-DF-I-8	Luci UQ FLEX Indoor 8W Both ends lead wire,Back feed	34
	LFU-T1000WR-*-DF-I-8	Luci UQ FLEX Indoor 8W Both ends lead wire,Side(Right) feed	34
	LFU-T1000SB-*-DF-O-15	Luci UQ FLEX IP67 15W One side lead wire,Back feed	178
	LFU-T1000SR-*-DF-O-15	Luci UQ FLEX IP67 15W One side lead wire,Side(Right) feed	178
	LFU-T1000SS-*-DF-O-15	Luci UQ FLEX IP67 15W One side lead wire,Straight feed	178
	LFU-T1000SB-*-DF-O-12	Luci UQ FLEX IP67 12W One side lead wire,Back feed	178
	LFU-T1000SR-*-DF-O-12	Luci UQ FLEX IP67 12W One side lead wire,Side(Right) feed	178
	LFU-T1000SS-*-DF-O-12	Luci UQ FLEX IP67 12W One side lead wire,Straight feed	178
	LFU-T1000SB-*-DF-O-8	Luci UQ FLEX IP67 8W One side lead wire,Back feed	178
	LFU-T1000SR-*-DF-O-8	Luci UQ FLEX IP67 8W One side lead wire,Side(Right) feed	178
	LFU-T1000SS-*-DF-O-8	Luci UQ FLEX IP67 8W One side lead wire,Straight feed	178
	LFU-T1000WB-*-DF-O-15	Luci UQ FLEX IP67 15W Both ends lead wire,Back feed	178
	LFU-T1000WR-*-DF-O-15	Luci UQ FLEX IP67 15W Both ends lead wire,Side(Right) feed	178
	LFU-T1000WS-*-DF-O-15	Luci UQ FLEX IP67 15W Both ends lead wire,Straight feed	178
	LFU-T1000WB-*-DF-O-12	Luci UQ FLEX IP67 12W Both ends lead wire,Back feed	178
	LFU-T1000WR-*-DF-O-12	Luci UQ FLEX IP67 12W Both ends lead wire,Side(Right) feed	178
	LFU-T1000WS-*-DF-O-12	Luci UQ FLEX IP67 12W Both ends lead wire,Straight feed	178
	LFU-T1000WB-*-DF-O-8	Luci UQ FLEX IP67 8W Both ends lead wire,Back feed	178
	LFU-T1000WR-*-DF-O-8	Luci UQ FLEX IP67 8W Both ends lead wire,Side(Right) feed	178
	LFU-T1000WS-*-DF-O-8	Luci UQ FLEX IP67 8W Both ends lead wire,Straight feed	178
LFUA	LFUA-T1000SB-*-DF-I-15	Luci UQ FLEX α Indoor 15W One side lead wire,Back feed	36
	LFUA-T1000SR-*-DF-I-15	Luci UQ FLEX α Indoor 15W One side lead wire,Side(Right) feed	36
	LFUA-T1000SB-*-DF-I-12	Luci UQ FLEX α Indoor 12W One side lead wire,Back feed	36
	LFUA-T1000SR-*-DF-I-12	Luci UQ FLEX α Indoor 12W One side lead wire,Side(Right) feed	36
	LFUA-T1000SB-*-DF-I-8	Luci UQ FLEX α Indoor 8W One side lead wire,Back feed	36
	LFUA-T1000SR-*-DF-I-8	Luci UQ FLEX α Indoor 8W One side lead wire,Side(Right) feed	36
	LFUA-T1000WB-*-DF-I-15	Luci UQ FLEX α Indoor 15W Both ends lead wire,Back feed	36
	LFUA-T1000WR-*-DF-I-15	Luci UQ FLEX α Indoor 15W Both ends lead wire,Side(Right) feed	36
	LFUA-T1000WB-*-DF-I-12	Luci UQ FLEX α Indoor 12W Both ends lead wire,Back feed	36
	LFUA-T1000WR-*-DF-I-12	Luci UQ FLEX α Indoor 12W Both ends lead wire,Side(Right) feed	36
	LFUA-T1000WB-*-DF-I-8	Luci UQ FLEX α Indoor 8W Both ends lead wire,Back feed	36
	LFUA-T1000WR-*-DF-I-8	Luci UQ FLEX α Indoor 8W Both ends lead wire,Side(Right) feed	36

	Model No.	Product name	Page
LFUA	LFUA-T1000SB-*-DF-O-15	Luci UQ FLEX α IP67 15W One side lead wire,Back feed	180
	LFUA-T1000SR-*-DF-O-15	Luci UQ FLEX α IP67 15W One side lead wire,Side(Right) feed	180
	LFUA-T1000SS-*-DF-O-15	Luci UQ FLEX α IP67 15W One side lead wire,Straight feed	180
	LFUA-T1000SB-*-DF-O-12	Luci UQ FLEX α IP67 12W One side lead wire,Back feed	180
	LFUA-T1000SR-*-DF-O-12	Luci UQ FLEX α IP67 12W One side lead wire,Side(Right) feed	180
	LFUA-T1000SS-*-DF-O-12	Luci UQ FLEX α IP67 12W One side lead wire,Straight feed	180
	LFUA-T1000SB-*-DF-O-8	Luci UQ FLEX α IP67 8W One side lead wire,Back feed	180
	LFUA-T1000SR-*-DF-O-8	Luci UQ FLEX α IP67 8W One side lead wire,Side(Right) feed	180
	LFUA-T1000SS-*-DF-O-8	Luci UQ FLEX α IP67 8W One side lead wire,Straight feed	180
	LFUA-T1000WB-*-DF-O-15	Luci UQ FLEX α IP67 15W Both ends lead wire,Back feed	180
	LFUA-T1000WR-*-DF-O-15	Luci UQ FLEX α IP67 15W Both ends lead wire,Side(Right) feed	180
	LFUA-T1000WS-*-DF-O-15	Luci UQ FLEX α IP67 15W Both ends lead wire,Straight feed	180
	LFUA-T1000WB-*-DF-O-12	Luci UQ FLEX α IP67 12W Both ends lead wire,Back feed	180
	LFUA-T1000WR-*-DF-O-12	Luci UQ FLEX α IP67 12W Both ends lead wire,Side(Right) feed	180
	LFUA-T1000WS-*-DF-O-12	Luci UQ FLEX α IP67 12W Both ends lead wire,Straight feed	180
	LFUA-T1000WB-*-DF-O-8	Luci UQ FLEX α IP67 8W Both ends lead wire,Back feed	180
	LFUA-T1000WR-*-DF-O-8	Luci UQ FLEX α IP67 8W Both ends lead wire,Side(Right) feed	180
	LFUA-T1000WS-*-DF-O-8	Luci UQ FLEX α IP67 8W Both ends lead wire,Straight feed	180
LFUS	LFUS-T1000S-L27-DF-O	Luci UQ FLEX Sauna One end lead wire	172
	LFUS-T1000W-L27-DF-O	Luci UQ FLEX Sauna Both ends lead wire	172
	LFUS-T*S-L27-DF-O	Luci UQ FLEX Sauna Custom order, One end lead wire	175
	LFUS-T*W-L27-DF-O	Luci UQ FLEX Sauna Custom order, Both ends lead wire	175
LFX	LFX-EC	End cap for α Flat	77, 91
	LFX-RC	Mounting clip for FLEX α rail	91, 211
	LFX-RC-B	Mounting clip B for FLEX α	91, 211
	LFX-RL0015	Mounting parts for rail	91, 211
	LFX-RL1000	Mounting rail 1000 for FLEX α	91, 211
	LFXF10-1T000W-*-CL-I	Luci FLEX α Indoor	90
	LFXF10-T1000W-*-CL-O	Luci FLEX α IP65	210
	LFXF10-T**-*-I	Luci FLEX α Indoor Custom order	93
	LFXF10-T**-*-O	Luci FLEX α IP65 Custom order	213
LNL	LNL-0109-*-DF-I	Luci nano line 109	156
	LNL-0206-*-DF-I	Luci nano line 206	156
	LNL-0303-*-DF-I	Luci nano line 303	156
	LNL-0400-*-DF-I	Luci nano line 400	156
	LNL-0498-*-DF-I	Luci nano line 498	156
	LNL-0595-*-DF-I	Luci nano line 595	156
	LNL-0692-*-DF-I	Luci nano line 692	156
	LNL-0789-*-DF-I	Luci nano line 789	156
	LNL-0886-*-DF-I	Luci nano line 886	156
	LNL-0984-*-DF-I	Luci nano line 984	156
	LNL-MG	Magnet for nano line	157
	LNL-PTA	Mounting clip A for nano line	157
LPSOL	LPSOL-030-24-ND-I	Luci ORILEGA 30W 24V	248
	LPSOL-075-24-ND-I	Luci ORILEGA 75W 24V	248
	LPSOL-145-24-ND-I	Luci ORILEGA 145W 24V	248
LRE	LRE-0103-*-DF-I	Luci RECTA 103	114
	LRE-0205-*-DF-I	Luci RECTA 205	114
	LRE-0306-*-DF-I	Luci RECTA 306	114
	LRE-0407-*-DF-I	Luci RECTA 407	114
	LRE-0503-*-DF-I	Luci RECTA 503	114
	LRE-0604-*-DF-I	Luci RECTA 604	114
	LRE-0705-*-DF-I	Luci RECTA 705	114
	LRE-0806-*-DF-I	Luci RECTA 806	114
	LRE-0907-*-DF-I	Luci RECTA 907	114
	LRE-1003-*-DF-I	Luci RECTA 1003	114
LRO	LRO-0162-*-DF-IW	Luci EFRO IP65 162	216
	LRO-0302-*-DF-IW	Luci EFRO IP65 302	216
	LRO-0582-*-DF-IW	Luci EFRO IP65 582	216
	LRO-0862-*-DF-IW	Luci EFRO IP65 862	216
	LRO-1142-*-DF-IW	Luci EFRO IP65 1142	216
	LRO-PT-A	Mounting clip for EFRO	217
	LRO-RL-EC	End cap for aluminum rail	217
	LRO-RL0164-AL	Aluminum mounting rail for EFRO 164	217
	LRO-RL0304-AL	Aluminum mounting rail for EFRO 304	217
	LRO-RL0584-AL	Aluminum mounting rail for EFRO 584	217
	LRO-RL0864-AL	Aluminum mounting rail for EFRO 864	217
	LRO-RL1144-AL	Aluminum mounting rail for EFRO 1144	217

Model No. INDEX

	Model No.	Product name	Page
LRS	LRS-100-24	100W Single Output Switching Power Supply	252
	LRS-150-24	150W Single Output Switching Power Supply	252
	LRS-35-24	35W Single Output Switching Power Supply	252
LSX	LSX-PT-A	Outer Clip for silux	137
	LSX-PTL	Lift clip for silux	137, 147
	LSX-PTM-C	Mounting clip K for silux	137, 147
LSXK	LSXK-0074-*DF-I-13	Luci silux K 13.3W/m 74	136
	LSXK-0074-*DF-I-4	Luci silux K 4.3W/m 74	136
	LSXK-0074-*DF-I-8	Luci silux K 8.1W/m 74	136
	LSXK-0259-*DF-I-13	Luci silux K 13.3W/m 259	136
	LSXK-0259-*DF-I-4	Luci silux K 4.3W/m 259	136
	LSXK-0259-*DF-I-8	Luci silux K 8.1W/m 259	136
	LSXK-0388-*DF-I-13	Luci silux K 13.3W/m 388	136
	LSXK-0388-*DF-I-4	Luci silux K 4.3W/m 388	136
	LSXK-0388-*DF-I-8	Luci silux K 8.1W/m 388	136
	LSXK-0509-*DF-I-13	Luci silux K 13.3W/m 509	136
	LSXK-0509-*DF-I-4	Luci silux K 4.3W/m 509	136
	LSXK-0509-*DF-I-8	Luci silux K 8.1W/m 509	136
	LSXK-0573-*DF-I-13	Luci silux K 13.3W/m 573	136
	LSXK-0573-*DF-I-4	Luci silux K 4.3W/m 573	136
	LSXK-0573-*DF-I-8	Luci silux K 8.1W/m 573	136
	LSXK-0702-*DF-I-13	Luci silux K 13.3W/m 702	136
	LSXK-0702-*DF-I-4	Luci silux K 4.3W/m 702	136
	LSXK-0702-*DF-I-8	Luci silux K 8.1W/m 702	136
	LSXK-0823-*DF-I-13	Luci silux K 13.3W/m 823	136
	LSXK-0823-*DF-I-4	Luci silux K 4.3W/m 823	136
	LSXK-0823-*DF-I-8	Luci silux K 8.1W/m 823	136
	LSXK-1008-*DF-I-13	Luci silux K 13.3W/m 1008	136
	LSXK-1008-*DF-I-4	Luci silux K 4.3W/m 1008	136
	LSXK-1008-*DF-I-8	Luci silux K 8.1W/m 1008	136
	LSXK-1137-*DF-I-13	Luci silux K 13.3W/m 1137	136
	LSXK-1137-*DF-I-4	Luci silux K 4.3W/m 1137	136
	LSXK-1137-*DF-I-8	Luci silux K 8.1W/m 1137	136
	LSXK-1451-*DF-I-13	Luci silux K 13.3W/m 1451	136
	LSXK-1451-*DF-I-4	Luci silux K 4.3W/m 1451	136
	LSXK-1451-*DF-I-8	Luci silux K 8.1W/m 1451	136
LSXWK	LSXWK-PT-A	Outer Clip for silux wide	147
	LSXWK-0074-*DF-I-13	Luci silux wide K 13.3W/m 74	146
	LSXWK-0074-*DF-I-8	Luci silux wide K 8.1W/m 74	146
	LSXWK-0074-*DF-I-4	Luci silux wide K 4.3W/m 74	146
	LSXWK-0259-*DF-I-13	Luci silux wide K 13.3W/m 259	146
	LSXWK-0259-*DF-I-4	Luci silux wide K 4.3W/m 259	146
	LSXWK-0259-*DF-I-8	Luci silux wide K 8.1W/m 259	146
	LSXWK-0388-*DF-I-13	Luci silux wide K 13.3W/m 388	146
	LSXWK-0388-*DF-I-4	Luci silux wide K 4.3W/m 388	146
	LSXWK-0388-*DF-I-8	Luci silux wide K 8.1W/m 388	146
	LSXWK-0509-*DF-I-13	Luci silux wide K 13.3W/m 509	146
	LSXWK-0509-*DF-I-4	Luci silux wide K 4.3W/m 509	146
	LSXWK-0509-*DF-I-8	Luci silux wide K 8.1W/m 509	146
	LSXWK-0573-*DF-I-13	Luci silux wide K 13.3W/m 573	146
	LSXWK-0573-*DF-I-4	Luci silux wide K 4.3W/m 573	146
	LSXWK-0573-*DF-I-8	Luci silux wide K 8.1W/m 573	146
	LSXWK-0702-*DF-I-13	Luci silux wide K 13.3W/m 702	146
	LSXWK-0702-*DF-I-4	Luci silux wide K 4.3W/m 702	146
	LSXWK-0702-*DF-I-8	Luci silux wide K 8.1W/m 702	146
	LSXWK-0823-*DF-I-13	Luci silux wide K 13.3W/m 823	146
	LSXWK-0823-*DF-I-4	Luci silux wide K 4.3W/m 823	146
	LSXWK-0823-*DF-I-8	Luci silux wide K 8.1W/m 823	146
	LSXWK-1008-*DF-I-13	Luci silux wide K 13.3W/m 1008	146
	LSXWK-1008-*DF-I-4	Luci silux wide K 4.3W/m 1008	146
	LSXWK-1008-*DF-I-8	Luci silux wide K 8.1W/m 1008	146
	LSXWK-1137-*DF-I-13	Luci silux wide K 13.3W/m 1137	146
	LSXWK-1137-*DF-I-4	Luci silux wide K 4.3W/m 1137	146
	LSXWK-1137-*DF-I-8	Luci silux wide K 8.1W/m 1137	146
	LSXWK-1451-*DF-I-13	Luci silux wide K 13.3W/m 1451	146
	LSXWK-1451-*DF-I-4	Luci silux wide K 4.3W/m 1451	146
	LSXWK-1451-*DF-I-8	Luci silux wide K 8.1W/m 1451	146

	Model No.	Product name	Page
LTH	LTH-0100-*-DF-I	Luci THOF 100	120
	LTH-0500-*-DF-I	Luci THOF 500	120
	LTH-1000-*-DF-I	Luci THOF 1000	120
	LTH-PTA	Mounting parts A	115, 121
LVF	LVF-GS1000-*	Glare cut shield for Vivoxy FLEX rail 1000	165
	LVF-GSS1000-*	Glare cut shield with silicone for LVF 1000	165
	LVF-PT-A	Adjustable SUS bracket for LVF rail	165
	LVF-RL0030-AL-*	Mounting Parts for Vivoxy FLEX	165
	LVF-RL1000-AL-*	Bendable AL rail 1000 for Vivoxy FLEX	165
	LVF40-*-S-35-*-O-16-*	Luci Vivoxy FLEX IP67 One side lead wire 16W/m 35°	164
	LVF40-*-S-35-*-O-24-*	Luci Vivoxy FLEX IP67 One side lead wire 24W/m 35°	164
	LVF40-*-S-50-*-O-16-*	Luci Vivoxy FLEX IP67 One side lead wire 16W/m 50°	164
	LVF40-*-S-50-*-O-24-*	Luci Vivoxy FLEX IP67 One side lead wire 24W/m 50°	164
	LVF40-*-S-SP2-*-O-16-*	Luci Vivoxy FLEX IP67 One side lead wire 16W/m 22°×35°	164
	LVF40-*-S-SP2-*-O-24-*	Luci Vivoxy FLEX IP67 One side lead wire 24W/m 22°×35°	164
	LVF40-*-W-35-*-O-16-*	Luci Vivoxy FLEX IP67 Bothendsleadwire 16W/m 35°	164
	LVF40-*-W-35-*-O-24-*	Luci Vivoxy FLEX IP67 Bothendsleadwire 24W/m 35°	164
	LVF40-*-W-50-*-O-16-*	Luci Vivoxy FLEX IP67 Bothendsleadwire 16W/m 50°	164
	LVF40-*-W-50-*-O-24-*	Luci Vivoxy FLEX IP67 Bothendsleadwire 24W/m 50°	164
	LVF40-*-W-SP2-*-O-16-*	Luci Vivoxy FLEX IP67 Bothendsleadwire 16W/m 22°×35°	164
	LVF40-*-W-SP2-*-O-24-*	Luci Vivoxy FLEX IP67 Bothendsleadwire 24W/m 22°×35°	164
LVV	LVV-PT-A	Mounting fixture for Vivoxy Graze	99, 107
	LVV-PT-B	Adjustable mounting fixture for Vivoxy Graze	99, 107
	LVV-PT-C	Fall prevention mounting fixture for Vivoxy Graze	99, 107
	LVV50-0300-*-SP-I	Luci Vivoxy Graze 300	98
	LVV50-0600-*-SP-I	Luci Vivoxy Graze 600	98
	LVV50-0900-*-SP-I	Luci Vivoxy Graze 900	98
	LVV50-1200-*-SP-I	Luci Vivoxy Graze 1200	98
	LVV50-LV0150	Louver for Vivoxy Graze	99, 107
LVVTH	LVVTH50-0300-NL27-SP-I	Luci Vivoxy Graze THOF 300	106
	LVVTH50-0600-NL27-SP-I	Luci Vivoxy Graze THOF 600	106
	LVVTH50-0900-NL27-SP-I	Luci Vivoxy Graze THOF 900	106
	LVVTH50-1200-NL27-SP-I	Luci Vivoxy Graze THOF 1200	106
MG	MG-A	Magnet set A	127, 137, 147
	MG-L	Magnet set L	127, 137, 147
	MG-R	Magnet set for rail	49, 59, 63, 71, 77, 85
P	PWM-120-24	120W PWM 24V dimmable driver	243
	PX0408	DMX Driver 8A*4ch	241
W	WALLDIM 103E1	1-10V dimmer	242
	WALLDIM 202	Multi-function touch panel controller	244

Luci Pte. Ltd.

Singapore World HQ

52A Tanjong Pagar Road, Singapore 088473

Tel : +65-6291-2410

Hong Kong Marketing Office

Unit 601-02, 6/F Union Park Tower, 168 Electric Road, Fortress Hill, Hong Kong

Tel : +852-2219-8462

Group company

Luci Co., Ltd.

Tokyo Japan Regional HQ

Akasaka Bldg. 4F, 4-13-13, Akasaka, Minato-ku, Tokyo 107-0052, Japan

Tel : +81-3-6327-7409 Fax : +81-3-6327-7410

Osaka Office

Yotsubashinakano Bldg. 3F, 1-1-14, Minamihorie,

Nishi-ku, Osaka-shi, Osaka 550-0015, Japan

Tel : +81-6-6110-7520

Group company

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ : 上海本社

Rm.1804, South Building, 300 Xuanhua Rd., Changning District,

Shanghai(200050)PRC.

上海市長寧區宣化路 300 号華寧國際廣場南塔 1804 室

Tel : +86-21-5238-9115

Beijing Office : 北京分公司

Rm.1030 Building102, (Qingnian Rd) Qingniangongshe., Chaoyang North Rd,

Chaoyang District, Beijing(100026)PRC.

北京市朝陽區朝陽北路 129 号院潤楓嘉尚 1 号楼 2011,100025

Tel : +86-10-6556-9541

Partner Company Korea

KOREA SANSHO SHOJI Co., Ltd.

韓國三昌商事株式會社

#507, 36, Teheran-ro 87gil, Gangnam-gu, Seoul, 06164, Korea

Tel : +82-2-508-2541



Contact us

info@luci.co.jp

